


# SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1904, by Munn & Co.]

Vol. XC.—No. 18.  
ESTABLISHED 1845.

NEW YORK, APRIL 30, 1904.

[5 CENTS A COPY  
\$3.00 A YEAR.]

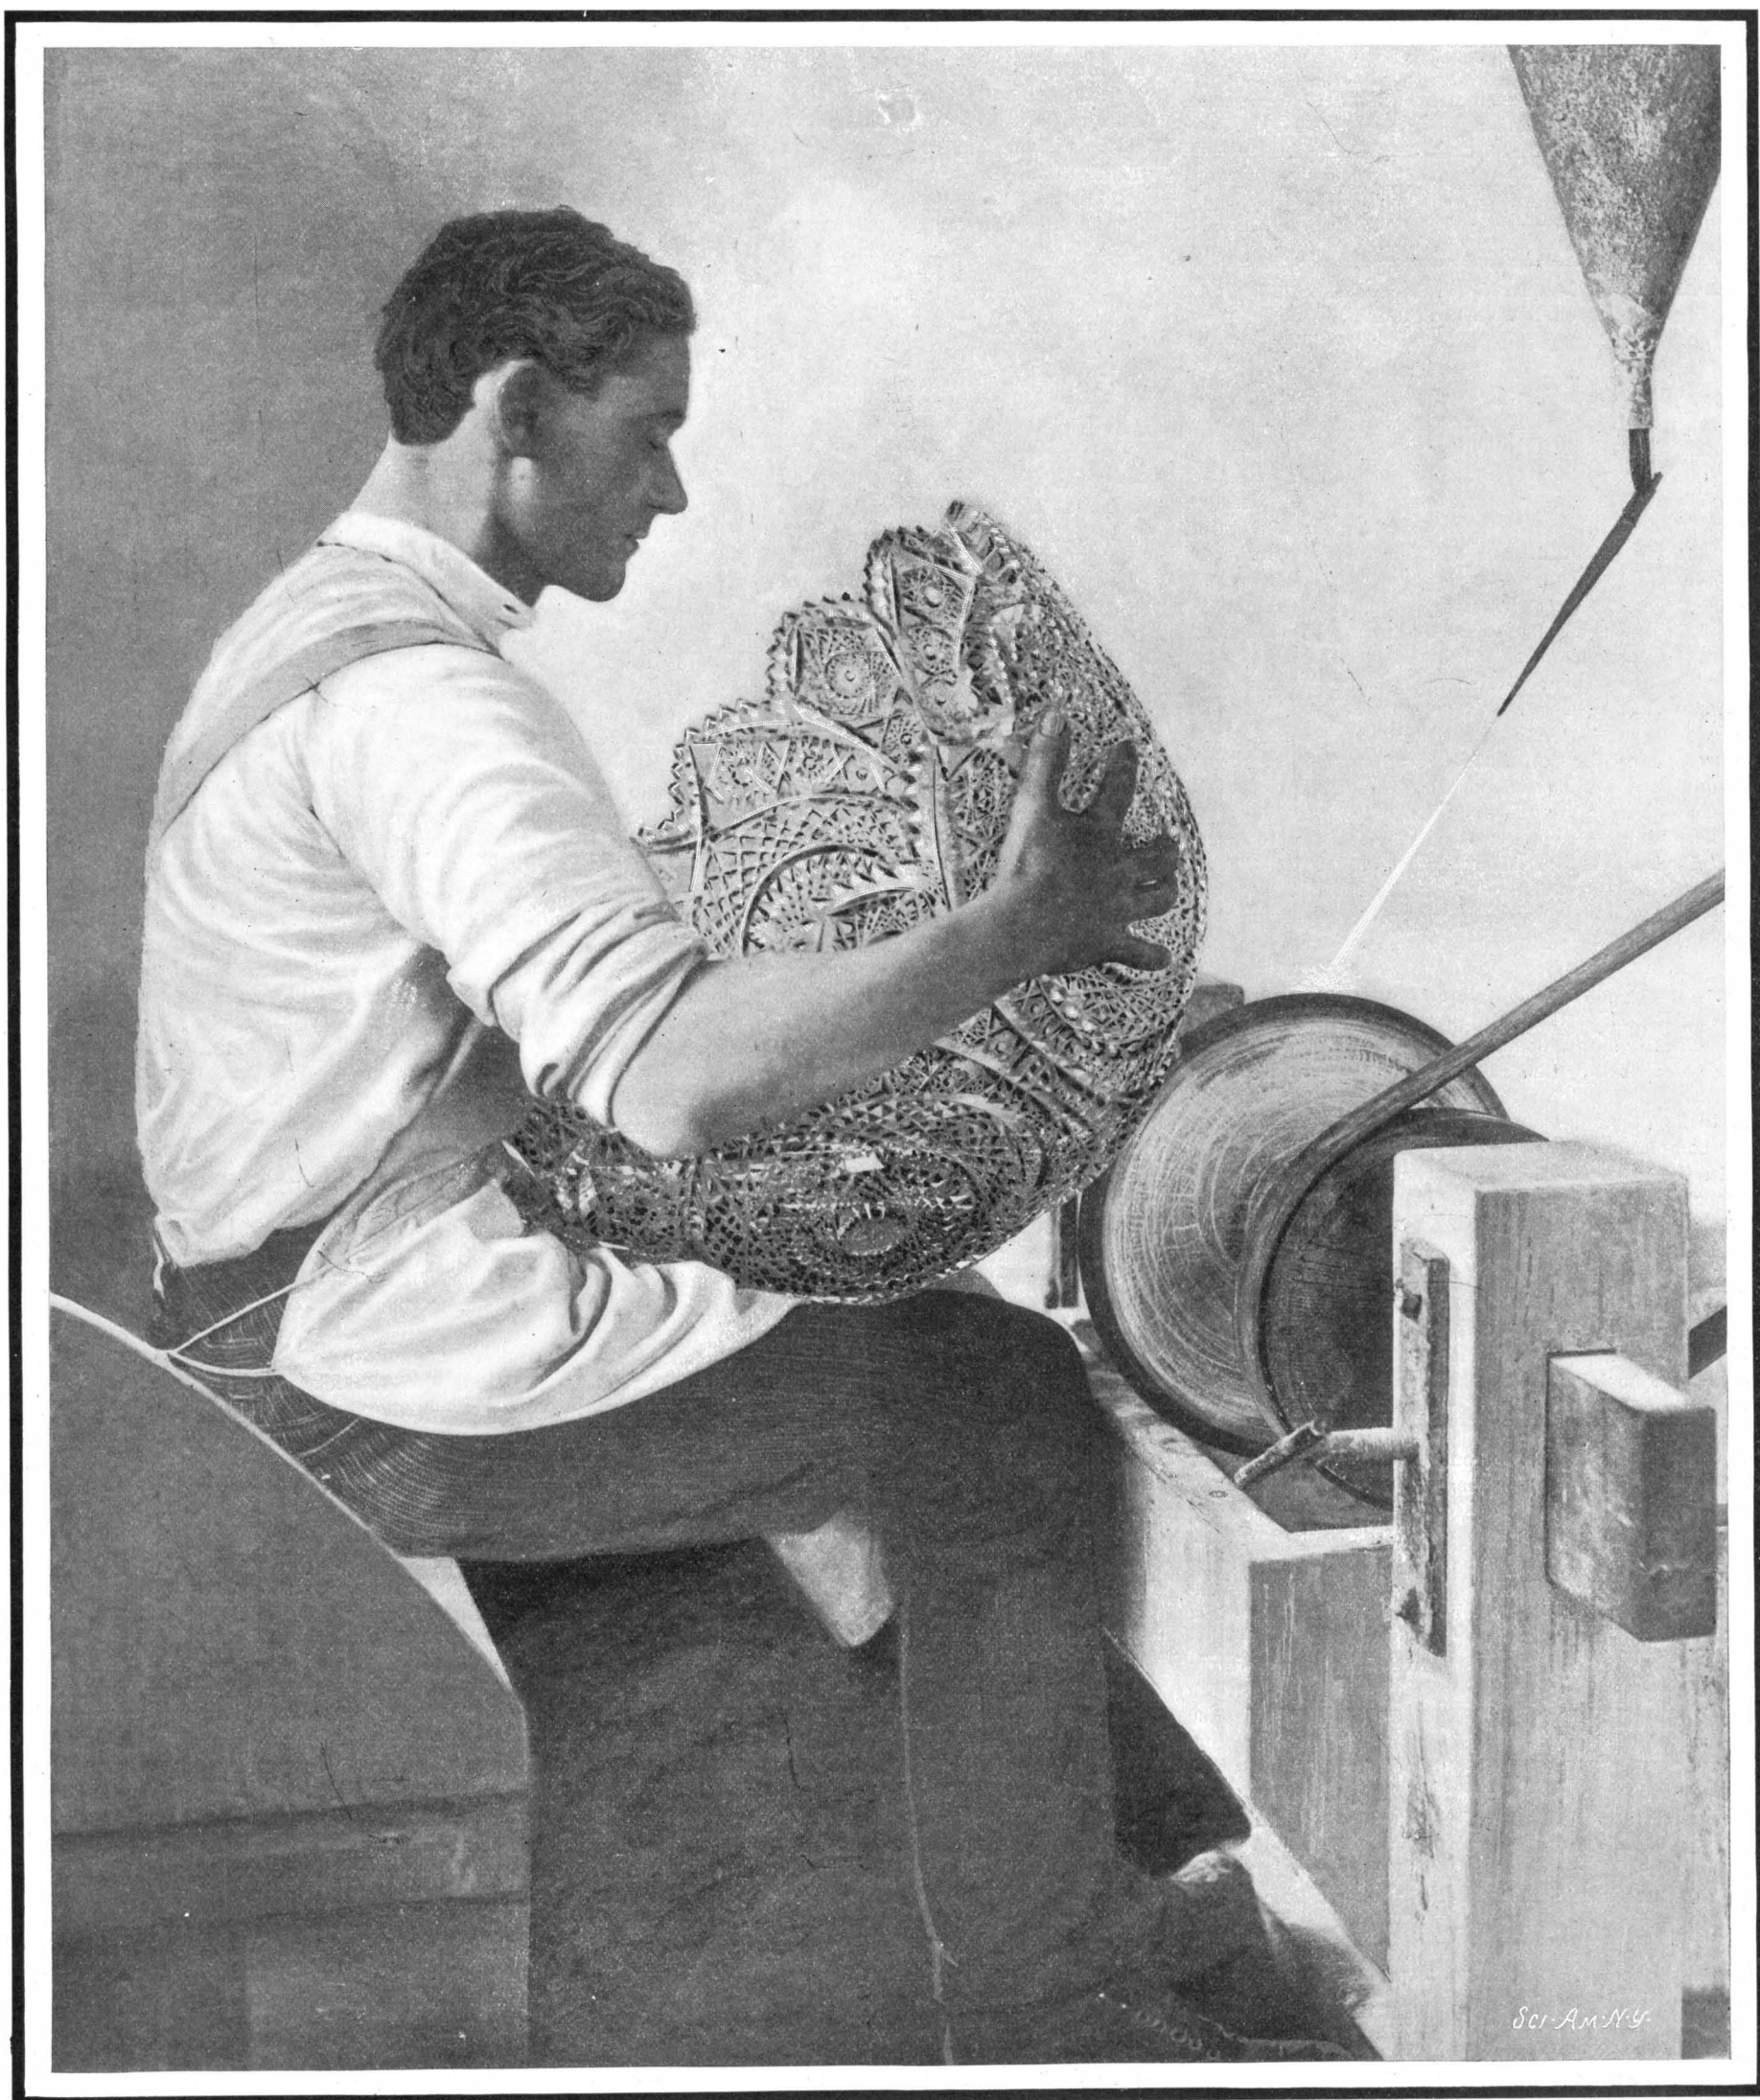

Polishing a 25-Inch Glass Bowl for Exhibition at the St. Louis Exposition. Height with Foot, 24 Inches; Weight of Bowl and Foot Before Cutting, 143 Pounds.

THE LARGEST PIECE OF CUT GLASS IN THE WORLD.—[See page 348.]

## SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN &amp; CO., - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

## TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico.....\$3.00  
 One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

## THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845).....\$3.00 a year  
 Scientific American Supplement (Established 1876).....5.00 "  
 Scientific American Building Monthly (Established 1885).....2.50 "  
 Scientific American Export Edition (Established 1878).....3.00 "  
 The combined subscription rates and rates to foreign countries will be furnished upon application.

Remit by postal or express money order, or by bank draft or check.  
 MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, APRIL 30, 1904.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are sharp, the articles short, and the facts authentic, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

## THE AQUEDUCT COMMISSIONERS AND THE NEW YORK CITY WATER SUPPLY.

The object of constructing the new Croton dam, which was begun in 1892, was to relieve the pressing danger of a water famine in the city by increasing the storage capacity of the Croton system to its fullest extent. The Jerome Park reservoir was begun in 1895, with the object of providing an adequate distributing reservoir within the city limits, capable of impounding between two billion and three billion gallons of water, and providing Manhattan and the Bronx with from a week's to ten days' supply of water, which could supply the city temporarily, should there occur any break in the thirty-five miles of the new Croton aqueduct. It was the intention of the contracts that the new Croton dam be finished by July 1, 1899, and Jerome Park reservoir by November 1, 1902. As matters now stand, four years and ten months have passed since the contract date of completion of the Croton dam, and over two years more will be required to complete the structure. That is to say, if we may be so optimistic as to hope that the intolerable delays that have marked the construction of this dam in the past will not be repeated, it is possible that this urgently-needed work will be ready for public use seven years after the date on which it should have been completed, the contract taking fourteen instead of the seven years contemplated and promised for its execution. In 1903 the Acting Chief Engineer, in an official report to the Aqueduct Commissioners, stated that the Jerome Park reservoir, at the then rate of progress, would not be finished in less than four years from that date, that is to say, five years after the original contract date for completion.

In the presence of these astounding facts, it is not surprising to learn that the Merchants' Association of this city, whose good work in the safeguarding of the city's interests is on record, have considered the matter to be so serious as to call for the preferring of charges against the Board of Aqueduct Commissioners, upon whose shoulders they consider that the chief blame for this inexcusable neglect of the city's interests is to be laid. The Association states that it can be clearly shown, by the records of the Aqueduct Commission, that the Commissioners had knowledge of the grave exigencies confronting this city in the way of a possible water famine, and that they have explicitly recognized the need for expedition in providing new reservoirs; that these Commissioners have been specifically informed, by their Chief Engineers and by the Department of Water Supply, that action was urgently necessary for the due progress of the work; and that although they were thus informed, they refrained during several years from taking any steps toward compelling the active prosecution of the work and, indeed, that at no time since 1898 have they taken any effective or proper steps to compel the contractors of either the Cornell dam or the Jerome Park reservoir to observe their contract obligations as to time. The Merchants' Association claims that it is shown by the Aqueduct Commissioners' report that, in the case of the new Croton dam, the Chief Engineer, as far back as 1899, protested officially to the Aqueduct Commission against "the inexcusably flagrant delay" of the contractors, and recommended measures to compel satisfactory progress; but that no measures to compel progress were adopted at the time or since. It is further charged that in the case of Jerome Park reservoir also, the Aqueduct Commissioners have taken no action of any kind to enforce a reasonable degree of progress, despite the obvious and unjustifiable delay in every branch of the work, including the complete stoppage for about four years of work upon the northern half of the reservoir, on which expedition had been previously ordered by the engineers,

The indifference of the Aqueduct Commissioners to the needs of the city is claimed to be the more culpable, because they have repeatedly granted unmerited extensions of time, and this in the face of many reports made to them by their own engineers, that the contractors' delay was extreme and altogether unnecessary. These are grave charges, and in view of the unparalleled delay on both these urgently-needed public works, the public will not fail to draw its own conclusions as to the inefficiency of the Aqueduct Commissioners, and their apparent indifference to the trust that has been reposed in them.

The Commission is a body of laymen who were appointed for the express purpose of safeguarding the city's interests and seeing to it, not merely that contractors do their work well, but that they do it within contract time. Now, the SCIENTIFIC AMERICAN is perfectly well aware that there have been justifiable causes for some of the delay. There has been a change from core wall to solid masonry on a portion of the Croton dam, while at Jerome Park further delay has been occasioned by a similar change from core-wall embankments to solid retaining walls. We are perfectly willing to admit that these changes were necessary at the Croton dam, and that they may have been to a certain extent necessary at Jerome Park reservoir; but having admitted this much, we must confess that after reviewing the history of these two works, and going carefully over the charges made by the Merchants' Association, we cannot but feel that the Commission has done very little to justify its existence. Amid the continued and reiterated complaints against the delay in these works, we fail to remember a single instance in which the voice of the Commission has been heard in similar expostulation. Judging by its silence, the citizens of New York might well believe that the delay was causing the Commission but very little uneasiness.

It is gratifying to know that the charges of the Merchants' Association will be presented before a Mayor who has shown himself to be thoroughly independent and fearless in protecting and promoting the welfare of the city over which he presides.

## LONGITUDINAL BULKHEADS AND BATTLESHIP STABILITY.

A correspondent has asked us to give an editorial discussion of the probable cause of the Russian battleship "Petropavlovsk's" capsizing so suddenly. At the outset we must frankly confess that in the present state of our knowledge of this disaster, it is impossible to give a definite answer; but we are inclined to think that, when our correspondent asks if the capsizing of the ship was due to a too great subdivision of the water-tight compartments, he has failed to understand the true functions of the multiple-compartment system. The primary object of subdivision is to localize the effect of under-water penetration of the hull, so that should a vessel run aground, the entering water would be confined to certain compartments of a limited capacity, and her buoyancy would not be too seriously impaired. An ordinary grounding of the vessel, a ripping open of the outer shell by a jagged point of rock, will usually admit water only to the double bottom. This has been shown in the majority of the accidents of this character to our own ships that have happened of late years. As a defense against the smashing in of a considerable area of the under-water hull by the ram or by the torpedo, it is customary to divide the ship transversely by several bulkheads, and also by a continuous longitudinal bulkhead that bisects the ship in the line of the keel from stem to stern. The various compartments thus formed are further subdivided both longitudinally and laterally, particularly in the wake of the magazines and engine and boiler rooms.

Our correspondent is under the impression that the capsizing of the "Petropavlovsk" was largely due to the existence of the longitudinal bulkheads, and he asks whether, had there been no bulkheads of this kind, the water would not have distributed itself across the vessel, and, by preventing the ship from listing heavily, have delayed her sinking until the majority of the crew had been rescued. The question is not by any means a new one, for it was brought into prominence many years ago by the sinking of the British battleship "Victoria," when she was rammed by the "Camperdown" during naval maneuvers in the Mediterranean, and went down with Admiral Tryon and most of her officers and crew. The hull was perforated on the starboard side a little forward of the 16¼-inch gun turret. The water entered rapidly, and, filling the starboard compartments, it caused the ship to list so quickly that she "turned turtle" before the boats from the other ships of the fleet could rescue her crew.

A naval board of inquiry that investigated the disaster considered the question of removing the longitudinal bulkheads, with a view to preventing the quick capsize of a rammed or torpedoed warship. But it was decided that, all things considered, longitudinal bulkheads were desirable; and they remain to-day a most important feature in the design of all modern warships. Furthermore, it is a mistake to suppose that all longi-

tudinal bulkheading is water-tight. The keel of the ship in the double-bottom, and some of the other longitudinal members there, are perforated for the express purpose of allowing the water to flow freely across the ship in case of injury to the bottom. To follow out the same principle, however, on the various decks, would be to double, and in some cases quadruple, the amount of water that would be admitted to a ship were she rammed or torpedoed, a result which would merely mean that buoyancy was sacrificed to stability.

That the accepted system of subdivision is the correct one has received most emphatic demonstration in the present war; for there seems to be very little doubt that the quick loss of the "Petropavlovsk" was due to the fact that when the burst of flame of the exploded mine or torpedo tore its way into the ship, it ignited and exploded the magazines and rent the ship asunder, the action being similar to that which occurred in the case of our own battleship "Maine" in Havana Harbor. Therefore, the sinking of the "Petropavlovsk" can scarcely be quoted against the longitudinal subdivision system. The true test came in the case of the two battleships "Czarevitch" and "Retvizan," and the cruiser "Pallada," which were torpedoed in the opening engagement at Port Arthur. These vessels were undoubtedly saved by their elaborate system of subdivision of hull; for they were able to proceed from the outer roadstead under their own steam and beach themselves, thereby rendering subsequent salvage operations and repairs possible. Naval constructors, generally, consider that the salvage of these ships is a great tribute to the efficiency of the present cellular system of construction.

## THE PREPARATION OF PURE ARGON.

In a paper recently read before the Academie des Sciences, Messrs. Henri Moissan and A. Rigaut describe a method which they use for preparing argon in large quantities in a pure state. In their first experiments, Lord Rayleigh and Sir Wm. Ramsay used the action of the spark on a mixture of oxygen and nitrogen, in order to separate the argon of the air. Afterward they used metallic magnesium, which retains the nitrogen in the form of nitride. In more recent experiments, Ramsay used the action of a mixture of lime and magnesium on the nitrogen of the air.

M. Moissan had previously shown that calcium combines easily with nitrogen at a low red heat, giving a crystalline nitride having the formula  $\text{Ca}_3\text{N}_2$ . As metallic calcium also has the property of absorbing hydrogen at the same temperature, giving a crystalline hydride  $\text{CaH}_2$ , and as this hydride is not dissociated at 500 deg. C., the writers proposed to apply these properties of the metal for the extraction of argon from the air. The preparation of the argon includes four different operations. 1. Preparation of 100 liters of nitrogen. 2. Increasing the proportion of argon contained in the gas. 3. First purification. 4. Second purification by circulating the gases over calcium. In this way a practically pure argon is obtained. The first operation is carried out by using two tubes 4 feet long and 1.2 inch inside bore, filled with copper turnings which had been first oxidized in air, then reduced by hydrogen. The gas is drawn through the tubes by suction into a gas-holder. The proportion of argon in the gas is then increased by making it pass through an iron tube 3 feet long filled with copper turnings; then, after a set of sulphuric acid and potash tubes, the gas passes through two iron tubes 2.5 feet long, filled with a mixture of 5 parts powdered quicklime and 3 of powdered magnesium. The tube containing the copper is heated to redness. After driving off the hydrogen, a rubber bag is placed at the end of the apparatus. Then 100 liters of nitrogen are passed in the apparatus, and in two hours it becomes diminished in volume and is brought down to 10 liters. The gas which is collected in the rubber bag contains 10 per cent of argon.

The next step (purifying the gas) is carried out by passing the gas through a potash drier into a large tube of Berlin porcelain 3 feet long and 1.5 inches diameter. The tube is heated in a Mermet furnace. It receives a sheet iron trough containing 80 grammes of the lime and magnesium mixture. After it comes a second tube of Jena glass containing the same mixture, then a smaller tube full of copper oxide. A sulphuric acid and potash drier complete the apparatus, which is connected to a mercury pump for the purpose of drawing the gas through and sending it into a large glass collecting cylinder 2.8 feet high and having a capacity of 1,100 cubic centimeters (67.14 cubic inches). By repeated operations, the pump empties the gas-bag in 2 hours. The gas which is finally collected is nearly pure argon, containing only 5 to 10 per cent of nitrogen.

To obtain a practically pure argon, the following operation is carried out: The gas is passed from the cylinder through a tube of Jena glass containing 45 grammes of lime and magnesium mixture. After it comes a second tube containing four troughs of nickel in which are placed 3 or 4 grammes of metallic calcium in small pieces. Two mercury pumps are connected to the apparatus by a three-way cock. The first pump serves



to produce a vacuum in the apparatus in the beginning. The second causes the circulation of the gas in the tubes, which are heated to low redness. In this way, by applying the characteristic properties of calcium noted by M. Moissan, the small quantities of nitrogen and hydrogen are retained by the calcium and the argon comes off in a practically pure state. The gas is collected in bottles of 250 c.c. capacity. To find out whether the argon is pure, it was studied by the spectrum of an induction spark, which showed the characteristic lines for argon, while nitrogen was practically absent. This new method therefore affords a good working process for preparing pure argon in considerable quantities.

#### SOARING FLIGHT.

BY GARRETT P. SERVISS, JR.

Among the many phenomena exhibited by flying birds, and observed and studied in attempted solution of that most interesting and baffling of all engineering problems, mechanical flight, there is one which is so remarkable in its paradoxical nature, that it has attracted perhaps more attention than all the others together. I refer to soaring, or, as it is sometimes called, sailing, and, in one of its aspects, aspiration. In performing this feat, the bird holds its outstretched wings absolutely motionless, and remains suspended in the air, traveling in any desired direction without, so far as can be observed, the expenditure of the slightest amount of energy. This feat seems so absolutely impossible on first sight that men have doubted their own senses, and have taken photographs of soaring birds, hoping that the camera plate, more rapid than the eye, would be able to detect some lightning-like movement of wing which would account for the bird's support. So far as the writer is aware, no such movement was ever detected. It remains then for us to explain the phenomena on mechanical principles, or else to admit that our theories of the action of elastic fluids, such as the air, are erroneous. Such explanations have been given, it is true, but so many of them are erroneous—indeed, I hope to show that only one of them is entirely reasonable—that it seems desirable to review them, and to endeavor to show that there is one other way in which the birds frequently use the energy of the wind for their support and propulsion.

For convenience in reviewing the explanations already suggested, it will be well to divide them into three general classes:

1. Attempts to explain soaring in uniform horizontal winds.
2. Explanations which require the assumption of ascending wind currents.
3. Explanations depending upon a wind continually varying in velocity or direction, or both.

The advocates of the first class of explanations have held that some particular shape of the bird's wings might have a peculiar action upon the air, so deflecting it that the wing would be forced upward and forward into the teeth of the wind. Others have invented highly ingenious but totally inadequate evolutions, by the performance of which the bird would be enabled to gain elevation, and eventually travel in any direction by sailing down an inclined path. It is not necessary here mathematically to treat in detail these explanations, though it is entirely possible. It will suffice to show by very simple considerations, the essential fallacy involved in any theory of soaring in uniform horizontal air currents. In the first place, consider a bird being supported stationary in the wind. The downward pull of gravity upon the bird must be counteracted by an equivalent upward force. This upward force on the bird has its reaction upon the air particles under the bird's wings, and the downward force on the air produces a downward acceleration of the air particles, which, combining with their forward motion, produces a resulting velocity greater than the original velocity. This means that the air, in passing the bird, has its energy increased, which is contrary to the law of the conservation of energy. In case the bird is performing evolutions instead of remaining stationary, the force upon the bird and air particles varies both in direction and amount, but an integration still shows an increase of total energy in the wind.

This is the basis of an exact treatment, and is given because the increase or non-increase in total energy of the wind when passing the bird furnishes a universal criterion for determining the possible correctness of any explanation of the phenomenon in question. A much simpler conception, however, has been suggested by someone, and we will give this briefly before taking up the next class of explanations. The air confined in a railroad car in motion constitutes a true uniform horizontal wind with regard to the earth. Yet no one could conceive of a bird performing evolutions with motionless wings, and remaining supported indefinitely in the air carried by the car.

In the second class of explanations, it is assumed that the lower strata of air moving over the earth's surface are retarded by friction and piled up, thus de-

flecting the strata above, and giving the wind a slight trend upward. Marked upward wind currents also exist over natural wind breaks, and on the slopes of hills when the wind is blowing toward the higher ground. Soaring birds, it has been stated by careful observers, seem to prefer such places in which to perform their aerial evolutions. Granting the existence of upward wind currents, we can understand one way in which soaring is accomplished.

Consider a kite against which a horizontal wind is blowing. The pressure of the air is normal to the kite surface, and is thus a force directed upward and backward. If now the backward component is neutralized by the pull of the string, the kite will remain suspended in the air through the vertical component of the wind's pressure. If we release the string, the kite will drift backward by virtue of the horizontal component of pressure, and sink to the ground. Suppose, however, that the wind takes an upward trend. The kite may now be tipped down in front; and if the wind is rising at a sufficient angle, the kite may even take a horizontal position, and still present the same angle to the wind. In this case the pressure upon the kite, always normal, will become a vertical force. If the wind tends upward at a still greater angle, the kite may be tipped down in front until the front edge is lower than the back, in which case the horizontal component of the pressure is directed forward opposite to the direction of the wind. If the kite could maintain equilibrium, it would advance into the wind under these conditions, and remain in the air indefinitely. Kite experimenters have observed this very action at times, and it is a true case of soaring, or better, aspiration.

Thus we see that the existence of upward wind currents is sufficient to render flight without exertion possible, but that soaring is always or even frequently due to such currents is very doubtful. We must then look to our third class of explanations to complete the theory.

Prof. Langley, by careful measurements of air velocities, has shown that all winds are extremely variable, his readings having indicated changes in velocity of ten miles or more per hour in a small fraction of a second. His investigations are fully described in his paper, "The Internal Work of the Wind," but his theory will be briefly stated here. A bird flying in such a variable wind would be carried along at the average velocity of the air, while the alternate puffs of high and low velocity would constitute alternate virtual winds, first blowing by him in the direction of his motion, and then against him in the contrary direction, his inertia preventing him from following the rapid fluctuations. Under these conditions, the bird by facing about first toward the virtual wind in one direction, and then toward that in the other, could always present his inclined wings to a current of air, and obtain a supporting reaction. The facing about might be accomplished by sailing in circles, an evolution often observed. This in brief was Langley's theory, and highly ingenious it is. It may under exceptional conditions be the manner in which soaring is accomplished, but in ordinary winds the variations in velocity certainly cannot exceed fifteen miles an hour, and even if these variations occurred extremely rapidly, the bird would only be subjected to a virtual wind of less than seven miles per hour, which is totally inadequate to support any known soarer.

Looked at in a slightly different way, however, the writer believes that the variations in velocity of the wind may be shown to be sufficient to account for all the observed phenomena of soaring. In the first place, the relative velocity of the bird to the air, which is effective in supporting the former, must be quite high. Langley has shown that at certain velocities a plane may support as much as three hundred pounds per horse-power expended, but this velocity is much higher than the five or six miles an hour which is secured in the action just described. The bird, then, cannot drift with the same velocity as the average wind, but must possess a velocity of perhaps twenty miles an hour with regard to it, to obtain support with the energy available. How, then, can this internal energy existing in the wind by virtue of its streakiness be utilized to propel a body traveling at twenty miles an hour with regard to it? Obviously, only by taking advantage of changes in velocity occurring at right angles to the direction of the bird's motion. Each time such a change occurs, the bird has added to its velocity a perpendicular component, which, combining with the motion which it already had, produces a resultant velocity greater than the initial. Since the kinetic energy due to the bird's motion is proportional to the square of the velocity, and since the square of the resultant velocity is the sum of the squares of the initial and the impressed velocities (being perpendicular to each other) it is evident that the bird has absorbed all the energy which the variation in the velocity of the wind could impart, and converted it into energy of motion in its new path. Of course, if the acquired energy is being continually used for support, no increase in velocity will result.

In performing such an evolution, the bird would be forced to bring its wings into a more or less vertical position, to take full advantage of these horizontal puffs of wind, and this probably accounts for the frequency with which soaring birds move in circles, for while moving thus, the centrifugal force allows them to tip up the plane of their wings. In describing this path, the center of the circle may drift with the average wind, while the bird takes advantage of every favorable puff to produce an acceleration perpendicular to the tangent at the time it occurs. The writer has many times observed sea-gulls soaring in just such distorted circles as would be produced by this action. In this action the bird takes full advantage of the "internal work of the wind" to maintain the velocity for support which its ratio of weight to wing surface renders most efficient.

Whether or not this proves to be the final solution of the problem, it is evident that soaring is much too complicated for man to imitate, at least until he has had long experience with motor-driven machines.

#### SCIENCE NOTES.

E. Salvioni has devised and accurately examined a microbalance which consists of a thin thread or very thin ribbon of glass or other material, fixed at one end and placed in a closed case; the case also contains a number of small weights (the larger of platinum wire, the smaller of silk thread) which, with the aid of a handle, can be placed on the flexible thread or ribbon. The flexure of the thread when loaded is observed by means of an ocular micrometer, and, as verified by the author for his instrument, is proportional to the weight which produces it; a conveniently placed spider thread serves as a sight-line for the measurement of the displacements. A glass thread 10 centimeters long, and one of two-tenths of a millimeter in diameter, will support by flexure a weight of more than 100 milligrammes, and, if provided with an optical arrangement which magnifies one hundred times, will serve to weigh to one-thousandth of a milligramme. To avoid the inconvenience caused by subsequent elasticity, the balance is provided with a stop, which enables the flexure to be maintained after unloading. Salvioni finds that the loss of weight of musk by volatilization is clearly demonstrated by this instrument. The loss is proportional to the time.

In a study of the circulation of the atmosphere of the sun, in the Monthly Weather Review, Prof. Frank H. Bigelow presents a mass of data and observations showing that "the sun should be regarded as an incipient binary star." Recent scientific work in investigating the circulation of the solar atmosphere in accordance with the laws governing the convective and radiative action of a large mass of matter contracting by its own gravitation, have led Prof. Bigelow to the hypothesis, that "the single fiery envelope conceals two disks." A series of observations extending over many years on the period of solar rotation at various points on the surface shows that "the same meridian of the sun is seen twice in a single rotation of the entire mass, first as the eastern limb, and second, thirteen days later, as the western limb. Whatever may be the intrinsic activity of the sun at a given zone and on a given meridian, that display becomes visible twice, first to the east, and second, to the west." The tables prepared by Prof. Bigelow giving the rate of angular rotation of various zones of the sun's surface show that it is far from uniform, being increased in proportion to the distance from the equator. As yet little has been done regarding "the fundamental problem of the mode of the internal solar circulation." This difference of external activity of the sun "on two opposite sides of its mass, as if a certain diameter had greater energy than the one at right angles to it," is similar to a recent discovery of Prof. Bigelow in regard to the earth's atmosphere, and leads him to the conclusion already stated, that "this persistent excess of outflowing energy on two opposite sides of the sun suggests the possibility that the sun should be regarded as an incipient binary star where the dumbbell figure of rotation prevails instead of the spheroidal. If this is really the case, and the evidence suggests it, then there would be a reason for the existence of the two primary centers of activity of the sun instead of its having a single center. From this we would expect to find that the sun has two magnetic and two meteorological systems, and indeed some double-acting system appears to impress itself generally upon the solar cosmical relations. This view is quite in harmony with the well-known fact of the existence of numerous binary systems of suns more or less widely separated, and it can not be regarded as unlikely that the sun is developing in the same way. The enormous mass of the sun would seem to entice its constituents to group themselves preferably about two centers for the physical processes involved in circulation and radiation, rather than about one, and I suspect that this is the correct explanation of several well-known phenomena."

**A GERMAN HIGH-SPEED LOCOMOTIVE.**

It will be remembered that toward the close of the recent high-speed electrical tests on the Berlin-Zossen government railroad, it was decided to carry out another series of tests, this time of steam locomotives, to determine what was the highest practicable speed that could be obtained with railroad trains of a given weight hauled by steam locomotives of exceptional power designed especially for this work. The accompanying illustration was made from a photograph of one of these engines which, a short time ago, was completed at the works of Messrs. Henschel & Sohn, Cassel, Germany. The locomotive was designed to haul a train of four or five corridor passenger coaches, of a combined weight of 200 American tons at a sustained speed of 80 miles an hour, and with an indicated horse-power of 1,400.

The locomotive is a three-cylinder compound, with the high-pressure cylinder located inside, and the two low-pressure cylinders on the outside, of the frames. The inside high-pressure cylinder is connected to a crank on the axle of the forward pair of driving wheels, while the low-pressure cylinders are connected to the rear driving wheels; all four wheels are coupled together. Forward under the smokebox is a four-wheeled truck, and another four-wheeled truck is located beneath the firebox.

The tender is carried on two four-wheeled trucks, and all the wheels, both of locomotive and tender, are fitted with both hand and air brakes, the latter working under a pressure several pounds higher than is

**A New Mineral from Ceylon.\***

BY SIR WILLIAM RAMSAY.

In the beginning of February I bought from Mr. Holland five hundredweight of the mineral described by Prof. Dunstan in *Nature*. It crystallizes in cubes, and the density is substantially that found by him. Mr. Tyrer, of the Stirling Chemical Works, Stratford, was so kind as to promise to work it up for me, and the process is still being carried on.

I had hoped to have positive and definite results to communicate before describing its constituents, but the publication by Prof. Dunstan of an analysis, and his statement that he is still engaged in its investigation, makes it necessary to write this letter.

The mineral, when heated alone, gives off 3.5 cubic centimeters of helium per gramme; fused with hydrogen potassium sulphate, the amount is increased to 9.5 cubic centimeters. From this source I have already stored about 12 cubic feet of pure helium extracted in Mr. Tyrer's works.

It was at first believed that the mineral was rich in uranium, but different specimens contain only from 8 to 12 per cent of that element, agreeing in this respect with the analyses published by Prof. Dunstan. Next, the other main constituent was believed to be zirconium, but the high density of the mineral rendered this improbable. An analyst of high standing, whose daily business it is to analyze minerals of this kind, returned 82 per cent of zirconia as a constituent; the percentage of thorium was trifling—under 1 per cent. The mineral contains practically no thorium; this has


doubt, to the spontaneous change of the uranium which the mineral contains. But the radio-activity due to this source is certainly not 5 per cent of the total.

The period of decay of the emanation appears to point to the presence of a radio-active element closely resembling thorium X. The half value is 50 or 51 seconds, and while this is not quite the time for the decay of thorium emanation, it very nearly approaches it; at present the balance of evidence appears to point to the presence of an element closely resembling thorium, but not identical with it. The total radio-activity, moreover, is much greater than can be accounted for by the supposition that the one consists of pure thorium. Within the limits of a letter I am obliged to omit many more characteristics of this curious ore which have been ascertained, but I hope soon to be able to publish more definite results; as it is, I regret to have been obliged to tell an imperfect story.

I should like to conclude by acknowledging the great assistance given me in this work by Mr. Tyrer and by my students, Messrs. Gimmingham and Le Rossignol.

**Utilizing Whale Carcasses.**

It is announced that the American company which established the plant at Balena, Newfoundland, using the Russmuller process of utilizing the carcasses of whales, has met with complete success and that the government of Newfoundland has established new plants at Chateau, St. Lawrence, Agnaforte, Cape Royal, and Snooks Arm. There are now in the course

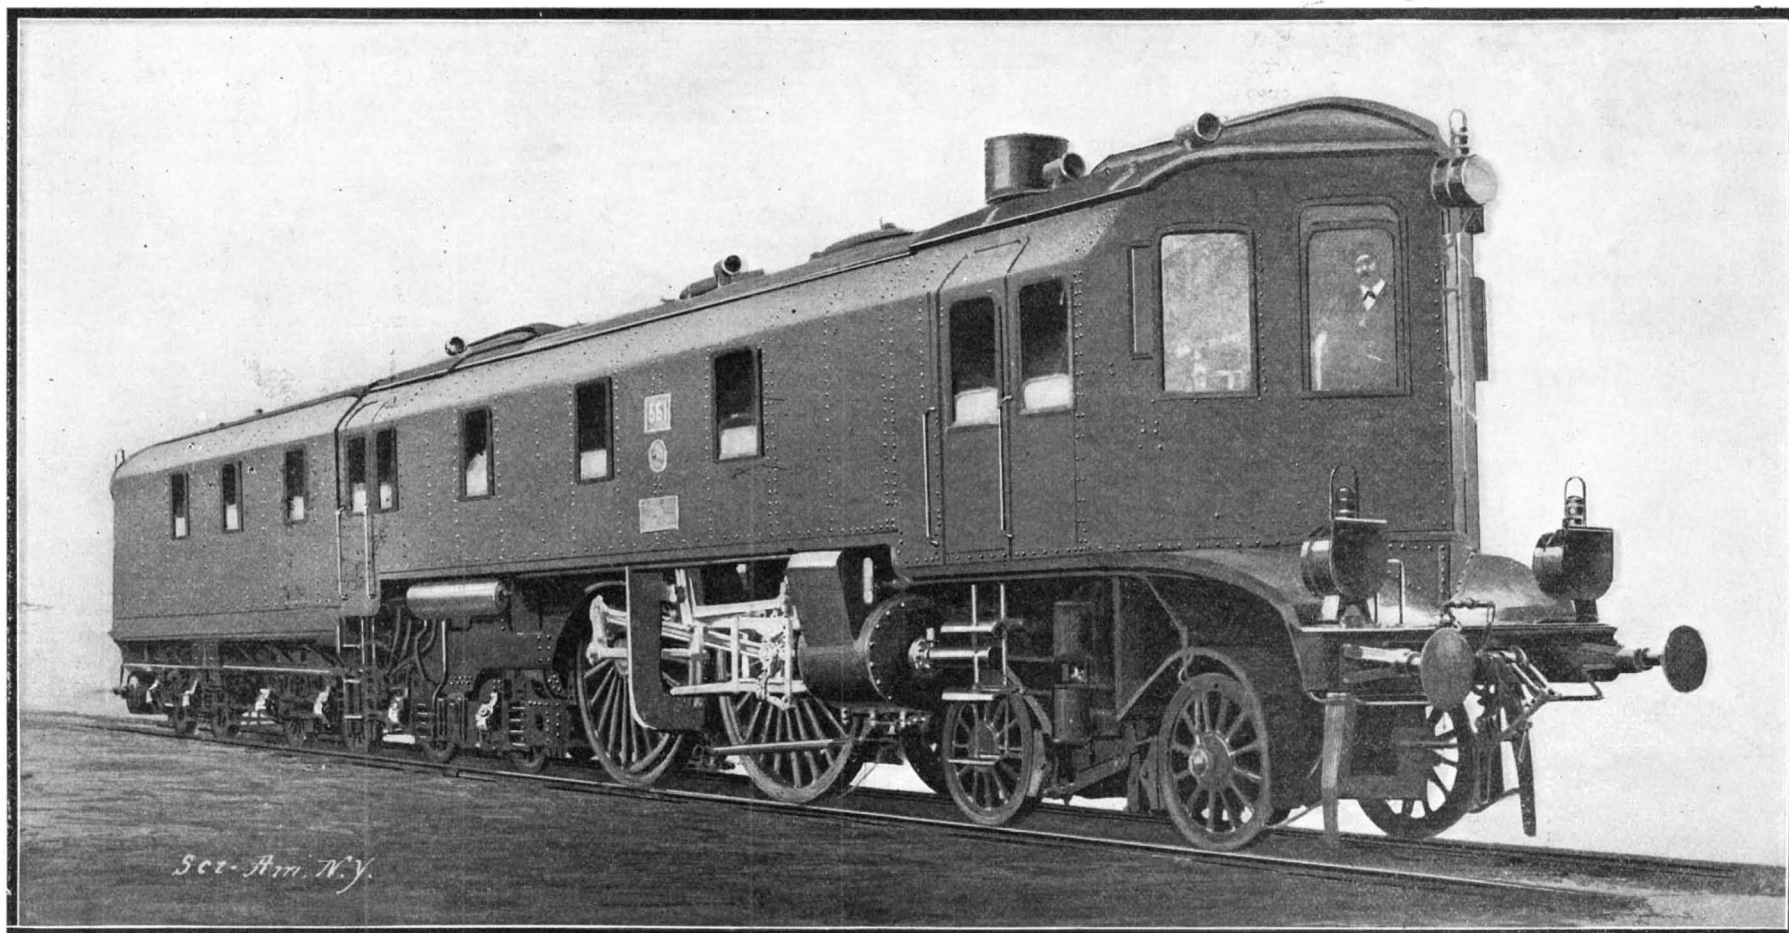

GERMAN HIGH-SPEED LOCOMOTIVE.

customary. The total length of the engine from the front of the locomotive to the rear of the tender is 81 feet. The peculiar appearance of the locomotive is due to the fact that both the engine and tender are completely incased in a sheet steel covering, which is finished at the front of the locomotive with a wedge shape, with the object of reducing the air resistance. The chief engineer has his cab in this wedge-shaped front, which is provided with large glass windows to give him an unobstructed view ahead. He has an assistant engineer in the cab, who takes his turn at stoking with the fireman. Communication between the fireman and engineer is had by means of running boards located inside the engine casing; while at the rear of the tender there is a gangway, which permits of communication from end to end of the train, from the engineer in his cab to the conductor or "guard" at the rear of the train.

The locomotive has a grate area of 50 square feet, and a heating surface of 3,000 square feet. The capacity of the tender is 4,000 gallons of water and 7 tons of coal. When it is fully equipped for service, the locomotive weighs 177,000 pounds, and the tender 128,000 pounds, the total weight of engine and tender being, therefore, about 150 short tons. This load has been so distributed that the concentrated wheel load will in no case exceed that which is allowed by the official regulations. It is interesting to know that this locomotive, which has been designed according to Baurat Wittfeld's data, is to be exhibited at the St. Louis World's Fair after a series of trial runs has been completed.

been repeatedly confirmed in my laboratory. Nor does it contain any appreciable amount of cerium, lanthanum, and didymium. The oxalate is almost completely soluble in excess of ammonium oxalate—a reaction which excludes thorium and the cerium group, but which points to zirconium. The equivalent of the elements of the oxalate group, which I at first took for zirconium, excludes the presence of any large quantity of zirconium, although that element is undoubtedly present. Fractionation shows that the oxalate precipitate (the portion soluble in ammonium oxalate) gives equivalents between 25.0 (the most insoluble portion of the double sulphate) and 44.7 (the most soluble portion); by far the major part of the element has the last-mentioned equivalent. The separation of this portion is now being carried out with large quantities of material; several hundredweight is being worked up.

Assuming that the element is a tetrad, which is probable from its behavior, it undoubtedly possesses an equivalent approaching the highest number (44.7), and for this there is a gap in the periodic table between cerium and thorium; one at least of the elements present (supposing that there is more than one present) will probably have an atomic weight of about 177, preceding tantalum (182.5) in the horizontal row of the periodic table.

I am at present engaged in mapping the spectrum of this new body or bodies.

As for the radio-activity, the mineral was bought in the hope that it would have a high content of radium. There is a trace of radium present, due, no

\* *Nature*.

of construction and nearing completion plants at St. Mary's, Trinity, Safe Harbor, Lemonine, Lance au Loupe, Cape Charles, Notre Dame Bay, and one in Labrador, all of which are operated under the same process. Up to 1892 the business of utilizing commercially the carcasses was carried on by an English syndicate, which employed a number of experts, but gave up the business after expending a capital of \$180,000. Every ounce of the whale is used in the manufacture of oil, stearin, bone meal or bones, and other articles of commerce which are shipped abroad. This new industry employs a capital of more than \$1,000,000 and furnishes employment to over 1,000 men, many of whom were forced to go elsewhere each season to obtain work.

**Discovery of a New Comet by Dr. Brooks.**

Dr. William R. Brooks, director of Smith Observatory, and professor of astronomy at Hobart College, discovered a new comet on the evening of April 16, in the constellation Hercules. Its position at discovery was right ascension 16 hours, 58 minutes, 10 seconds; declination north, 44 degrees, 10 minutes.

A second observation was secured on the evening of April 17, with a position of right ascension 16 hours, 55 minutes, 5 seconds; declination north, 44 degrees, 48 minutes. This gives a daily motion of three-quarters of a degree in a northwest direction. The comet is at present a fairly bright telescopic object with a short tail.

It is the first comet of 1904 and the twenty-fourth comet discovered by Prof. Brooks.




# THE "WOLVIN," THE LARGEST FRESH-WATER STEAMSHIP AFLOAT.

BY W. FRANK M'CLURE.


On April 9 the new steamer "Augustus B. Wolvin," the largest fresh-water vessel in the world, was launched at the yards of the American Shipbuilding Company at Lorain, O., harbor. Inasmuch as this vessel is 62 feet longer than the largest vessel ever before built for the Great Lakes, and embraced several important new features of construction, the launching was of unusual interest throughout the industrial world, and was witnessed by some 20,000 people. Men from the coast yards were present.

In dimensions, it is said that there are few strictly freight vessels upon the ocean that exceed the "Wolvin." She is 560 feet over all, 540 feet keel, 56 feet beam, and has a depth of 32 feet. She is built of steel, and in this connection it is a noteworthy fact that she is just twice the length of the first steel vessel built for the lakes, in the year 1887. About three years ago four vessels were launched from the yards at Lorain with a length of 498 feet, 52-foot beam and 30-foot depth. These were the "John W. Gates," "J. J. Hill," "Isaac L. Elwood," and the "Edenborn." The cost of the new steamer "Wolvin" is close to a half-million dollars. On account of the building of this boat, the drydock at Lorain was lengthened 60 feet, at a cost of \$10,000.


One of the most interesting features connected with the construction of the new vessel is the shape of the cargo hold, which is built in the form of a hopper, with sides that slope from the main deck to the tank top, and ends built on the same slope. The continuous length of this hopper, without divisions of any kind, is 409 feet. Its width at the top is 43

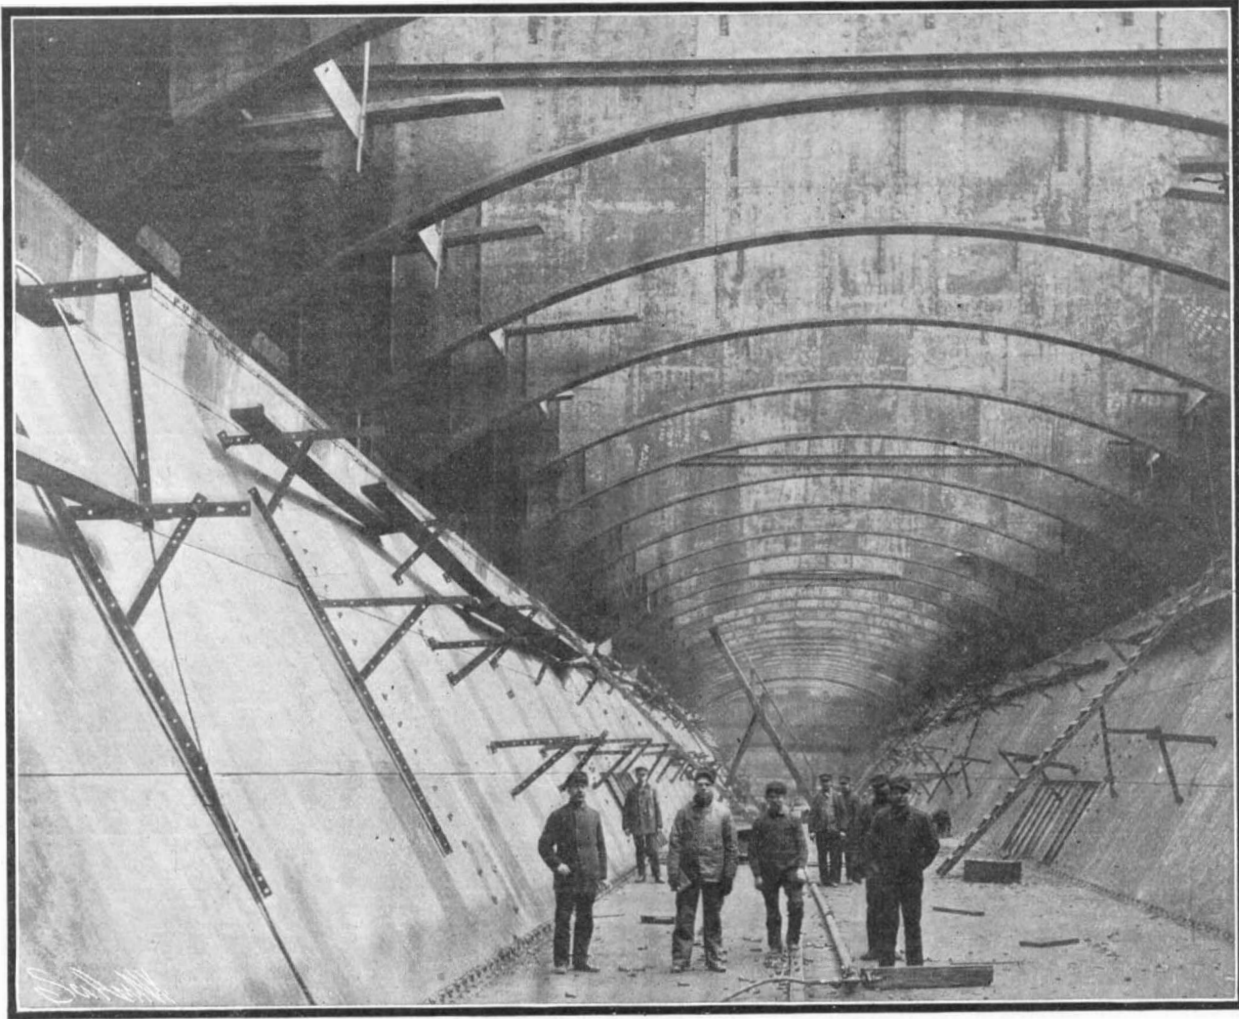

The Hopper Hold, Showing the Steel Arches Which Support the Upper Deck and Hold the Sides of the Hull to Form.

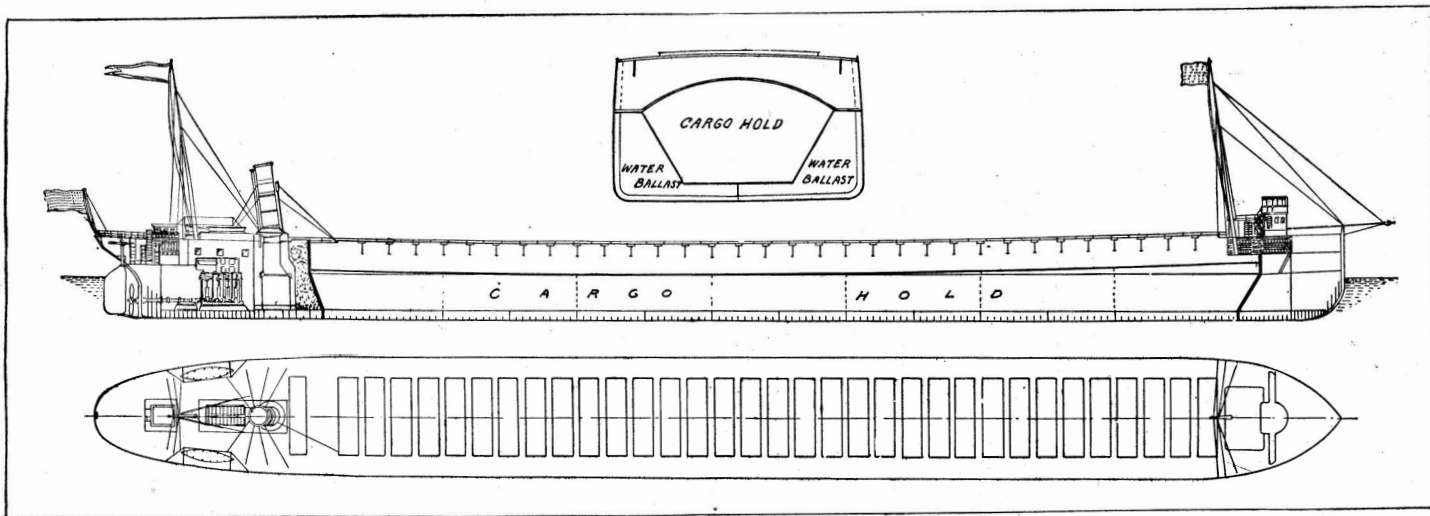

Transverse Section, Inboard Profile and Plan, Showing the One Great Hopper Hold, 409 Feet Long, with Its 33 Hatches.

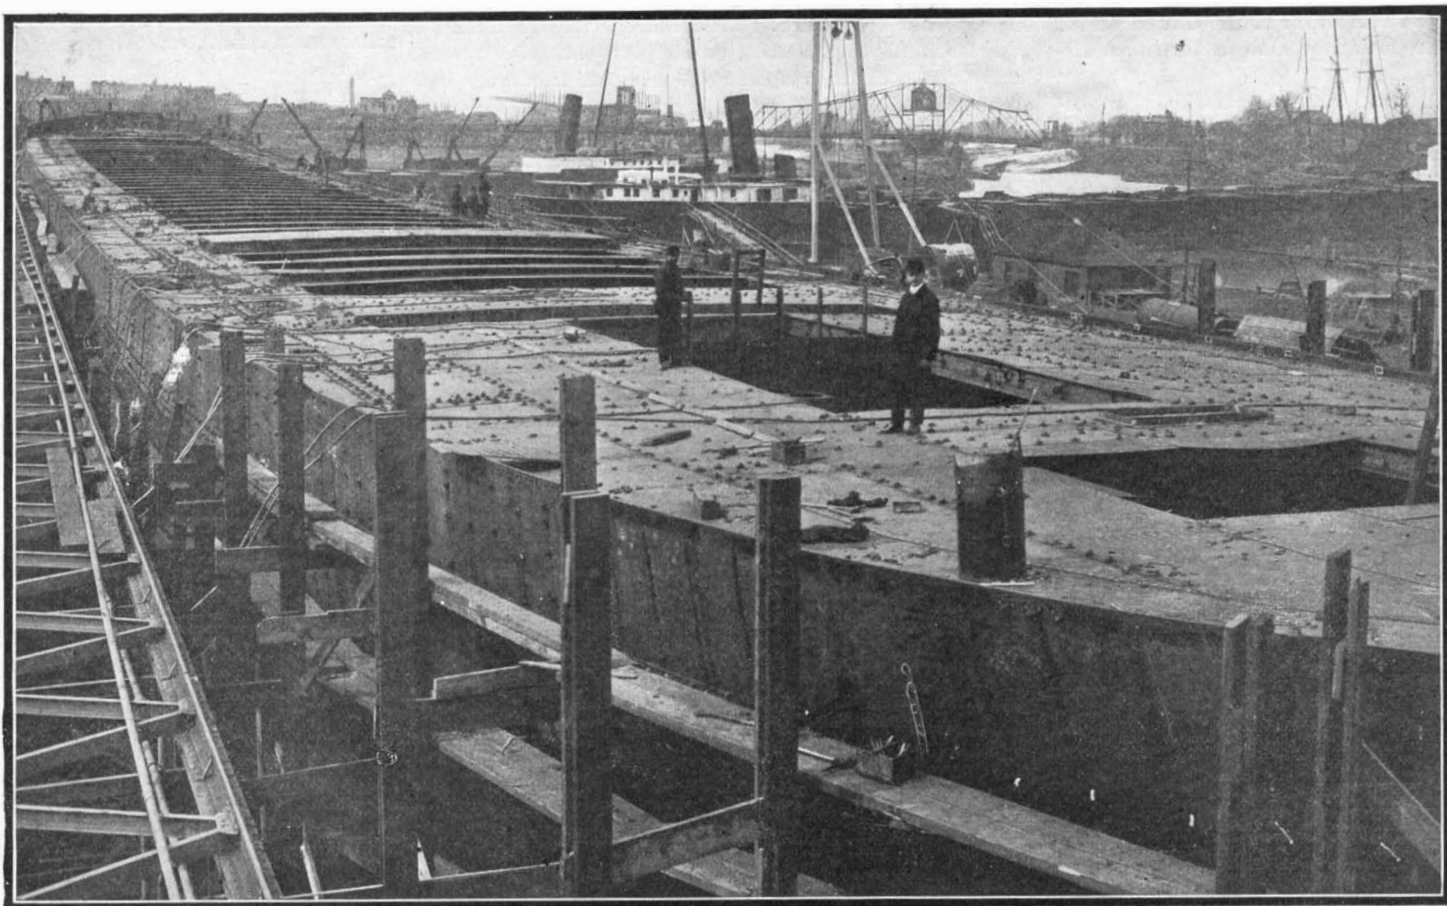

Length, 560 feet; Beam, 56 feet; Depth, 32 feet; Cargo capacity, 12,500 tons.

THE "WOLVIN," THE LARGEST FRESH-WATER SHIP IN THE WORLD.

feet and at the bottom 24 feet. This form of construction, it will at once be seen, will best accommodate the automatic "clamshell" unloading machines, by keeping the ore cargo at all times within the grasp of the giant scoop. This will therefore obviate the greatest difficulty heretofore experienced in operating these machines.

The space between the sides of the hopper and the sides of the vessel is used for water ballast, so that the latter, as well as being in the usual double bottom underneath the hopper, extends up the sides to the height that may be desired. The water-ballast space is divided into compartments by water-tight athwartship bulkheads at intervals of some 60 feet. The total water-ballast capacity is 8,000 tons of water. Instead of the ordinary hold stanchions, there is a system of girder arches which support the upper deck as well as the sides of the ship. More than 750,000 rivets were used in the construction of this vessel. In all, it contains 4,500 tons of steel.

There are thirty-three hatches with 12-foot centers. Each hatch measures 33 x 9 feet in the clear. The patent hatch covers are opened and closed by machinery. The only erections on the spar deck are the dining-room skylight aft, the coamings around the engine and boiler openings, and the pilot-house and texas forward. Steam has been used in every possible instance where manual labor could be saved. On the spar deck there are six 8-inch by 10-inch single-drum engines, each carrying a steel-wire mooring line. Then there is a steam windlass to be used for handling the two 8,000-pound anchors, while on the spar deck aft there is a steam capstan.

The cargo hold, heretofore described, has a capacity

of 12,500 tons of coal or 401,000 bushels of grain. The vessel is expected to carry from 10,000 to 11,000 tons of iron ore on an 18-foot draft. In her coal bunker, which is located in front of the boiler room, she will carry 350 tons of fuel. During the early part of May the "Wolvin" will take on a cargo of 12,500 tons of coal at Lorain for the head of the lakes, and will thereby break all cargo records of the Great Lakes. In order to accommodate this vessel at some of the lake ports, quite extensive harbor improvements would be necessary. It is probable that her lower lake destination this season will be at Conneaut, the "Carnegie port," where the giant automatic unloaders were first installed, and where they are found to-day in largest numbers.

Comfortable staterooms, social parlor, and dining-room for the owners of the "Wolvin" and their families are situated immediately under the pilothouse and texas. The officers' quarters are on the deck immediately below those of the owners. Alongside of the engine aft are the quarters of the engine-room officers. The kitchen, dining-room, and messroom for the crew are also in the after end of the ship.

The new vessel has quadruple-expansion engines, cylinders 18½, 28½, 43½, and 66 inches, and having a 42-inch stroke. All the propelling machinery is located in the after end of the vessel. There are two boilers, both of the Babcock & Wilcox type, using 250 pounds working pressure, and the steam is superheated. Mechanical stokers are used, which is in keeping with the policy that nothing that can be done by machinery shall be done by hand. The coal is first fed into hoppers, from which it passes on to traveling grates. The ashes are taken from a point at the rear of the boilers and thrown overboard by means of steam-driven elevators. The boilers are fitted with a system of induced draft.

The new freighter, aside from its size, will be striking in appearance among other vessels of the Great Lakes, in that it is painted yellow. The bodies of most lake freight vessels are black in color. The vessel is named for Mr. A. B. Wolvin, of Duluth, who was instrumental in having this great ship built.

#### The Commerce of the Siberian Railway.

The total distance from St. Petersburg to Port Arthur by the Russian Trans-Siberian Railway and the Russian lines in Manchuria is 5,913 miles, or practically twice the distance from New York to San Francisco. This is one of the numerous interesting facts about Russia and her railway and commercial systems presented in a monograph just issued by the Department of Commerce and Labor through its Bureau of Statistics, entitled "Commercial Russia in 1904." The publication, which occupies more than 100 large pages, discusses in detail present commercial and financial conditions in Russia and other subjects closely allied therewith. Area, population, railways, water transportation, methods of communication, agriculture, manufactures, commerce, and many other subjects of this character are among those discussed. Agricultural conditions, and especially Russia as a rival of the United States in wheat production; mining conditions, and especially Russia as a rival of the United States in mineral oil production; manufacturing conditions, and Russia as a possible competitor of the United States in the markets of the Orient for manufactures are discussed in detail.

Regarding the railways, which are a subject of especial interest at the present time, in view of present conditions in Russia and the Orient, the report says:

The importance of railways as means of communication is now greater than that of the rivers and other water routes, as is shown by accompanying tables. The building of the trunk lines, with the exception of the St. Petersburg-Warsaw-Vienna, built during the years 1845-1848 and 1853-1862, respectively, and the St. Petersburg-Moscow (Nicholas line), constructed between 1843 and 1851, dates back to the decade between 1860 and 1870. These years witnessed the construction of the entire group of railways, with Moscow as their common starting point, viz.: Moscow-Nijni-Novgorod (1861-62), Moscow-Voronezh (1862-1869), Moscow-Vologda (1862-1872), Moscow-Kharkov (1866-1869), with its branch to Kiev (1868-1870), and Moscow-Warsaw (1866-1871). Next in point of time comes the construction of roads connecting the black-soil region with its natural outlets, the ports of the Baltic and Black seas: Riga-Tsaritsyn (1861-1871), Kief-Konigsberg (1870-1873), Libau-Rommy (1871-1874), and Samara-Viasma (1866-1871), all of which lead to the Baltic. Simultaneously lines were built connecting each one of the more important southern seaports with the agricultural provinces. Chief among them are: The Odessa line, with its branch to Yelisavetgrad (1867-1869), and its Bessarabian branch (1871-1874), Kharkov-Nikolaiev (1869-1873), Kharkov-Taganrog (1869), Voronezh-Rostov (1861-1876), and, finally, Kharkov-Sevastopol (1869-1875).

The Russo-Turkish war of 1878-79 caused an almost entire suspension of railway building. It was only during the decade beginning with 1880 that activity in

this field was again resumed, but the character and method of construction of the newly-built roads changed abruptly. In place of the former trunk lines, connecting either the black-soil area with the seaboard of the Baltic, Azov, and Black seas, or with the central industrial region around Moscow, these years witnessed the construction of great strategic railroads, such as the Trans-Caspian, the Polessie system, besides roads primarily destined for the service of relatively small though important industrial regions (Catherine line, Ivangorod-Dombrovo). Moreover, the system of granting franchises (concessions) was superseded by the building and working of roads directly by and on account of the state. At the same time the redemption by the government of great railway systems was going on, so that for some time it seemed as if all private roads were going to be acquired by the state. Although of late greater latitude has been given to private initiative, by for the greater part of Russian railways is in the hands of the government. Out of 36,673 miles under the control of the ministry of communication on January 1, 1904, 24,436 are worked by the state, and 12,237 miles only by private companies.

The adverse years, 1891 and 1892, gave a new impetus to railways. "In order to give employment to the starving peasantry" the government undertook and encouraged the construction of new roads. A new era of railway building began with these years, which, in its vigor, soon surpassed anything seen not only in Russia itself but anywhere else in Europe. Thus, while during the above years the number of versts opened for traffic was but 123 and 419 respectively, the succeeding years mark the beginning of an exceedingly energetic expansion of the railway system, whose termination does not seem to be at hand even in the near future. According to official figures there were opened for traffic during:

| Year.      | Miles. |
|------------|--------|
| 1893 ..... | 1,043  |
| 1894 ..... | 1,147  |
| 1895 ..... | 1,277  |
| 1896 ..... | 1,953  |
| 1897 ..... | 1,190  |
| 1898 ..... | 1,897  |
| 1899 ..... | 3,297  |
| 1900 ..... | 1,647  |
| 1901 ..... | 2,235  |

These figures include roads built not only by the state, which has its hands full with the construction of the grand trans-Siberian railway, but also by corporations whose activity now almost surpasses that of the early years of the decade beginning with 1870, the first period of great railway construction, when the building of roads, for some time at least, became the monopoly of a few private companies. At present franchises are eagerly contested by competing corporations, a fact unheard of until recently in Russia, where the state, not so very long ago, had yet to guarantee the interest on the stock and bonds of the chief railroad corporations. The ministries of finance and transportation have, during the latest years, been literally swamped with petitions coming not only from railroad and construction companies, but also from representatives of "local interests," as mining, manufacturing, and agricultural groups. The length of Russian railways in Europe alone has thus considerably increased during the last ten years, and surpasses now that of France and Great Britain, respectively, being inferior only to that of Germany.

Simultaneously with the redemption of the greater part of Russian railways the government undertook the difficult task of regulating the railway tariffs for both passengers and goods. The principles adopted were those of the "zone" tariff, and the results of the innovation have been very encouraging, for both passenger and freight traffic have increased considerably since the introduction of the new tariffs.

The present state of the Russian railways, according to the recently published returns of the ministry of communications, is stated as follows: At the beginning of 1902 the total length of all Russian railways (exclusive of railways in Finland) was 35,187 miles, of which 28,982 miles were in European Russia, 5,138 represented the length of railways in Asia (exclusive of the Manchurian Railway), and 1,067 were secondary railways of local character. Of this total of over 35,187 miles, 23,557 miles, or over 67 per cent, were owned and operated by the government. The value of this system, exclusive of the local secondary roads, is given as 5,149,399,000 rubles, or about 99,000 rubles per verst. Of this grand total expended in the construction of railways the government's share is 4,914,805,000 rubles, or about 95 per cent. This amount includes the value of all corporate securities, both stocks and bonds, the income from which was guaranteed by the government, those of the bonds amounting to 2,920,428,000 rubles, which are held by the treasury, and the total amount of subsidies granted for the construction of railways.

For January 1, 1904, the length of the entire Russian railway system, exclusive of 1,944 miles of railroad in Finland and 1,555 miles of the eastern Chinese road, is officially stated as 36,673 miles. Of this total, 31,493

miles were in Europe and 5,180 miles in Asia. Of the European railways, the government operates 19,256 miles, while 10,954 miles of railway of general interest and 1,312 miles of railways of local interest were operated by private corporations. The total length of double-track roads was 6,830 miles. The length of miles opened for operation during the year 1903 was 446 miles. The total number of miles under construction was 3,931.

For the five years 1897-1901 the net earnings per mile of the American railways and railways in European Russia compare as follows:

|               | American railways. | Russian railways in Europe. |
|---------------|--------------------|-----------------------------|
| 1897 .....    | \$2,016            | \$1,789                     |
| 1898 .....    | 2,325              | 1,778                       |
| 1899 .....    | 2,435              | 1,705                       |
| 1900 .....    | 2,262              | 1,664                       |
| 1901 .....    | 2,854              | 1,493                       |
| Average ..... | \$2,378            | \$1,686                     |

It is seen that the net average per mile earnings of the American railways for the period in question are over 40 per cent higher than those of the Russian railways. Still more unfavorable comparisons might be drawn if the financial accounts of the Russian railways were set side by side with the same accounts of European railways having a much larger density of traffic than the United States railways.

#### Engineering Notes.

An immense scheme of additional irrigation for the Punjab, costing 6½ crores of rupees, is being prepared, and in order to keep pace with what is being done, the government of India has sanctioned a second chief engineer for irrigation for that province.

A new type of automatic loom has been devised by two Burnley operatives. In this device all the features of the existing Lancashire loom are retained, and by the introduction of a hopper containing weft in steel tubes and some simple mechanism on the slay, an automatic loom is produced. When the weft thread breaks, the weft fork sets in motion mechanism which forces the old weft tube out of the shuttle at the top, a full tube immediately taking its place at the bottom.

Pulverized coal for combustion under steam boilers was the subject of a paper read at a recent meeting of the Western Society of Engineers, Chicago, by Mr. John M. Sweeney. According to the results of comparative trials cited by him, 9.4 pounds of water, equivalent evaporation from and at 212 deg. Fahr., were realized per pound of fuel with the pulverized coal and 7.5 pounds per pound of fuel with hand firing. On the basis of combustibility the equivalent evaporation in the two cases was 10.47 and 8.4 pounds, respectively.

A record railroad run is to be inaugurated by the London and South-Western Railroad of England in connection with the recent decision of the American Steamship Line to make Plymouth instead of Southampton the port of call in their transatlantic traffic. The boat train of this company is to convey the passengers direct from Plymouth to London without a single scheduled stoppage, a total distance of 230¼ miles, in 270 minutes. This will represent an average speed of 51.27 miles per hour, which considering the difficult nature of the track will be a commendable performance. Furthermore, it will constitute the longest railroad run without a stop in the world.

The famous Morris Canal in New Jersey is practically condemned in a report just rendered to Governor Murphy by ex-Governors Werts, Griggs, and Voorhees. The canal company was incorporated in 1824 and built this waterway soon afterward, from Phillipsburg on the Delaware River to Jersey City, a distance of 106 miles. A number of reservoirs were constructed, some of which are now summer resorts and surrounded by valuable estates. The State has a right to take the canal in 1974. It was leased in 1871 to the Lehigh Valley Railroad Company, which has since operated it. The eminent commissioners report that even were the property in perfect condition, it could not be operated at a profit. The decline in its value has been due to the construction of railways which became powerful competitors, carrying freight at cheaper rates than is possible with the canal boats except at a loss. Eventually all traffic was diverted from it except the trifling amount from the lessee. At the present time it stands in the way of needed public improvements, but its abandonment involves the untangling of a complication of interests, including the stockholders of the canal company, the lessee railroad company, the State, the municipalities along the route, the landholders about the reservoirs, and the people having contracts for important water rights, not to mention a lot of trifling claimants for consideration. While the abandonment is assured, it now appears that it will involve more trouble and delay than the original construction of this canal, once the pride of northern New Jersey.—Engineering Record.



## Correspondence.

## Prevention of Premature Firing of Big Guns.

TO THE EDITOR OF THE SCIENTIFIC AMERICAN:

Referring to the gun explosion on the battleship "Missouri" on the 13th instant, will inquire if it would not be a simple mechanical problem to design a device which would make it impossible to fire one of these guns until the breech was closed, similar in principle to the safety attachment on the handle of a Smith & Wesson pistol, which prevents the trigger being pulled until the palm of the hand grasps the handle?

GEORGE BRECK.

San Francisco, Cal., April 15, 1904.

[The latest types of guns are provided with a safety device for the purpose of preventing premature firing. The gun is fired by closing an electrical circuit, and the contacts are not in a condition to close until the breechblock is entirely screwed home.—E.D.]

## The Blondlot, or N-Rays.

In this laboratory we have obtained uniformly negative results in experiments on the Blondlot rays. Our experiments were made with the help of seven observers, including five doctors, one student, and one laboratory attendant. Calcium sulphide screens rendered fluorescent in a separate room by burning magnesium were employed. They were brought into an absolutely dark room in which the observers had been kept for some time. Two forms of screens were used:

(1) Flat screens on which a circular area on a slip of glass is covered by calcium sulphide.

(2) The later form in which a circular area at the back of the hemispherical lens is covered by calcium sulphide.

The screens were either held by the hands of the observers or were clipped on stands.

The observers were told first to look steadily at the screens and report any variation in brightness, calling out "bright," "dimmer," "dim," "brighter," etc., as the appearances seemed to change. Even with the screens on the slips of glass the observers after a few moments were able to call out the changes, *although there was no attempt at muscular contraction*. With the lens form of screen the changes in brightness were very marked.

We next attempted to find whether muscular contraction behind the screen caused an increase of brightness. Of course, where the observer sees a change in brightness without muscular contraction it is easy to be misled on this point. We made the observer continue to call out the degree of brightness, and we contracted the muscles of the arm behind the screens sometimes after he had called out "bright" and sometimes after he had called out "dim." In the great majority of cases the effect we looked for did not follow. In the few cases in which it occurred we naturally attributed the results to the changes in brightness which can be observed without any muscular contraction.

We next told our observers to look, as it were, into the distance beyond the bright spot, and to report on the brightness of the screens. When the accommodation of the eyes for the near vision was relaxed they reported without exception that the brightness of the screens was constant, and that muscular contraction made no difference.

When observers were then asked to touch the backs of the screens, thus warming them, they reported an increase of brightness.

It is not easy to explain the phenomena we have described. We believe that there is difficulty in accommodating for the fluorescent circle, and that there is a wavering movement of the ciliary muscles, and probably also a wavering in the size of the pupils. Yet it is asserted that we can focus a point of light in a dark room, and it is difficult to see why the fluorescent screen cannot also be kept steadily in focus when it consists of a flat glass slip with fluorescent circle. In the case of the later, and presumably more successful form of apparatus, the difficulty is easily understood. In that form the fluorescent rays proceed from the back of a hemispherical lens, that is, from a point within the posterior principal focus, and they are widely divergent and thus strain the accommodation of all but near-sighted people. The fact that in every instance we found that the light becomes steady after relaxation of the accommodation is very striking.

But the phenomena observed by us do not go any distance toward explaining the results described in M. Blondlot's papers. How is it that he and many of his compatriots see increase of brightness under conditions in which we see none? Is the explanation to be found in the paper by Heinrich, "Die Aufmerksamkeit und die Funktion der Sinnesorgane" (Zeitschr. für Psychologie u. Physiol. d. Sinnesorg., vols. ix. and xi.), in conjunction with our observations? Heinrich found after many careful experiments that the pupil dilates when attention is directed to an object situated in the field of indirect vision, and that it dilates still more during a short mental effort, such as a calculation. He

found also that on directing attention to an object in the field of indirect vision the ciliary muscle relaxes, thus diminishing the curvature of the crystalline lens, and that during mental calculation this change is very marked, causing a curvature even less than that required for vision of a remote object. He found also that under the same conditions the axes of vision tend to become parallel or even divergent.

Can it be that the mental condition of some observers in a state of expectancy reacts on the intrinsic muscles of their eyes, and thus they see what they think they should see?

We have also experimented with the rays from a Nernst lamp, but without result.—Physiological Laboratory, the University, Glasgow, March 29. John G. McKendrick, Walter Colquhoun, in Nature.

## TWO HOME MADE WIRELESS TELEGRAPH RECEIVERS.

Wireless telegraph receivers or "kumascopes," to adopt the name given them by Prof. Fleming, nearly all depend upon the principle of an imperfect contact in a local circuit being made better by oscillations generated by the Hertzian waves. Most of these kumascopes have an exceedingly simple form and can be constructed by any amateur. One of the simplest is that

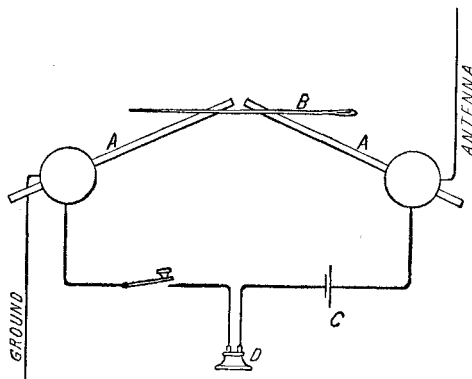


Fig. 1.

shown in Fig. 1, which only requires two binding posts, two pieces of No. 12 aluminium wire, and a large sewing needle. The wires A are supported at an angle with each other, as shown in the diagram, and across them lies the needle B. The kumascopes is connected up in the usual way to a telephone receiver D and a local battery C. Care should be taken to make the battery sufficiently weak, for this is a very common cause of failure. A battery of suitable power can be made by filling a half-pint fruit jar half full of water and dissolving in the water a heaping teaspoonful of common salt. An electric-light carbon and an ordinary battery zinc rod may then be used for the electrodes. The kumascopes may be used in connection with transmitting apparatus, such as that described in the SCIENTIFIC AMERICAN of September 14, 1901. The Hertzian waves sent out by the transmitter will be detected by the usual bubbling or buzzing noise in the telephone. In our diagram we have shown one of the binding posts connected with the ground, and the other to the antenna. This is necessary only where considerable distances are to be covered, but may be dispensed with where the transmitter and receiver are both located in the same room or building. The imperfect contact in this kumascopes is due to the thin film of oxide which always covers the surface




Fig. 2.

of aluminium. The film is sufficiently thick to normally prevent the passage of the low-power current of the local circuit, but its conductivity is readily increased by the peculiar action of the electric surges or oscillations set up in the aluminium wires by the Hertzian waves. The resistance of the oxide, however, is immediately restored when the oscillations cease, and the buzzing sound in the telephone is therefore due to the rapid variations in the battery current.

Another kumascopes which will be found just as easy to make, and which gives equally good results, consists of two strips of copper or tin secured to a board, as shown, and having notches cut in their adjacent ends to form a seat for a carbon ball. The ball may be carved out of an electric light carbon and rounded off smoothly with a file. Connections with a telephone and local battery are made, similar to those described above. The imperfect contact between the carbon ball and the copper strips normally offers a great resistance to the current in the local circuit which is greatly lessened by the electric oscillations. It will be observed that both of these kumascopes are self-restoring, that is, they require no tapper or other mechanical device to effect decoherence.

## Electrical Notes.

Some interesting experiments have been carried out in Milan with an electric street railroad car equipped with a single-phase alternate-current motor of the series laminated field type. This motor is the device of Dr. Finzi, and is designed for a frequency of 18 periods per second. The motor weighs 16 hundred-weight. In this apparatus the ordinary series parallel controller is replaced by a transformer giving respective voltages of 80, 100, 120, or 140 volts as desired, when supplied with a current at 500 volts in its primary. The commutation proved highly satisfactory at starting loads, and under full voltage sparking was no greater than is the case with a good continuous-current motor. The commutator and brushes were examined after a run of 125 miles, and were found to be clean, and showed no signs of appreciable wear. The starting acceleration was not quite as good as that of a continuous-current motor, but was maintained constant longer, so that a car speed of 16 miles per hour was reached in the same time by both, the energy taken being 14.85 watt-hours per ton in the case of the continuous-current motor, as compared with 10.6 watt-hours per ton in that of the alternator.

The Kelvin Compass.—In the marine world the Thomson compass still holds its own, and its users apparently have not even yet got used to the change in name from Sir William Thomson to Lord Kelvin. We notice, however, that the most recent patent compass issued by Messrs. Kelvin and James White, Limited, bears the name of Lord Kelvin. The feature in connection with the design of this which calls for special attention is the improvement in the means of suspension, in order to secure a steady card in spite of the greater vibration due to higher speed in steamships. Another feature is the illumination of the compass at night entirely from the underside. This can be done either with electric light or by means of oil lamps. In either case adjustment in the intensity of the light is provided, as this has been found particularly useful when taking bearings from stars or other faint lights. A new form of helmet is now introduced having rifle sights upon the top. This helmet moves round freely in any direction, and bearings of the sun, lights, buoys, or other objects are taken instantaneously and read directly upon the compass card. Bearings by azimuth mirror in the usual way can also be taken by day or night without removing the helmet. These facilities for taking bearings smartly and conveniently are being greatly appreciated by shipmasters and navigating officers.

M. Routin, of Lyons, has devised an electro-mechanical governor which is described in a recent article by M. F. Brock in the *Elektrotechnische Zeitschrift*. The device consists of a solenoid, magnetized by a few series turns and a coil which is in shunt with the generator. The magneto-motive forces of the two windings are opposed, that of the shunt coil, however, predominating under normal conditions. The field switch, the valve mechanism and a rheostat in series with the shunt coil of the solenoid are mechanically connected to the armature of the solenoid. The last-named switch performs the function of securing the predominance of the shunt coil of the solenoid for any position of the latter's armature. Assuming additional load to be put on the generator, the armature of the solenoid will drop a certain distance, because the increased magnetomotive force of the series winding of the solenoid will, by more nearly balancing that of the shunt coil, diminish the strength of the electromagnet. In falling, the armature will have acted upon the valve gear, at the same time cutting out resistance from the field circuit of the generator as well as from the circuit of the shunt coil of the solenoid. If load is taken off, the action is reversed and the armature is drawn higher up into the solenoid, and if a short circuit takes place the series coil largely predominates, the armature is drawn right up and steam is shut off. If the fuse blows in the generator circuit, the same thing occurs, the shunt coil now being responsible for this.

## The Current Supplement.

The article begun by Frank C. Perkins, in the last number of the SUPPLEMENT on the "Development of the Electric Mining Locomotive," is concluded. Some well-known foreign and American locomotives are described and illustrated. "Electrolytic Rectifiers for Charging Storage Batteries," is the title of a very instructive paper. Dr. G. Erlwein begins an admirable discussion of the "Purification of Potable Water by Means of Ozone." Mr. Hiram Percy Maxim's very thorough study of the cost of operating automobiles for commercial purposes is concluded. Assistant Naval Constructor Gleason writes instructively on the steam turbine. Mr. Charles H. Stevenson has much that is of value to write on the menhaden industry. How an automobile can be run on a railway track is a subject that is well illustrated in the current SUPPLEMENT, No. 1478. The usual electrical, engineering, and consular notes will be found in their accustomed places.

## THE MANUFACTURE OF INCISED, OR CUT GLASS.



GLASS is a singularly versatile material, at once refractory and yielding, yet lending itself to use in thousands of ways. It is as a means of artistic expression that it is chiefly interesting, for its utility is beyond


all question. The iridescent chatoyant colors of antique glass—Nature's destructive action—do not distract us from the charm of perfect form. Venetian glass, the beautiful product of the lagoon-island of Murano, is so very impracticably fragile, that even its possession is a care. Probably glass would have remained in a rather humble position, if it had not been that a Bohemian glass-worker more than two hundred years ago conceived the idea of a new invention, which was destined to change the glass product of the world. He thought of making the heavy "flint" or "lead" glass larger as regards the dimensions of the walls of the article, in order that he might have more stock to work on, so that he could deeply incise, or cut the glass to form patterns, the sides of the rough cut being in turn polished to give the effect of a many-faceted jewel. The success of the new *objet d'art* was not immediate, and it was only when the crude designs and imperfect workmanship of the earlier cutters gave way to the labors of highly-skilled artisans directed by talented designers that




Blowing a Glass Blank

cut glass, or "art glass," as we might term it, took the place to which its great beauty entitles it. It is to America that we must look for the perfection, and the superiority of design and skillful workmanship of this branch of the industry. There is no such thing as absolute interchangeability in the glass-cutting establishment, and the artistic bent of the various cutters is encouraged. For purposes of illustration of this interesting industry, we have selected the plant of the Libbey Glass Company, of Toledo, Ohio, as being the best exponent of this really American industry.


Glass is a peculiar product, having as a base silica, which is fused with alkalis and metallic oxides to form a hard transparent substance which we all know as "glass." It can be wrought in various ways, and is susceptible of a high, and, when properly cut, a lasting finish. There are a number of varieties of glass, composed of varying ingredients, but we need only concern ourselves with lead glass, used for decoration by incision, or the cutting away of portions of the reinforced wall so as to form an ornate pattern. The raw materials consist of a sand, so called, of exceptional quality as regards sharpness and color. It is not a sand in the ordinary sense of the word, but is a quarried rock which has been crushed. This accounts for the uniformity of its color, which is so necessary in producing a steely-blue white glass, which is to be used for giving the prismatic colors caused by the cutting process. The red lead, saltpeter, and sodium carbonate are accurately mixed with the sand, and a small percentage of white arsenic or manganese is added to bleach or clarify it. The proportion is varied ac-

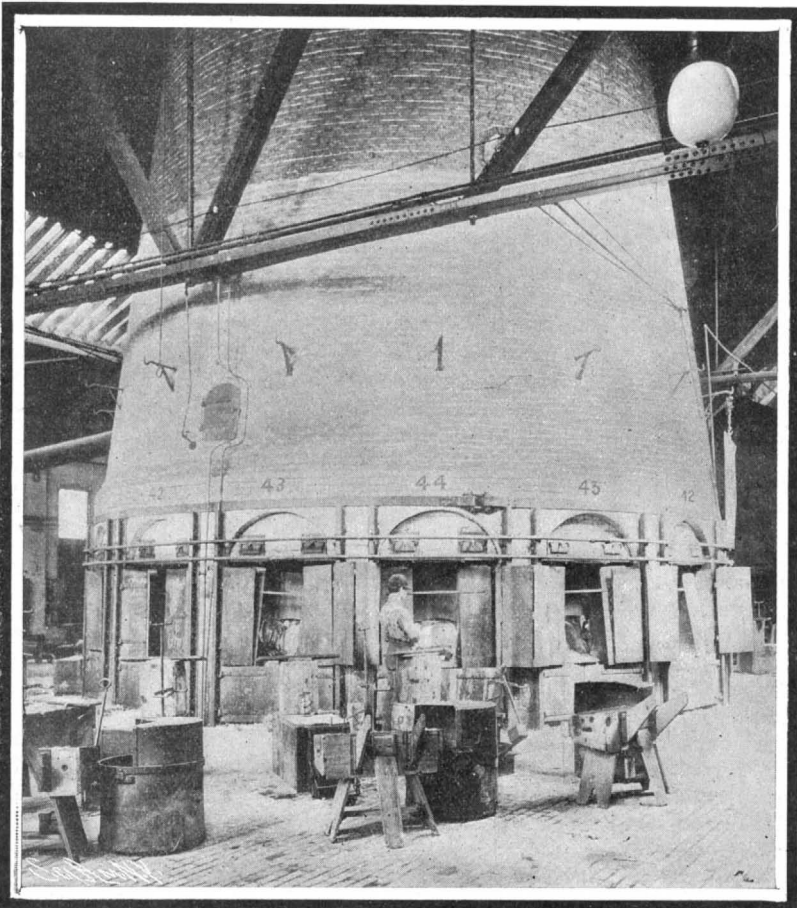


A Glass Furnace.

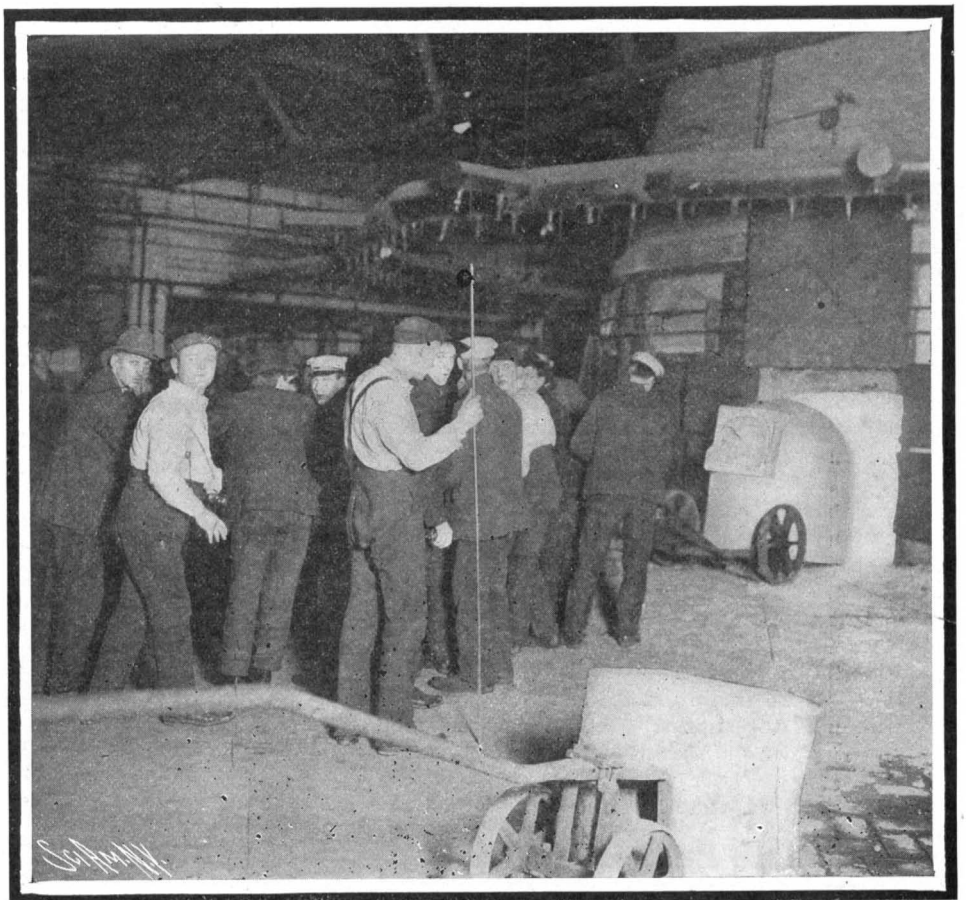

Setting a White-Hot Melting Pot.

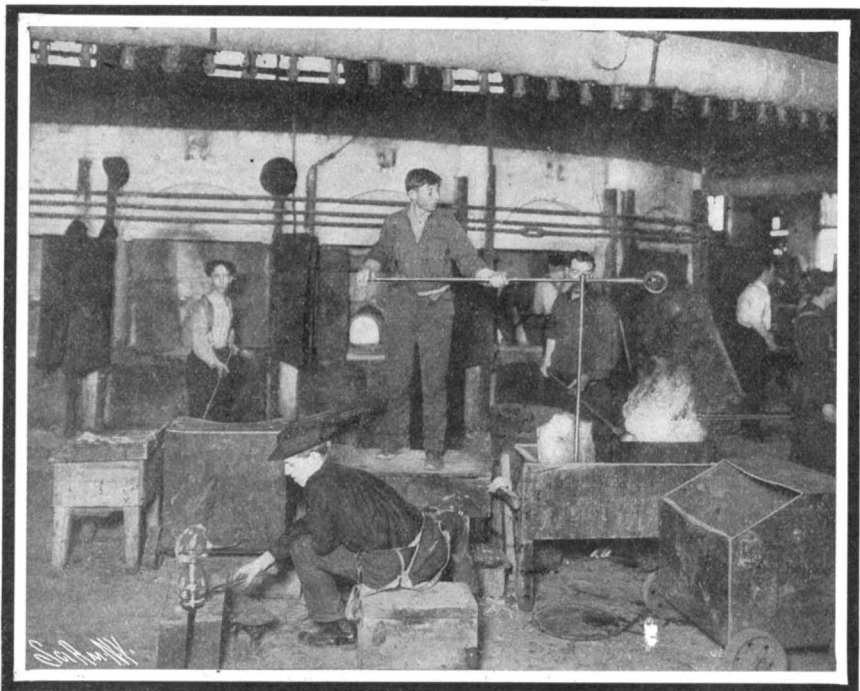

Blowing Glass Articles.

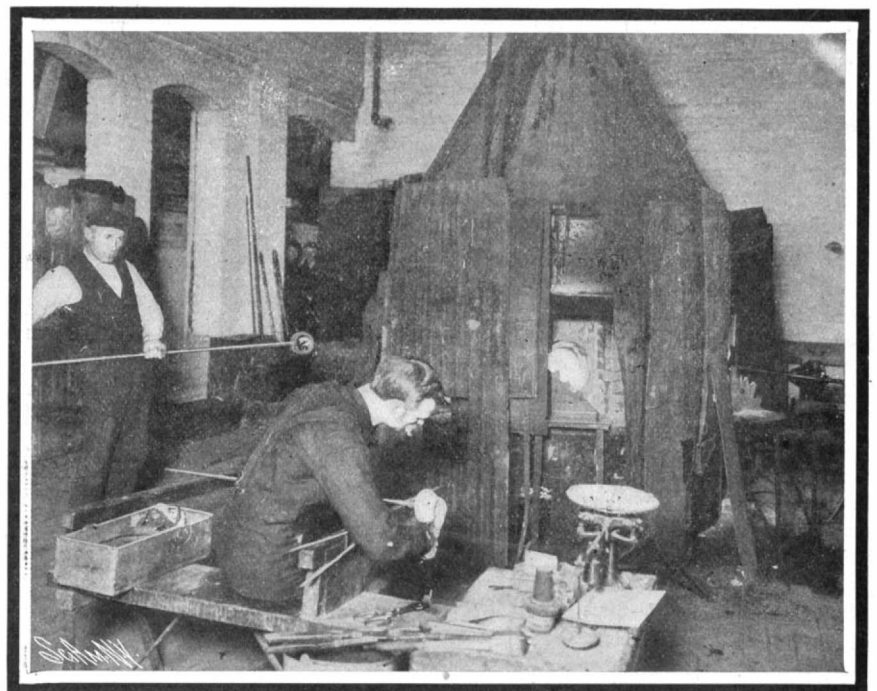

Forming a Glass Article.


## THE MANUFACTURE OF INCISED, OR CUT GLASS.




according to the nature of the finished product. A glass furnace is a large round or oval fire-brick oven, capable of holding an aggregation of melting pots, which rest on a floor in common under a dome called a crown. These pots are made of unbaked fire-clay. A mouth gives entrance for the raw material and the workmen's blowpipes, to which the molten glass adheres. A furnace may contain as many as sixteen pots arranged radially on the floor of the furnace. They are heated before setting, and are subsequently filled with about 1,600 pounds of raw material, which soon melts at a temperature of 2,500 deg. F., caused by the intense flame of gas and air, which is deflected from the dome downward, the products of combustion passing out through a stack.

The glass gatherer receives his order for a specified size and shape for his article; and after obtaining a sample to guide his memory, takes his iron blowing-tube, and collecting sufficient of the molten glass from the pot in the furnace, rolls it to and fro on a metal plate to produce a uniformity of distribution of the mass, which is then reheated in a furnace called a "glory-hole." He then turns it over to a glass blower, who takes the pipe and blows the article to approximately its final shape. It is then reheated and given definite form and finish by the most expert workman of all three. The tender glass must now be annealed or tempered to equalize the strains, otherwise the piece would break. It is then placed in kilns or tempering ovens, where it is first reheated and then gradually cooled.

The heavy uncut articles are then ready for the cutting operation, by which they lose considerable weight. In some cases the loss is one-third. The cutting operation really consists of three stages. The article is first roughed with sand and a steel grinding wheel. It is then smoothed by a stone cutting wheel, and is lastly finished by a wooden polishing wheel. A workman holds the article against the conical edge of a steel wheel secured to a shaft driven by belts and

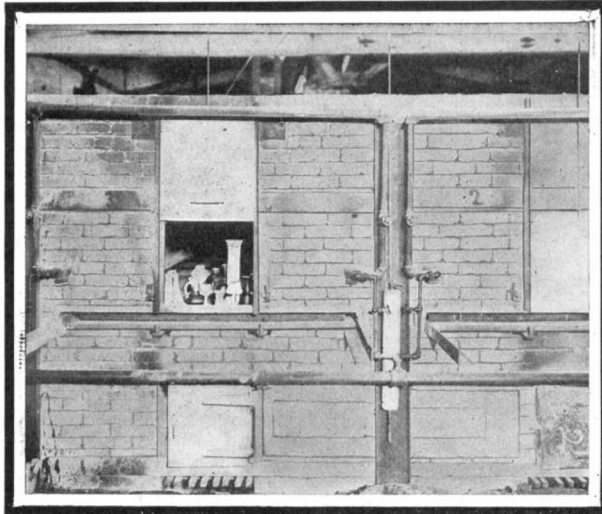


The Tempering Furnace.

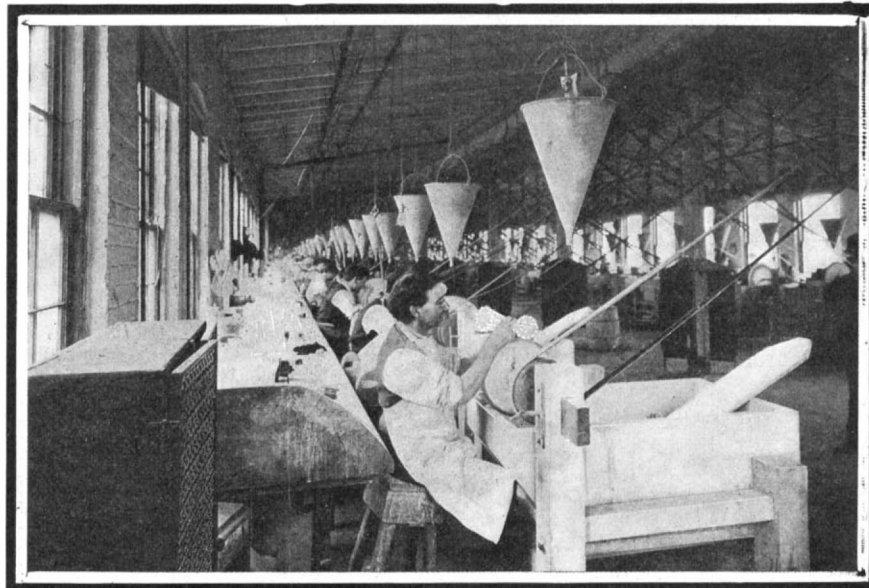


Polishing the Cut Glass.

pulleys. Fine sharp clean sand and water are allowed to drip on the wheel from a cone-shaped bucket. The article is pressed against the rapidly-rotating wheel, and is deeply scored or cut. The heaviest and principal lines in the pattern are roughed-in by these steel wheels and the sand. In order that all articles may stand level, the bottoms are ground on a horizontal grinding wheel, sand and water still being used. The roughed article is now ready for the wet smoothing stones, which resemble steel wheels both as to size and edge, but no sand is used; these wheels follow the cuts that the steel wheels have made, and also cut in the finer lines of the pattern. The practically finished piece is now ready for the polisher, whose rouge-charged wheels are of wood, their size and edge being the same as those of the steel and stone wheels, and therefore adapted to follow every line with almost mathematical accuracy. We have now the finished piece, which may grace a table or which may adorn the buffet of the White House. While cut glass is made abroad, the examples lack shape and depth and uniformity of cut. For this reason American cut glass forms an object of export, and the examples of art in this glass which will be exhibited at the St. Louis Exposition will be a revelation to most visitors.

The Romans and the Orientals were fond of both the cameo and the intaglio processes of engraving, and they had a peculiar combination of both which we now designate as "rock-crystal engraving." This is a long and expensive process, but the superb and highly artistic results fully warrant the expenditure of labor. The somewhat formal and mathematical lines give way to floriated designs, or free rein is given to the plastic fancy by the possibility if not the ease of modeling. The sculptor in his studio adds clay while he is working at his bust or group, while his marble-worker cuts off the marble to attain the same effect, in one case addition and in the other subtraction—the glass engraver does both. This


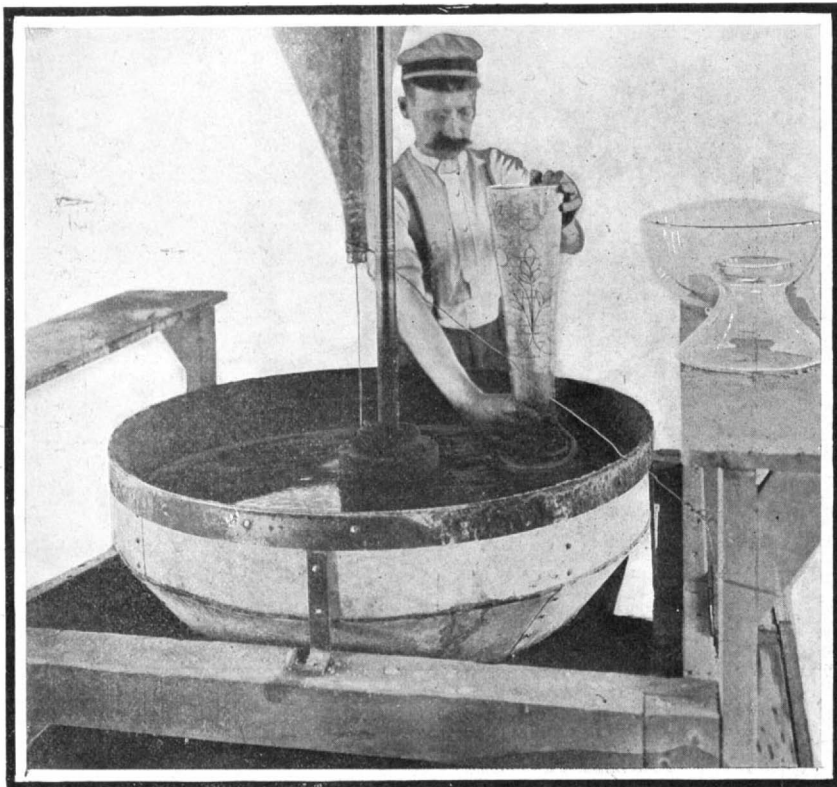


Grinding the Foot of a Vase.

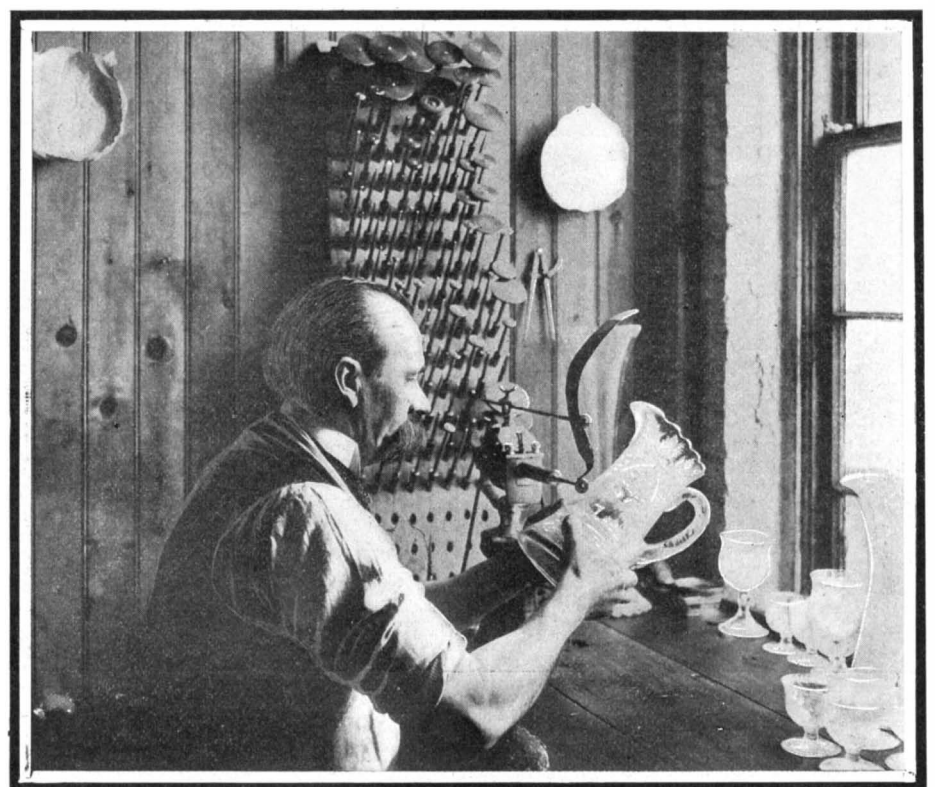


Engraving Glass.

Design Roughed in      Design Polished.

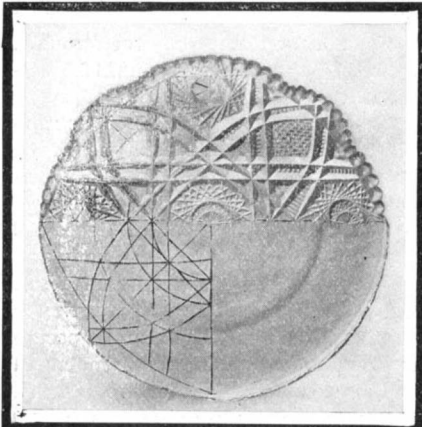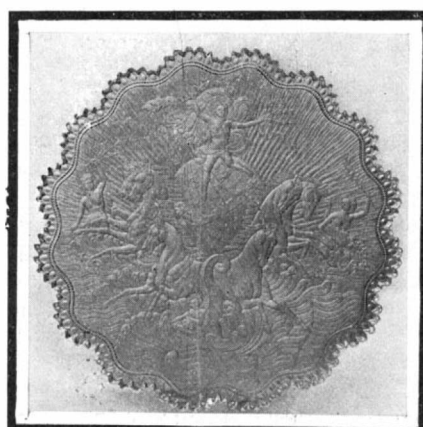The Pattern.      The Blank.  
A Cut Glass Plate.

An Engraved Plate.

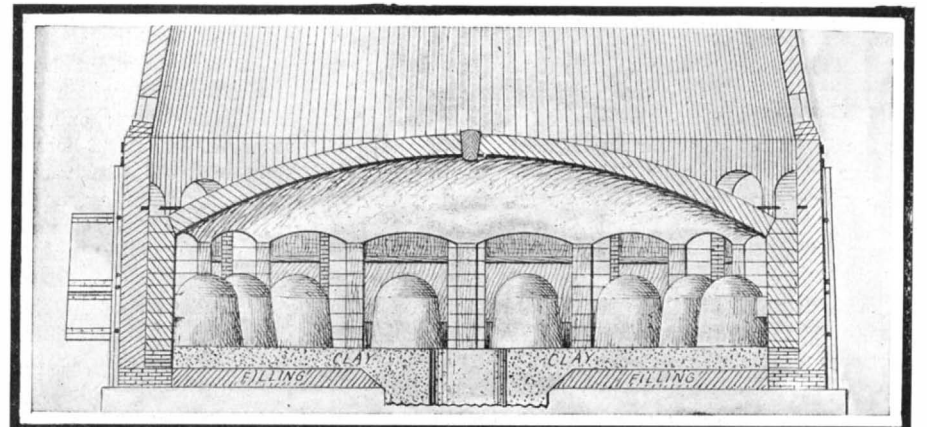

A Glass Furnace, Showing Melting Pots.

## THE MANUFACTURE OF INCISED, OR CUT GLASS.

style of glass art work is also carried on by the Libbey Glass Company. The engravers use copper disks of various diameters and thicknesses. The steel spindles carrying the disks are secured to a rapidly-rotating polishing head, the copper being charged with olive oil and emery powder. The tools are changed as often as necessary to obtain the desired effect. Both smooth and matt surfaces may be produced, or delightful combinations can be made of them. The cut glass industry certainly has a bright future in this country.

#### THE AUTOMOBILE AND MOTOR-BOAT RACES AT NICE AND MONTE CARLO.

BY THE SCIENTIFIC AMERICAN'S SPECIAL CORRESPONDENT.

Interest in the annual automobile speed trials at Nice was increased this year because of the motor-boat races in the Bay of Monaco, which were run off a few days later in connection with an exhibition of this new type of speedy craft.


The automobile speed trials were held on the first day of April, and were carried out without accident and with a considerable lowering of existing records. These trials took place on an extension of the Promenade des Anglais, and the road, while not so straight

going at a 95-mile-an-hour gait in an open automobile are graphically portrayed by Rigolly in the following words: "I felt I was traveling very fast—faster than at Ostend; but I was quite unable to judge the pace. I saw nothing of the road but a white ribbon which I did my best to follow in the middle. The only real sensation of my speed was the impression that my head was coming off—was being torn backward by a furious wind. I was in great need of a support, such as photographers employ." Asked if he could have maintained such speed for half an hour, he replied that the strain on his eyes and neck was so great that he did not believe anyone could keep up such a pace for 20 kilometers. Despite the fact that the machines, throwing up clouds of dust, all traversed this curving "ribbon" of road, whose surface had numerous small holes and hummocks, and which was lined on both sides with sightseers, not a single accident marred the events of the day.

These began with the mile speed trials from a standing start, which were opened at about 2:30 P. M., by a motor bicycle. Tamagni, on an Italian, 5-horse-power, twin-cylinder Marchand machine, won in 1 minute, 7 2-5 seconds, averaging a speed of 53½ miles

motors only, and by machines of any motive power, respectively. The weight of the machines in both instances must not exceed 1,000 kilogrammes (2,204.6 pounds). A distance of 600 meters (656.4 yards) was allowed in which to get up speed for these flying kilometer trials. The one for the second Rothschild cup was won by Rigolly in 24 seconds, with Duray second in 26 3-5 seconds, and Mark Mahew third in 28 3-5 seconds. Three out of the four 80-horse-power Mercedes cars finished next in 29 2-5 seconds, the fourth covering the 6-10 of a mile in only 2-5 of a second longer time. Although the Mercedes cars were beaten, they nevertheless showed their great uniformity by making such an even performance.


It was in the trials for the third Rothschild cup that Rigolly broke all records. Mark Mahew, on his Napier, flashed by first at 82.24 miles an hour. His time for the kilometer was 27 1-5 seconds. Hardly had the roar of his machine died away when sounds like those of a rapid-fire gun of large caliber were heard in the distance. One had barely time to guess what machine it was, when a huge racer with boat-shaped prow flashed by and was hid in a cloud of dust. The car jumped and bounded on the rather

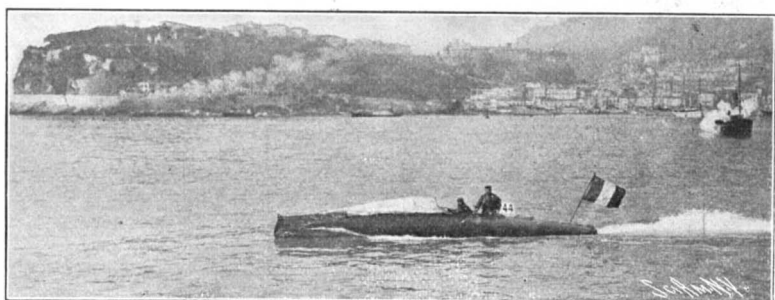

The "Trefle-a-Quatre" at Full Speed.  
She covered 124.2 miles in 5 hours, 16 minutes, 51½ seconds.




"La Rapee III," Winning the 93.15-Mile Race in 4 Hours, 30 Minutes, 22 1-5 Seconds.

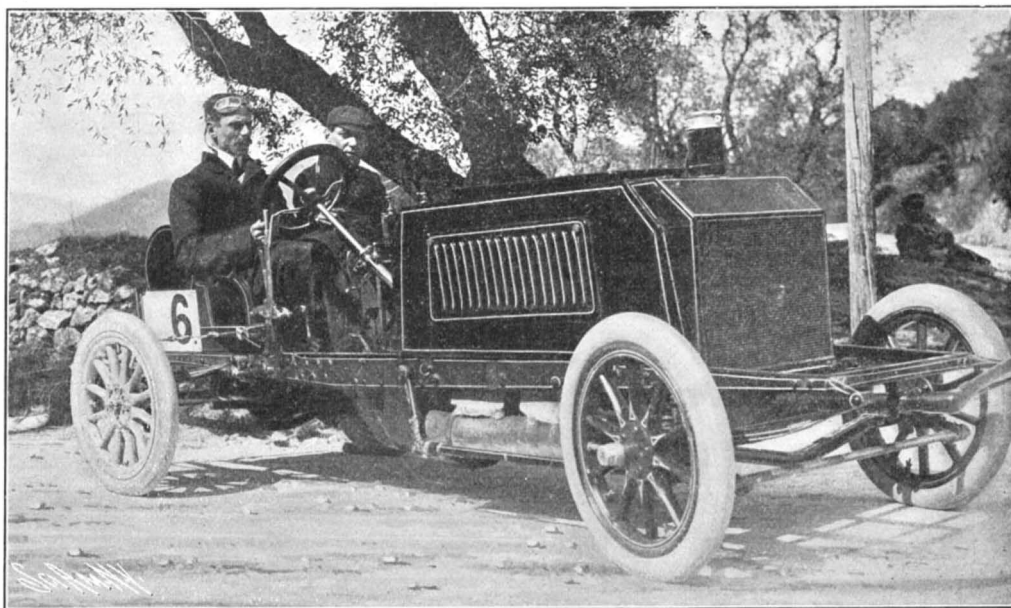

Lieut.-Col. Mark Mahew on His 100-Horse-Power Napier Racer.

Record: One mile from a standing start in 1 minute, 3 seconds. One kilometer with a flying start in 27½ seconds. (Third place.)

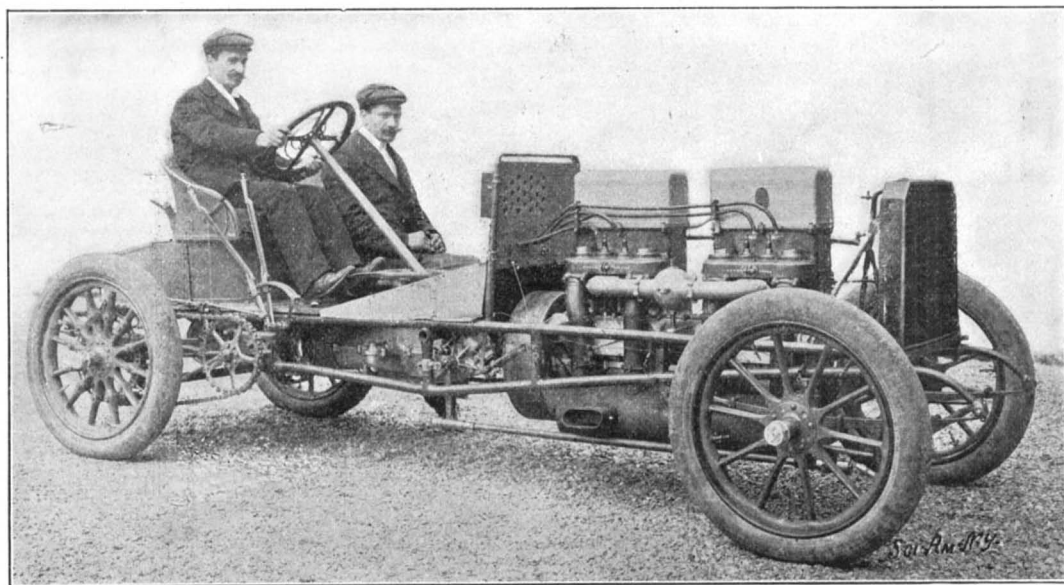

Rigolly on His 100-Horse-Power Gobron-Brillié Racer.

Record: One mile from a standing start in 53½ seconds. One kilometer with a flying start in 23½ seconds.



Werner on an 80-Horse-Power Mercedes Racer.

Record: One mile from a standing start in 57½ seconds. (Third place.) One kilometer with a flying start in 29½ seconds.

#### THE AUTOMOBILE SPEED TRIALS AND MOTOR-BOAT RACES AT NICE AND MONACO.

or smooth as the cement road of the Promenade, was not bad enough to prevent the breaking of records.

Last year the Serpollet steam racer swept all records away and won for the third time (and thus permanently) the original Rothschild cup for the flying kilometer, in 29.19 seconds. A new cup was immediately donated by Baron de Rothschild, and was won for the first time last year by Hieronymus on a Mercedes car in 31.66 seconds. This, the best time previously of a gasoline racer in the Nice speed trials for the flying kilometer, was cut this year to 23 3-5 seconds by Rigolly on a 100-horse-power (nominal) Gobron-Brillié car. This new time for the kilometer corresponds to a speed of 152.54 kilometers, or 94.70 miles, an hour, which is an increase of 24.37 miles an hour in the rate of speed over that attained last year by Hieronymus on the 60-horse-power Mercedes. When the fact is taken into consideration that this much faster speed was attained on a poorer roadbed than that on which last year's records were made, one can readily see that there has been not only a considerable increase in the power of the machines, but also an increase in skill in guiding them. The sensations of

an hour. A 5-horse-power Griffon machine was second in 1 minute, 9 seconds. The previous world's record for this event was 1 minute, 13 4-5 seconds, held by a Griffon machine.

There were eight huge racing cars in the speed trials, two of which were 100-horse-power Gobron-Brillié machines; one, a new 100-horse-power Napier racer; and four, 80-horse-power Mercedes racers. The Gobron-Brillié cars won all the trials, and tied each other in the mile from a standing start, which they covered in 53 3-5 seconds. The older of these two machines, driven by Duray, is fitted with three speeds, while the new car, driven by Rigolly, has four. This gave Duray an advantage when there was but a short distance in which to start, or in starting from a standstill. Four Mercedes machines made the next best times to the Gobron-Brillié's in the mile from a standing start, the first of these, driven by Werner, making it in 57 4-5. Mark Mahew, on his Napier, was seventh in 1 minute, 3 seconds.

The great events of the trials were the flying kilometer tests for the second and third Rothschild cups, which can be competed for by machines with explosive

rough road in a most startling manner. But it was past before one could realize one's danger should anything go wrong. The spectators expected that a new record had been created, and cheered vociferously. Rigolly's machine covered the kilometer in 23 3-5 seconds, or at a 12½-mile-an-hour faster rate of speed than that attained by the Napier. The other Gobron-Brillié was second in 25 1-5 seconds, and the times of the Mercedes machines were 29, 29 1-5, 29 3-5, 29 4-5, and 30 2-5 seconds respectively. The Mercedes, which we illustrate, driven by Werner, was fifth in 29 1-5 seconds.

The Gobron-Brillié machines have been manufactured in France for a number of years past, and a full description of them will be found in the SCIENTIFIC AMERICAN for December 28, 1901. Their great peculiarity is the employment of a double piston motor in which the explosion occurs between the two pistons, driving them apart. The four-cylinder motor used on the present car has eight pistons. The casings on top of the cylinders cover the piston rods and the connecting rods which extend down to the crank shaft. The positive fuel-feed device which has been used heretofore has, we understand, been now abandoned for an



automatic carbureter. The Gobron-Brillié motor was one of the first to be adapted to the use of alcohol for fuel. The motor on the record-breaking racer is said to develop in reality nearly 130 horse-power.

All three of the machines illustrated are prospective contestants in the Gordon Bennett Cup Race to be held in Germany in June.

The last event of the day was the third annual hill-climbing contest for the De Caters cup. This cup was first won by Serpollet in 1902, the contest being that year held over a kilometer course on the long Nice-La Turbie hill on the Corniche road, and Serpollet's time being 59 seconds. Last year the test was made over a like distance on Laffrey hill, and Rigolly, on the same Gobron-Brillié machine which Duray is driving this year, cut nine seconds off Serpollet's record. The test this year was over a 500-meter (547-yard) course on the Nice-La Turbie hill, which has an average gradient of about 10 per cent. Duray, on the three-speed machine that won last year, won again this time in 26 seconds, Rigolly, on the four-speed Gobron-Brillié, taking one second longer. Werner, on the 80-horse-power Mercedes, was fourth in 28 seconds. Another Mercedes came in fourth in 28 3-5 seconds, while the Napier racer took fifth place in exactly half a minute. Fletcher and Jenatzy, on Mercedes cars, made a dead heat in 30 1-5 seconds.

The motor-boat races, which were sailed over a hexa-

gonal course 12.5 kilometers (7.84 miles) in length in the Bay of Monaco, began on April 5 with a 150-kilometer (93.15-mile) race for the large, powerful racing boats less than 8 meters (26 1/4 feet) in length and having a total cylinder capacity less than 7.5 liters (457.66 cubic inches); and with a 60-kilometer (37 1/4-mile) race for the smaller cruising launches less than 6.5 meters (21.32 feet) long and with a cylinder capacity of less than 2.5 liters (152.55 cubic inches). A special traveling crane conveyed the boats from the exhibition space to the water's edge, and laid them upon a long incline running out into the water, down into which they were readily slid.

The 150-kilometer race was won in 4 1/2 hours, 22 1-5 seconds by "La Râpée III," a 7.98-meter (26.18-foot) boat built by Tellier and fitted with a Panhard & Levassor, four-cylinder, 35-horse-power motor having a cylinder capacity of 7.363 liters (449.30 cubic inches). The "Princess Elizabeth," which came in second in 5 hours, 18 minutes, and 4 seconds, is exactly the same type and length of boat, and is fitted with a four-cylinder Delahaye motor having a cylinder capacity of 7.443 liters (454.186 cubic inches).

Out of seven racers and six cruisers which started, only three of the former completed the race, while five of the latter succeeded in finishing. This shows that the ordinary launch with an engine of moderate horse-power is much more reliable than the light racing

shell propelled by a high-power motor and generally termed an autqmobile, or motor, boat.

The winner of the 200-kilometer (124.2-mile) race—the "Trèfle-à-Quatre"—as well as "La Râpée III," are shown in the photographs taken during the race. An idea of the fine lines of these boats can be had by noting the bow wave, which is so thin as to be quite transparent, the waterline of the boat being readily seen through it. The "Trèfle-à-Quatre" is fitted with a Georges Richard-Brazier four-cylinder motor. Its time for the 200 kilometers was 5 hours, 16 minutes, 51 3-5 seconds.

The motor-boat races were carried out successfully and with but one serious accident. This happened to the "Parisienne II," a very long racer equipped with three motors of about 70 horse-power each. This boat caught fire from a gasoline leak, and the gasoline in her tanks made a furious flame. The three men of the crew escaped by jumping overboard, and two of them were badly burned. As the boat had a steel hull, it was not destroyed, although the engines were ruined.

There are said to be 42,000 locomotives in this country, and of these about 3,200 are supplied with electric headlights, while 1,650 are equipped with acetylene generators. The remainder of these engines are making use of oil for the headlight illuminant.

## RECENTLY PATENTED INVENTIONS.

### Electrical Devices.

**PRINTING-TELEGRAPH RECEIVER.**—J. D. WHITE, 50 Clanricarde Gardens, London, England. The present receiver differs in various ways from a simple form of printing-telegraph receiver and one more complex described in two former patents granted to Mr. White. The mechanism is operated by an electro-mechanical device by which the rotation of the type-cylinder is effected by currents of one polarity sent along a single wire, while the other cylinder is operated by currents of the opposite polarity sent along the same wire; but the operation is not limited to this particular device. It may also be operated by any of the other electro-mechanical devices used in receivers to rotate type wheels and to effect printing.

**RELAY-MAGNET.**—W. PALMER, JR., Rincon, New Mexico. The object in this case is to provide a simple and practical relay-magnet of a kind designed to enable the current from a local battery to be directed at will through either one of two electromagnets by merely reversing the polarity of the current on the main line at a remote point.

**MEGAPLEX RELAY.**—R. A. ENGLER, Dubuque, Iowa. In Mr. Engler's invention the improvement relates to relays, and more particularly to a type of relay for increasing the effect of feeble currents—such for instance, as are employed in telephony. The structure is such as to increase the effect in various ways, and especially to permit several distinct devices to act cumulatively.

### Hardware.

**SASH-FASTENER.**—J. A. LONG, Spokane, Wash. In this patent the invention relates to a device for securing the meeting-rails of an ordinary window-sash that operates in a vertical direction. One object is to provide an improved form of sash-fastener that will engage the under face of the upper-sash rail and not be dependent upon the means of securing one portion of the sash-fastener to said rail. Another, to provide an improved form of device that will securely hold the rails together and prevent unauthorized operation of the window-sash.

**WIRE-FENCE TOOL.**—J. A. MILLER, Avondale Col. In the present case the invention pertains to tools employed in the erection and repair of wire fences, and has for its object to provide a tool of that character having details of construction that adapt it for efficient service as a wire-stretcher and a staple-pulling implement.

**LEVEL, PLUMB, AND INCLINOMETER.**—J. HAPPEL, Cleveland, N. Y. The purpose in this instance is to provide details of construction for a device which adapts it for convenient and reliable service to determine if an object or surface that may be fixed or movable is plumb, level or inclined, and define the degree of inclination or deviation from a perpendicular or horizontal plane.

**SASH-LOCK.**—C. W. RANDALL, Lockport, N. Y. In this lock the object in view is to provide a device which may be applied to one of the meeting-rails of a pair of sashes, said device serving to hold the sash or sashes in adjudged positions for preventing rattling thereof under the pressure of wind, the device being readily adjustable to sashes of different thicknesses in order that it may be used generally on different sizes and styles of sashes.

### Household Utilities.

**SAD-IRON.**—M. JOYCE, Salt Lake City, Utah. To enable this iron to compete commercially with cheaper irons, the inventor casts the body in one integral piece, with guide-lugs projecting upward therefrom, and provides a wooden handle with a metallic connection-plate adapted to lie between the lugs of the iron-body and

separated from the handle by a non-conducting shield, said plate having a stop-bar and a spring-dog connected with a headed pin or screw fastened on the upper side of the iron-body. The invention relates to irons of the type disclosed in two prior patents granted Mr. Joyce.

**BED-COVERING.**—E. W. BROWN, New York, N. Y. Mr. Brown's invention relates to coverings for beds, couches, cribs, and cots. His improvements enable the bed-clothing to be fastened in place easily and quickly so that the covering cannot be "kicked off," thus affording protection to the sleeper. Covering may be suspended in elevated position and in a way form a drapery, which depends from the suspended covering to the sides and foot end of the bed, thus keeping from coming in contact with the person, while protecting from drafts.

### Of General Interest.

**SELF-LOCKING TACKLE-BLOCK.**—J. O. WALTON, Boston, Mass. The present invention consists in a simple guard combined with or formed on the block on its rear side just behind the cramping-pulley, so that the run of this part of the rope will be thrown laterally away from the cramping-face on the rear side, but will not interfere with the locking of the rope on the front side. A self-locking pulley-block has been shown and described in a former patent granted to Capt. Walton.

**WINDOW-CLEANER.**—J. C. G. FRITZ, New York, N. Y. The object of the invention is to provide a window-cleaner more especially designed for use on windows of locomotive-cabs, platform-windows of street-cars, and other vehicles and arranged to permit the engineer, motorman, driver, or other person to keep the outlook-window perfectly clear from frost, moisture, dirt, and the like and permit at all times a clear view of the path in front of the vehicle to avoid collisions.

**NON-REFILLABLE BOTTLE.**—W. C. BEAL, Fernandina, Fla. In this patent the improvement refers to a class of liquid-packages that are provided with means to expose or prevent the reuse of the receptacle after the contents have been removed, and has for its object to provide novel details of construction for a bottle and its closure which will effectively prevent the refilling of the bottle after the contents have been partially or wholly decanted.

**GARMENT-SUPPORTER FOR MEN.**—W. A. WRIGHT, New York, N. Y. The purpose in this case is to provide a form of garment-supporter especially adapted for use in connection with trousers and so constructed that it will include a button or stud to receive a suspender-end, a member for supporting engagement with a pair of trousers, a member, if so desired, adapted to prevent the upward movement of a belt, and a member whereby to apply the device to the inner face of the trousers waist-band.

**STEERING AND STEADYING MECHANISM FOR BOATS.**—W. H. YOUNG, Troy, N. Y. In this patent the invention has reference to improvements in steering and steadying mechanism for marine vessels, the object in view being the provision of a simple means whereby the boat may be easily steered and also prevented to a great extent from rocking and pitching.

**CIGARETTE OR CIGAR BOX.**—A. G. PSIAKI, New York, N. Y. The present invention has reference to improvements in cigarette or cigar boxes of the kind in which cigarettes or cigars are originally packed for sale; and an object is to provide a box of novel construction and having a receptacle for holding matches furnished with each package.

**NOTE.**—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

## Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. In every case it is necessary to give the number of the inquiry.

MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

**Inquiry No. 5438.**—For makers of armatura core punchings in sheet metal, of the ring type.

**AUTOS.**—Duryea Power Co., Reading, Pa.

**Inquiry No. 5439.**—For clocks for a factory, which are electrically controlled from one master clock. For hoisting engines. J. S. Mundy, Newark, N. J.

**Inquiry No. 5440.**—For the makers of the "Merritt" typewriter, or dealers in repair parts therefor.

"U. S." Metal Polish. Indianapolis. Samples free.

**Inquiry No. 5441.**—For parties engaged in the manufacture or designing of clock cases.

Handle & Spoke Mch. Ober Mfg. Co., 10 Bell St., Chagrin Falls, O.

**Inquiry No. 5442.**—For manufacturers of light wooden and metal specialties.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

**Inquiry No. 5443.**—For manufacturers of vulcanized fiber specialties.

American inventions negotiated in Europe. Wenzel & Hamburger, Equitable Building, Berlin, Germany.

**Inquiry No. 5444.**—For manufacturers of machines for turning and boring hub blocks.

Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway New York. Free on application.

**Inquiry No. 5445.**—For manufacturers of balloons.

Fine machine work of all kinds. Electrical instruments a specialty. Models built to order. Page Machine Co., 812 Greenwich Street, New York.

**Inquiry No. 5446.**—For woodworking machines for such work as dowels, skewers, etc.

The largest manufacturer in the world of merry-go-rounds, shooting galleries and hand organs. For prices and terms write to C. W. Parker, Abilene, Kan.

**Inquiry No. 5447.**—For manufacturers of heavy corded webbing.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Refrigerating Machine Company. Foot of East 138th Street, New York.

**Inquiry No. 5448.**—For machinery for making earthenware water pipes.

In buying or selling patents money may be saved and time gained by writing Chas. A. Scott, 340 Cuttler Building, Rochester, New York.

Highest references.

**Inquiry No. 5449.**—For the address of the Furber Patent Shoe Company.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machinery and tools. Quadriga Manufacturing Company, 18 South Canal Street, Chicago.

**Inquiry No. 5450.**—For the address of the U. S. Silver Co., also of the Crown Silver Co.

Patentable, combined working machine for sale. For cabinet makers, machinists, amateurs. Has capacity of 12 different apparatus. Foot power. Also a working bench to match. All rights to buyer. Sold separately or together. Buddig, Eusis, Neb.

**Inquiry No. 5451.**—For manufacturers of machinery for making tooth brushes.

FOR SALE.—35 H. P. Berger Gas Engine. A splendid engine at a bargain. Burrell & Morgan, Elkhart, Ind.

**Inquiry No. 5452.**—For the address of the Pyle National Electric Headlight Co.

FOR SALE.—Home and foreign patent rights covering Combination Pastry Knife. Comprises five utilities. Cost 3 cents to manufacture. Adapted to mail order custom. F. A. Tobler, Bisbee, Arizona.

**Inquiry No. 5453.**—For makers of a bower-barffing equipment.

**Inquiry No. 5454.**—For dealers in sulphuric acid in tank cars in quantities.


**Inquiry No. 5455.**—For a small ice machine, which is not expensive, and which is really suitable for family use.

**Inquiry No. 5456.**—For the address of Geo. W. Shaw, manufacturer of wooden mantels, coal and gas grates.

**Inquiry No. 5457.**—For an electrical device by means of which the number of feet of water in a reservoir or tank can be ascertained at a distance of 4 or 5 miles.

**Inquiry No. 5458.**—For manufacturers of stamped steel ceilings.

**Inquiry No. 5459.**—For machines for making paper boxes and cartons.



### HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(9378) H. L. J. says: I was recently shown an optical illusion which puzzles me. A chicken feather was placed near my eye, and looking through it at my hand with fingers slightly opened, and distant about 15 inches, I saw the bones in my fingers, as clear and distinct in outline as with the X-ray. So did others of the party. Again, the feather held in same manner between the eye and the sun when near the setting horizon, showed all the colors of the rainbow in same order and position. Please give the philosophy of all this. A. The experiment you made in looking through the meshes in the feather was an experiment in diffraction. When you looked at your finger held at a distance from the feather you saw a fringe or shadow which followed the outline of the edges of the finger. It did not resemble the outline of the bones at all, as they are seen on the fluorescent screen by X-rays. By the X-ray you see the bones as shadows, larger at the joints; you see the tapering shafts of the bones also. Here you only see the outline of the flesh of the fingers in a double line on each side of the finger. To test the matter use a lead pencil or a stick of about the size of the finger, and you can see the bone in a stick exactly as well as in your finger. There has been a very ingenious toy called the "bonescope" made on this basis. A piece of fine cloth is stretched over a half-inch hole in a bit of wood, which may be two inches across and a half inch thick. On looking through the hole in the center you may see all that you describe. The colors seen on the horizon and in looking at the setting sun are due to the interference of light. You will find all these appearances described, under "Diffraction and Interference of Light." The experiment is very curious, but is explained without difficulty. See Weight's "Light," which we can furnish for \$2 mailed.

(9379) G. E. C. asks: 1. How many cubic feet capacity would be necessary in a tank or other reservoir, holding compressed air at a pressure of 200 pounds to the square inch, at the start, to run an engine furnishing 1 horse-power one hour? How large if the pressure was only 100 pounds at start? A. An engine running at a uniform air pressure of 50 pounds per square inch, at one half cut-off, requires 13 1/2 cubic feet of free air per minute, delivered at ordinary temperature. The supply of air from a high-pressure tank, say of 200 pounds to 50 pounds, reduces the temperature over 300 deg. F. with an expansion of about two and one-half volumes; so that if heat can be added to the air after expansion from the tank, a considerable economy may be obtained in using compressed air from both pressures. The tank must have a reserve ca-

capacity for the engine running pressure at 50 pounds, and, therefore, the relative volumes being 14 1-3 at 200 pounds and 4 1-3 at 50 pounds, we find that the tank should have a capacity of 81 cubic feet at 200 pounds pressure, or say 3 feet diameter by 12 feet in length; and for 100 pounds initial pressure, a tank twice the capacity, or 4 feet diameter by 13 feet long. 2. Could a windmill be used for compressing the air, thus conveying the energy of the wind to the engine, and thence to a dynamo, for electric lighting, etc.? Would we not by so doing convert the unsteady, jerky motion of a windmill to an even, steady motion suitable for any purpose? A. A windmill can be used for compressing air to run a motor for driving a dynamo, and with ample storage the 24-hour day's work of the windmill may be stored for supplying the evening light current, either by compressed air or by direct driving of a dynamo and charging storage batteries. See SCIENTIFIC AMERICAN SUPPLEMENT Nos. 709, 606, on windmills for electric supply. 3. About what power would one get for use on the dynamo from an ordinary 8-foot windmill with the speed of wind at which it would do satisfactory work pumping from an 80-foot well? A. An 8 1/2-foot windmill is only equal to one-tenth of a horse-power in a 16-mile-per-hour wind, and is totally unfit for transmission of pneumatic or electric power for any available work. A 30-foot mill is a useful source of power for such work, or equal to 3 horse-power in a 16-mile wind. 4. How many gallons of water flowing from an elevation of 50 feet, when applied to a water motor, will give 1 horse-power for one hour? If I could not use the compressed air as above suggested, could not the wind and water method be used? A. Four thousand gallons of water falling 50 feet in one hour are equal to one theoretical horse-power, and in the way you suggest may be made available for constant power by a reservoir of 12,000 or more gallons. A windmill 25 feet diameter, which has a capacity of 6,000 gallons per hour, 50 feet high, in a 16-mile wind, and with an adjustable pump which will work in any wind down to 8 miles per hour, may be made a useful source of power.

## INDEX OF INVENTIONS

For which Letters Patent of the  
United States were Issued  
for the Week Ending  
April 19, 1904.

AND EACH BEARING THAT DATE  
[See note at end of list about copies of these patents.]

Acids, making ortho-oxy-carbon, G. Wichmann ..... 757,702  
Adding or subtracting machine, J. H. Martin ..... 758,013  
Advertising and exhibiting paints, wall finishes, etc., device or means for, J. F. Gould ..... 757,549  
Air compressor, J. C. Williams ..... 757,704  
Air compressor unloading device, W. S. Fairhurst ..... 757,901  
Air purifier, J. S. Macardie ..... 757,475  
Antiseptic attachment, telephone, H. L. Thompson ..... 757,850  
Apron, storm, G. A. Hughes ..... 757,749  
Autoharp, E. E. Cruger ..... 757,890  
Automobile fender, A. Miesse ..... 758,014  
Automobiles propulsion of electric, J. W. Aylsworth ..... 757,715  
Awning cover, automatic, W. R. Mudd ..... 758,016  
Axle, J. H. Entekin ..... 757,444  
Badges, buttons, mirrors, etc., shell and covering therefor, W. Hornich, Jr. .... 757,744  
Bag. See Odorproof bag.  
Band or strap brake, Middleton & Smith ..... 757,480  
Barrel, kraut dispensing, T. W. McFarland ..... 757,951  
Bath adjustable frame, combined automatic shower and vapor, Linendoll & Houghten ..... 757,933  
Bath spray, V. C. Van't Woud ..... 757,791  
Bath tubs, etc., leg fastening for, T. W. Simcoe ..... 757,974  
Battery plates, apparatus for casting, J. Bijur ..... 757,719  
Battery plates, making storage, J. Bijur ..... 757,718  
Bedclothes holder, F. L. Germain ..... 757,451  
Bedstead and chest, folding, W. A. Arnold ..... 757,430  
Bedstead fastener, H. H. Hirsch ..... 757,924  
Belt fastener, Junkin & Alexander ..... 757,662  
Belt fastening implement, W. W. Woodley ..... 757,589  
Belting and making same, machine, B. G. Hailey ..... 757,919  
Binder, loose leaf, J. W. Husing ..... 757,660  
Binder, temporary, W. J. Rile ..... 757,682  
Binding, A. S. Woodard ..... 757,990  
Binding post, S. C. Houghton ..... 757,809  
Blanks, mechanism for feeding thin flat flexible, L. A. Mayall ..... 757,667  
Blasting compound, J. Tollner ..... 757,693  
Block system emergency apparatus, F. V. Thompson ..... 757,692  
Blotter attachment, desk, J. I. Hayeraft ..... 757,921  
Board for building purposes, A. B. Keyes ..... 757,812  
Boards from structures, implement for detaching, P. Guenther ..... 757,915  
Boat, J. C. Nichol ..... 757,832  
Boilers, cleaning and restoring, A. R. Raymond ..... 757,839  
Book leaf raiser, Sebastian & Stoebe ..... 757,779  
Boot or shoe for athletic purposes, P. A. Valle ..... 757,983  
Boring machine, C. E. Gadfield ..... 757,734  
Boring tool, expansion, W. Pohlman ..... 757,494  
Bottle, blue & Herndon ..... 757,647  
Bottle, J. Auld ..... 757,714  
Bottle, non-refillable, T. M. Wood ..... 757,707  
Bottle, non-refillable, A. Oullie ..... 757,955  
Bottle soaking apparatus, W. B. Wright ..... 757,535  
Bottle stopper and opener, F. Goodrich ..... 757,548  
Bowling alley, A. Herbst ..... 757,922  
Box, M. F. Middleton ..... 757,827  
Box and cutter for goods in ribbon form, combined, F. D. Scott ..... 757,844  
Box forming machine, S. Y. High ..... 757,870  
Bracket, expansive, M. S. Rodenberg ..... 757,772  
Bracket for universal stands or supports, A. L. Robbins ..... 757,498  
Brake handle, C. J. Keplinger ..... 757,468  
Brick car, elevating, A. J. Zilker et al. .... 757,710  
Brick machine, Randall & Vanneman ..... 757,961  
Brick mold, Crapp & Finch ..... 757,726  
Bridge, E. L. & J. C. Dilline ..... 757,804  
Bridge construction, S. W. Hill ..... 757,552  
Bridge construction, arch, S. W. Hill ..... 757,553  
Bridle bit, C. G. Olin ..... 757,954  
Broom, J. Frye ..... 757,814  
Broom, F. R. Lay ..... 757,818  
Brush, floor or like, F. Neidenbach ..... 757,831  
Brush, fountain, A. B. Landreth ..... 757,628  
Brush, fountain, D. E. Dunkle ..... 757,897  
Brush holder, antiseptic tooth, J. A. Cochran ..... 757,885  
Brush with washing device, tooth, F. Fritz ..... 757,907  
Bucket or pail fastener, R. Steidl ..... 757,848

Burglar and fire alarm, M. Nickels ..... 757,490  
Burner. See Gas burner.  
Burner, J. D. Green ..... 757,653  
Button, combination collar and cuff, A. E. Strang ..... 757,978  
Button, garment, R. Steiner ..... 757,576  
Cabinet, L. Pederson ..... 757,957  
Cable grip, T. J. Cook ..... 757,724  
Cable tension regulator, overhead, J. F. & D. J. McKay ..... 757,952  
Camera focusing device, M. Schell ..... 757,968  
Camera, photographic, H. P. Tattersall ..... 757,691  
Camera, photographic, J. A. Pautasso ..... 757,836  
Can capping machine, F. Rogers ..... 757,842  
Can capping machine, J. T. Wilmore ..... 758,034  
Cans, apparatus for exhausting air from fruit, R. C. Davis ..... 757,895  
Candy flattening machine, H. G. Lange ..... 757,472  
Cane crusher, sugar, Wilson & Crumbly ..... 757,988  
Car brake, W. Gossett ..... 757,910  
Car brake and starter, combined, Kellogg & Swain ..... 757,811  
Car, dump, A. King ..... 757,753  
Car engines, apparatus for controlling the speed of motor, A. Krebs ..... 757,815  
Car fender, H. How ..... 757,746  
Car fender, E. Sherwood ..... 757,845  
Car friction and direct-acting spring drafting, combined, F. B. Townsend ..... 757,579  
Car, motor, W. G. Wilson ..... 757,533  
Car or engine replacer, F. J. Fewings ..... 757,608  
Car, ore, C. Canclini ..... 757,860  
Car replacer, C. A. Fischer ..... 757,902  
Car wheels, making, H. V. Loss ..... 757,819  
Cars, flexible metal pipe coupling for connecting the air and steam pipes of railway, G. D. Pettigell ..... 757,493  
Carbide, producing, W. S. Horry ..... 757,617  
Carburetor, S. A. Lockhart ..... 757,935  
Cashiers, registers, and recorders, keyboard mechanism for mechanical, Dement & Hull ..... 757,601  
Casting machine, J. Bijur ..... 757,720  
Casting open-work structures, apparatus for, J. Bijur ..... 757,721  
Cement kiln cleaning machine, C. J. Van Doren ..... 757,522  
Cementing material and making same, T. W. Cappon ..... 757,883  
Chain, drive, E. F. Morse ..... 757,762  
Chair fan or mirror attachment, rocking, J. F. Yoho ..... 757,857  
Chopping block, butcher's, J. T. Nichols ..... 757,488  
Christmas tree candle holder, H. G. Hess ..... 757,869  
Chuck, C. R. Moon ..... 757,561  
Cigar manufacturing machine, B. Wertheimer ..... 757,584  
Cigars with smoke improving portions, providing, H. F. M. Thoms ..... 757,514  
Circuit controller for induction coils, R. Varley ..... 757,792  
Clothes drier, P. A. Ringnell ..... 757,497  
Cluster socket, J. H. Dale ..... 757,441  
Clutch mechanism, Ford-Smith & Coventry ..... 757,805  
Coal tipple structure, T. W. Fitch, Jr. .... 757,732  
Cock safety attachment, gas, B. F. Edwards ..... 757,652  
Coffee roaster, J. E. Herriott ..... 757,743  
Coin controlled apparatus, W. Webber ..... 757,530  
Coin controlled dispensing apparatus, D. Sullivan ..... 757,690  
Coin counting and packaging machine, E. N. Gillilan ..... 757,612  
Coin detector, F. G. Hartell ..... 757,741  
Coke oven, retort, A. C. Kloman ..... 757,469  
Coke oven, retort, W. M. Scott ..... 757,509  
Coloring machine, A. C. Hough ..... 757,554  
Commutator, automatic, J. H. Mercadier ..... 757,942  
Compound engine, S. Rothschild ..... 757,965  
Computing machine, Scott & Taylor ..... 757,508  
Concrete piles, sectional core for making, G. H. Per ..... 757,767  
Conveyor, spout coupling, sectional, C. F. Spencer ..... 757,573  
Conveying apparatus, material, H. Marcus ..... 757,477  
Cooking retort or kettle, O. Hubbell ..... 757,555  
Cooling apparatus, E. P. F. Magniez ..... 757,822  
Copper and zinc from ores, electrolytically extracting, S. Laszcynski ..... 757,817  
Cot, P. D. Heather ..... 758,008  
Cream separator, C. T. McCarroll ..... 757,669  
Crusher. See Cane crusher.  
Cultivator, O. H. Cloyd ..... 757,862  
Curtain and shade roller holder, combined window, A. F. Gilbert ..... 757,547  
Curtain drying and stretching frame, lace, G. F. Hullings ..... 757,930  
Curtain fastener, F. P. Pfeigbar ..... 757,838  
Dam, portable power, T. F. Gilliland ..... 757,906  
Dental appliance, W. T. Lyon ..... 757,938  
Desk, hotel register, J. I. Hayercraft ..... 757,920  
Disinfecting apparatus, A. Giersiepen ..... 757,806  
Display rack or case, C. D. Allen ..... 757,643  
Distillation of wood and production of charcoal, apparatus for the, H. A. Mackie ..... 757,939  
Draft and buffing mechanism, F. W. Ritter ..... 757,841  
Draft device, C. R. Davis ..... 757,995  
Draft equalizer, E. F. Moran ..... 757,761  
Dredger or shaker, powder, C. E. Grapevine ..... 757,912  
Drilling and automatic centering device, McElwain & Young ..... 757,950  
Dust guard, E. Jacquemin ..... 757,466  
Dyeing apparatus, automatic, J. Marshall ..... 757,478  
Electric arc rupturing device, S. H. Short ..... 757,782  
Electric controller, A. C. Eastwood ..... 757,808  
Electric furnace, Horry & Price ..... 757,621  
Electric lighting and power system, W. A. Turbayne ..... 757,695  
Electric motor, reciprocating, A. F. Christmas ..... 757,991  
Electric resistance furnace, E. F. Price ..... 757,634  
Electric switch, G. H. Whittingham ..... 757,853  
Electric switch, C. F. Hopewell ..... 757,925  
Electric switches or the like, means for protecting live parts of, W. McDevitt ..... 757,830  
Electrical generating system, W. A. Bole ..... 757,436  
Electrolytic deposition apparatus, W. J. J. H. Jory ..... 757,557  
Electrotype plates, mechanism for holding, C. W. Eberhard ..... 757,603  
Elevator brake mechanism, A. Sundh ..... 757,789  
Elevator hoisting gear, A. Sundh ..... 757,788  
Embossing machine, H. S. Maidhof ..... 757,785  
Embossing machine platens, rotary support for, H. S. Maidhof ..... 757,759  
End gate, O. B. Reynolds ..... 757,680  
Engine whistle attachment, gas, W. L. Paul ..... 757,673  
Engines, flywheel for quick-running internal combustion, F. Reischenbach ..... 757,636  
Envelope and sheet of paper, combined, R. N. Wilt ..... 757,801  
Envelope fastener, G. D. Barber ..... 757,716  
Envelope or expanding wallet, A. Bushnell, Jr. .... 757,596  
Excavators, car placing attachment for, H. H. George, Jr. .... 757,450  
Excavators, car placing attachment for power, H. H. George, Jr. .... 757,449  
Exercising apparatus, G. Yoerger ..... 757,709  
Explosive compound, J. P. Arnold ..... 757,713  
Explosive engine, H. R. Palmer ..... 757,632  
Extension table, J. F. Dobrodenska ..... 757,544  
Eye shade, N. R. Wickersham ..... 757,854  
Eyelet, J. C. Engels ..... 757,905  
Fan, F. N. Roehrich ..... 757,774  
Fan, electric, F. N. Roehrich ..... 757,773  
Fan for disinfecting purposes, W. W. Rossiter ..... 757,684  
Feed cutter, F. Hamachek ..... 757,614  
Feed water heater, J. E. Lewis ..... 757,665  
Feed water heater, S. W. Simpson ..... 757,846  
Feed water regulator, J. B. Perkins ..... 757,837  
Fence post, V. E. Randall ..... 757,962  
Fence post, M. C. Wix ..... 757,989  
Fence post, H. J. Donahoe ..... 758,002  
Fence weaving machine, wire, A. E. Blashill ..... 757,646  
Fence, wire, W. B. Hughes ..... 757,928  
Fender. See Automobile fender. Car fender.  
Fire alarm, T. P. Litaker ..... 757,934  
Fireproof building construction, G. A. Turnbull ..... 757,519  
Fish line reel, E. D. Rockwell ..... 757,964  
Fluids, apparatus for regulating the flow of, J. J. Royle ..... 757,502  
Fluids or solid materials, apparatus for operating on finely-divided, J. Luhn ..... 757,757  
Folding table, W. R. Montgomery ..... 757,481  
Food products, apparatus for preparing cereal, J. H. Miller ..... 757,945

**"Star" Lathes**  
Foot and Power  
Screw Cutting  
Automatic Cross Feed  
FOR FINE, ACCURATE WORK  
Send for Catalogue B.  
SENECA FALLS MFG. CO.  
695 Water Street,  
Seneca Falls, N.Y., U.S.A.

**ENGINE & FOOT LATHES**  
MACHINE SHOP OUTFITS  
TOOLS AND SUPPLIES  
SEBASTIAN LATHE CO. CINCINNATI, O.  
CATALOGUE FREE

**Suppose You Save**  
50 Cents On Your First Belting Cost, And Breaks And General Belt Debility Costs You A Couple Of Dollars Every Now And Then, Where's The Initial Saving Gone?  
True happiness lies in the use of SCHIEREN BELTING, and its cost isn't so much. Dixie Belt Leather Book tells.  
**CHAS. A. SCHIEREN & CO.**  
NEW YORK: 52 Perry St.  
CHICAGO: 192 Franklin St.  
BOSTON: 192 Lincoln St.  
PITTSBURGH: 243 Third Av.  
PHILADELPHIA: 228 N. Third St.  
DENVER: 1519 Sixteenth St.  
HAMBURG: Pickhuben 4.

**Veeder Counters**  
to register reciprocating movements or revolutions. Cut full size.  
Booklet Free  
**VEEDER MFG. CO.**  
Hartford, Conn.  
Cyclometers, Odometers, Tachometers, Counters and Fine Castings.

**You Drink Down Disease**  
every time you take a draught of water that has not been filtered. Impurity lurks in it. Germs of disease cannot be seen, but they cannot pass through the celebrated  
**Berkefeld Filter**  
because it is so scientifically constructed as to suppress every atom of solid matter in the water, thoroughly purifying it. Will give one gallon of pure water in 4 minutes.  
No trouble to clean or keep in order.  
**BERKEFELD FILTER CO., 4 Cedar Street, New York**

**STEAM TURBINES. — THEIR CONSTRUCTION, Operation and Commercial Application.**  
SCIENTIFIC AMERICAN SUPPLEMENTS 1306, 1307, 1308, 1422, 1466, 1447, 1376, 1372. The articles have all been prepared by experts in steam engineering. Price 10 cents each, by mail. Munn & Co., 361 Broadway, New York City, and all newsdealers.

**WORK SHOPS**  
of Wood and Metal Workers, without steam power, equipped with  
**BARNES' FOOT POWER MACHINERY**  
allow lower bids on jobs, and give greater profit on the work. Machines sent on trial if desired. Catalog Free.  
**W. F. & JOHN BARNES CO.**  
Established 1872.  
1999 RUBY ST., ROCKFORD, ILL.

**FOR LIGHT AND MEDIUM WORK**  
this new 14 inch  
**B. F. BARNES**  
Upright Drill is the best tool made. Substantial, well built, up to date. The driving power is strong and positive—the five-step cone gives wide range of speeds—will drill from 1/16-inch to 3/4-inch. Reading matter on request.  
**B. F. BARNES COMPANY, Rockford, Ill.**


**TO MINE OWNERS**  
You need a **Holding Engine**. You want the best, strongest, safest, most up-to-date engine that is made—the most durable and yet the greatest power saver of money. Send for our free catalogue and state the size of engine you want. We build them for mines, quarries and docks. Both friction and geared hoists, 5 to 120 H. P. All parts easily interchangeable.  
**WEBER, CAS & CASLINE ENGINE CO., P. O. Box 1114, Kansas City, Mo.**  
EASTERN OFFICE, 115 Liberty Street, New York City.

**GAS ENGINE IGNITERS**  
Price \$15.  
for Marine, Stationary and Automobile engines. Will save their cost many times over in one year.  
Write for circulars.  
**The Carlisle & Finch Co.,**  
233 E. Clifton Ave., Cincinnati, O.

**Volt Ammeters**  
Pocket size, but large enough for accuracy and practical use. Various ranges for testing batteries, electric light, telephone and other circuits, etc. Also Voltmeters and Ammeters for general measurements.  
Send for Circular.  
**L. M. PIGNOLET,**  
50 Cortlandt St., New York, N.Y.

Foods, apparatus for retaining heat in, E. C. Kirk ..... 758,009  
Fruit or berry box, J. E. Lyman ..... 757,558  
Fruit or vegetable eye extractor, R. Patterson ..... 757,835  
Fruits, treating, C. R. Wilson ..... 757,706  
Furnace, S. C. Davidson ..... 757,442  
Furnace, O. Wundrack ..... 757,536  
Furnace, Mylin & White ..... 757,949  
Furnace ash chute, F. J. Blum ..... 757,435  
Furnaces, means for operating hydrocarbon burners for metallurgical, H. W. Falk ..... 757,606  
Furring clip, metallic, D. Ewart ..... 757,863  
Furring wall, J. H. Nicholson ..... 757,480  
Fuse making machine, Lispenard & Truett ..... 757,434  
Game, P. D. Bird ..... 757,470  
Game, J. R. Knapp ..... 757,470  
Game board, D. Stanger ..... 757,976  
Game table, J. S. Croxford ..... 757,440  
Garment supporter, T. M. Wheelless ..... 757,701  
Gas battery, J. H. Reid ..... 757,637  
Gas burner, O. D. Cornell ..... 757,651  
Gas burner attachment, E. D. McCall ..... 757,482  
Gas generator, H. C. Hanson ..... 757,615  
Gas generator, acetylene, G. J. Stinson ..... 757,577  
Gas generator, acetylene, G. A. Bidwell ..... 757,875  
Gas generator and burner, oil, J. P. Tirrell ..... 757,980  
Gas holder, J. H. Coke ..... 757,887  
Gas meter, dry, S. Kozminski ..... 757,627  
Gas mixer, A. M. Gummert ..... 757,916  
Gear cutting machine, W. A. Twining ..... 757,696  
Glass melting furnace, M. M. Maher ..... 757,666  
Glue and gelatin from bones, making, H. Hilbert ..... 757,658  
Golf ball, T. C. Crawford ..... 757,600  
Governor, engine valve, C. Kuhlewind ..... 758,010  
Governor, speed, C. Robinson ..... 758,020  
Grain drill, L. E. Roby ..... 757,771  
Grain screen, F. Freden ..... 757,905  
Grate or fireplace, fire, F. J. Bostel ..... 757,595  
Greenhouse or other glazed structure, C. B. Weathered ..... 757,986  
Grinding or sharpening device, I. M. Rose ..... 757,843  
Grip fastener, multiple, H. A. Meyerord ..... 757,944  
Guns, auxiliary barrel for breech loading, V. C. Tasker ..... 757,790  
Hammock stand, folding, G. F. Allen ..... 757,428  
Harness, F. J. Schenk ..... 757,682  
Harp, T. J. Hissom ..... 757,482  
Harvesting machine divider, G. Wilson ..... 757,587  
Hat trimming machine, F. C. Craw ..... 757,542  
Headlight, electric, W. H. Northall ..... 757,564  
Heating, electric, W. S. Horry ..... 757,618  
Heating, electric, E. F. Price ..... 757,633  
Heating furnace, hot air, E. A. Tuttle ..... 757,520  
Hinge, J. W. Skilton ..... 757,784  
Hinge, frictional locking, P. C. Palmer ..... 757,492  
Hinge, spring, H. L. Ferris ..... 757,607  
Hitching post, T. C. Butterworth ..... 757,882  
Hoof pad, E. E. Lemon ..... 757,473  
Horseshoe, Fisher & Corrodi ..... 757,445  
Horticultural implement, E. Haines ..... 757,739  
Hose, F. B. Bosch ..... 757,877  
Hose coupling, F. W. Killen ..... 757,752  
Hose, rod, or pipe coupling, A. W. Hubsman ..... 757,929  
Hot air furnace, E. A. Tuttle ..... 757,521  
Household tool, H. H. Tyrrell ..... 757,981  
Hydraulic jack, F. H. Stillman ..... 757,512  
Index, ledger, G. C. Shepherd ..... 757,510  
Indexing card holder, H. Scudder ..... 757,686  
Induction coil, R. Varley ..... 757,523  
Induction coil vibrator, R. Varley ..... 757,527  
Injector, steam boiler, T. J. Sweeney ..... 757,849  
Insulator, J. W. Osborne ..... 757,765  
Iron pyrites for desulfurization, preparing, U. Wedge ..... 757,531  
Jar fastener, S. A. Roden ..... 757,683  
Knitting machine needle, S. Woodward ..... 757,708  
Lace fastener, F. E. Stoke ..... 757,977  
Lacing device, E. T. Dixon, Sr. .... 758,001  
Lacing loop, G. W. Prentice ..... 757,678  
Ladder, step, P. Herder, Jr. .... 757,616  
Lamp burner, coal oil, H. J. Pawling ..... 757,674  
Lamp, electric arc, R. Hofpelt ..... 757,659  
Lamp, electric arc, F. Sindichristensen ..... 757,847  
Lamp, electric arc, J. W. Percival ..... 757,958  
Lamp, vapor, E. Seitz ..... 757,780  
Land roller, R. V. Wallace ..... 757,583  
Latch, O. F. Immler ..... 757,464  
Lathe taper attachment, turret, C. G. Richardson ..... 757,681  
Letter box, H. H. Warner ..... 757,698  
Line holder, C. Lykke ..... 757,820  
Linotype machine, S. J. Briden ..... 757,648  
Linotype machine, D. D. Scott ..... 757,685  
Liquid dispensing apparatus, C. A. Gilde-meyer ..... 757,611  
Liquid dispensing apparatus, W. B. Cochran ..... 757,886  
Lister, C. R. Davis ..... 757,997  
Loading apparatus for tramways, H. M. Sackett ..... 757,777  
Lock, S. Wisniewski ..... 757,588  
Lock, L. A. Frank ..... 757,733  
Lock and latch, H. G. Voight ..... 757,529  
Locomotive fire door, G. S. Edmonds ..... 757,545  
Loom picker motion, D. D. Miller ..... 757,828  
Looms, spooler for moquette or other pile fabric, J. F. Walker ..... 758,028  
Luggage carrier, F. Dales ..... 757,892  
Mail box, Sturgis & Allen ..... 757,513  
Mail delivery system, rural, W. A. Sumner et al. .... 757,787  
Mandrel, pipe, W. Alderdice ..... 757,872  
Mantle support, W. P. Johnson ..... 757,556  
Match machine, M. A. Sheldon ..... 757,572  
Measuring apparatus, C. R. Hudson ..... 757,810  
Measuring instrument, prepayment electrical, F. Conrad ..... 757,439  
Mechanical movement, D. W. Shiek ..... 757,511  
Metal bar cutting apparatus, V. E. Edwards ..... 757,604  
Metal sheets, machine for separating, G. Grove ..... 757,453  
Metal sheets, separating, G. Grove ..... 757,454  
Milk vat, G. H. Simon ..... 757,569  
Miter box, C. A. Anderson ..... 757,928  
Motor, J. T. McGrath ..... 757,485  
Mowing machine cutting apparatus, J. H. Wickamp ..... 757,586  
Multicylinder expansion engine, C. J. Williams ..... 757,532  
Music controller roll, A. Anderson ..... 757,874  
Music leaf turner, C. Thoma, Jr. .... 757,979  
Nail blank feeding and sorting machine, Pierce & Newton ..... 757,676  
Nasal shield, T. Carance ..... 758,029  
Necktie securing device, F. Ferguson ..... 757,730  
Nut axle, C. Schneider, Sr. .... 757,606  
Nut lock, J. W. Hancock ..... 757,457  
Nut lock, W. Rundle ..... 757,775  
Nut lock, R. Varley ..... 757,526  
Nut wrench, W. E. Gilliland ..... 757,613  
Odor-proof bag, W. P. Flowers ..... 757,610  
Ore concentrator, centrifugal, E. R. Week ..... 757,699  
Ornamental fabric, A. S. Waizfelder ..... 757,851  
Packed joint, F. B. Clark ..... 757,992  
Packing box, M. O. Anthony ..... 757,591  
Packing, rod, C. W. Caldwell ..... 757,597  
Pad. See Hoof pad.  
Pad or tree protector, G. E. Brown ..... 757,437  
Pamphlet folding and wrapping apparatus, S. Elliott ..... 757,728  
Paper clip or holder, W. Lukes ..... 757,937  
Paper feeding device, T. G. & J. B. McGirr ..... 757,484  
Peeler, fruit or vegetable, T. M. Guest ..... 757,550  
Pen, A. Hart ..... 757,551  
Pen, fountain, W. R. Rothwell ..... 757,868  
Pen, fountain, M. R. Crossman ..... 757,543  
Pen, fountain, P. M. Kegrize ..... 757,664  
Phase angle adjust means, E. M. Tingley ..... 757,516  
Phase angle adjustment, E. M. Tingley ..... 757,517  
Phase regulation, E. M. Tingley ..... 757,515  
Photographs, etc., apparatus for casting cylinders for, A. Hamon ..... 757,867  
Photographic printing apparatus, White & Mallison ..... 757,798  
Photographs, rocket apparatus for taking, A. Maul ..... 757,825  
Photoprints, etc., apparatus for removing surplus moisture from, J. Halden ..... 757,456  
Physician's examining and treating couch or table, C. Hazard ..... 757,807  
Piano action, upright, F. Hammerle ..... 757,657  
Piano actions, pianissimo device for grand, A. T. Strauch ..... 757,689  
Piano, mechanical, P. Pomeroy ..... 757,566




**\$40.00 A WEEK.**

Reliable man or woman each county as manager to exhibit, take orders, appoint agents for Harrison Valveless Oil-Gas Stoves. Wonderful invention—batteries others—Automatic—batteries rates fuel gas from kerosene—Miniature gas works—Absolutely safe—Enormous demand—Splendid for summer cooking—Delight customers—Cheap, clean, safe fuel. Gasoline is dangerous. Catalogue Free. Write today. World Mfg. Co., 5687 World Bldg., Cincinnati, O.

**WELL DRILLING Machines**

Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalogue.

WILLIAMS BROS., Ithaca, N. Y.

**Lackawanna Motors**

are Simple and Valveless. Easy to start and easy to operate. For automobiles and launches. 3 to 24 H.P. Cut shows Lackawanna Reversing Device attached to our 6 H. P. marine motor. No reversing gear necessary.

LACKAWANNA MOTOR COMPANY  
51-61 Letchworth St. - - Buffalo, N. Y.

**Send For It To-Day**

You'll find it always convenient to have as a useful and instructive book

Montgomery & Co.'s Tool Catalogue

The new edition has 704 pages and is copiously illustrated. Pocket size 6 1/4 x 4 1/2 ins. Sent by mail for 25c.

MONTGOMERY & CO.,  
105 Fulton St., New York City.


**PALMER MARINE and STATIONARY MOTORS**

2 and 4 CYCLE

are no experiment, as they are in successful operation in all parts of the world.

Launches in stock. Send for Catalogue.

PALMER BROS.,  
Cos. Cob. Conn.  
New York Office, 138 Liberty St.

**Squabs Pay Best Hens**

Easier, need attention only part of time, bring big prices. Raised in one month. Attractive for poultrymen, farmers, women. Send for FREE BOOKLET and learn this immense rich home industry.

PLYMOUTH ROCK SQUAB CO., 289 Atlantic Ave., Boston, Mass.

**The Franklin Gas Engine**

One-Half Horse Power

worth \$100 complete. We sell all necessary castings, materials and detail drawings for \$16.50. For real work—not a toy. 450 revolutions per minute. Upright or horizontal form. Finished parts sold separately. Runs by gas or gasoline. For boys and men with a mechanical turn. Write for circular 9.

PARSELL & WEED  
129-131 West 31st Street, New York.

**RADIUM AND RADIO-ACTIVITY**

The SCIENTIFIC AMERICAN SUPPLEMENT has published the most complete information on the subject of Radium and Radio-activity that has thus far appeared.

The following articles, written by men who have played a prominent part in the discovery of the marvelous properties of radium, should be read by every student of chemistry and physics:

**RADIO-ACTIVITY AND THE ELECTRON THEORY.** By SIR WILLIAM CROOKES. SCIENTIFIC AMERICAN SUPPLEMENT 1402.

**THE RADIO-ACTIVITY OF MATTER.** By PROFESSOR HENRI BECQUEREL. SCIENTIFIC AMERICAN SUPPLEMENT 1379.

**SOME PROPERTIES OF THE RADIO-ACTIVE SUBSTANCES.** By PROFESSOR HENRI BECQUEREL. SCIENTIFIC AMERICAN SUPPLEMENT 1427.

**PRODUCTION OF HELIUM FROM RADIUM.** By SIR WILLIAM RAMSAY. SCIENTIFIC AMERICAN SUPPLEMENT 1444.

**THORIUM: A RADIO-ACTIVE SUBSTANCE WITH THERAPEUTICAL POSSIBILITIES.** By DR. SAMUEL G. TRACY. SCIENTIFIC AMERICAN SUPPLEMENT 1470.

**RADIUM IN MEDICINE.** By DR. SAMUEL G. TRACY. SCIENTIFIC AMERICAN SUPPLEMENT 1455.

**A RESUME OF RECENT SPECIAL STUDIES OF RADIUM AND RADIO-ACTIVITY.** SCIENTIFIC AMERICAN SUPPLEMENTS 1466 and 1471.

**RADIUM AND RADIO-ACTIVE SUBSTANCES.** By WILLIAM J. HAMMER. SCIENTIFIC AMERICAN SUPPLEMENT 1429.

**A COMPLETE MANUAL OF RADIUM TECHNOLOGY,** clearly explaining the methods of obtaining radium, conducting experiments with the substance and measuring its radio-active force will be found in SCIENTIFIC AMERICAN SUPPLEMENTS 1475, 1476, 1477.

These SCIENTIFIC AMERICAN SUPPLEMENTS comprise what may well be considered an admirable text-book on the subject of radio-activity.

Price of Scientific American Supplements TEN CENTS BY MAIL for each number mentioned. Order through your newsdealer or from

MUNN & CO., 361 Broadway, New York

**BICYCLES FOR SALE**

At Prices All Can Pay

9,000 wheels to be sold this month. Factories have gone down with a crash. Dealers are swamped. We are seizing lot after lot for defaulted storage.

5,000 Bicycles, \$12.50, \$15, worth \$25 to \$30.

4,000 Bicycles, \$18 to \$25, worth \$35 to \$50.

Manhattan Racers, \$25. Regular \$30 wheel, with coaster brake.


Second-Hand Bicycles, \$5 up. In this lot are fine police wheels from Philadelphia and Baltimore. Some very slightly used.

98 cents for \$2 Tires. A special sale. An unpaid storage seizure cuts prices. Other tires, \$1.25, \$1.50, \$2.

\$3 Lamps, 68 cents. Great factory clearing sale. \$1 worth of sundries for 40c. See famous bargain windows.

MANHATTAN STORAGE CO.

No. 42 Cortlandt Street, New York, N. Y.

**FLEXIBLE GRIP CHAIN DRIVE.**

CLIMBS ANY HILL. FAST OR SLOW AS YOU WANT TO GO. METZ, WALTHAM, MASS.

Price \$210



Warwick Motor Cycles

New Grip Control. Many other new features. The Best yet. Weight, 30 lbs. Send for catalog.

Warwick Cycle and Automobile Co., Springfield, Mass.

**Patents, Trade Marks, COPYRIGHTS, etc.,**

Address MUNN & CO., Solicitors of Patents.

Office of the SCIENTIFIC AMERICAN

361 Broadway, New York.

Branch Office, 625 F St., Washington, D. C.

Hand-book Sent Free on Application.

**The Hygrophant**

shows with accuracy and without computation the temperature and degree of humidity. Send for circular

J. S. F. HUDDLESTON

20 Devonshire St., Boston

**Get Rid of Boiler Scale**

and save hundreds of dollars every year by using the wonderful Dean Boiler Tube Cleaner. It will cost



you nothing to make a thorough trial of this cleaner, as we will be pleased to send you one for a free trial. Write to-day for details of our offer.

WM. B. PIERCE CO.

319 Washington Street, Buffalo, N. Y.

**HOW TO MAKE AN ELECTRICAL**

Furnace for Amateur's Use.—The utilization of 110 volt electric circuits for small furnace work. By N. Monroe Hopkins. This valuable article is accompanied by detailed working drawings on a large scale, and the furnace can be made by any amateur who is versed in the use of tools. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 1452. Price 10 cents. For sale by MUNN & CO., 361 Broadway, New York City, or by any bookseller or newsdealer

**Automatic Machines FOR FORMING WIRE**

from coil into shapes similar to cuts. We can furnish machines or goods, as desired. Send for Catalogue.

BLAKE & JOHNSON, WATERBURY, CONN.

P.O. Box 7,

**A GOOD INVESTMENT**

For \$1.75 we will send by express (not prepaid), complete N. D. Outfit with full instructions for learning TELEGRAPH OPERATING.

A fascinating study that will enable you to earn good wages. Send 25 cents for universal dating stamp, by mail, postpaid. Send for our catalog.

Established 1879.

J. H. BUNNELL & Co., Inc. 20 Park Place New York

**PORTLAND CEMENT MAKING IS**

described in excellent articles contained in SCIENTIFIC AMERICAN SUPPLEMENTS 1433, 1465, 1466. Price 10 cents each, by mail. Munn & Company, 361 Broadway, New York City, and all newsdealers.

**Kerosene Oil Engine**

Nothing but Kerosene Oil to run it

Simple, Safe and Efficient. Needs little attention, is less likely to get out of order, and is cheaper to run than any other engine manufactured. Economical and Easily Operated.

International Power Vehicle Co.

Stamford, Conn.

**Marine Motors**

If you want a Gasoline Motor, with all the good points and none of the bad, buy a "RELIABLE" Either jump or make and break Spark.

Boston Gasoline Engine Co. 134 Broad St., Boston, Mass

|                                                                                                  |         |
|--------------------------------------------------------------------------------------------------|---------|
| Piano player's key striker, J. Courville....                                                     | 757,889 |
| Picture projecting apparatus, slide-feeding device for, Green & Gent.....                        | 757,737 |
| Pile driver, J. H. Hopkins.....                                                                  | 757,926 |
| Pile driving apparatus, H. W. Phillips.....                                                      | 757,960 |
| Pin lock, W. H. Taylor.....                                                                      | 758,026 |
| Pin retainer, J. Evans.....                                                                      | 757,729 |
| Pin tumbler lock, W. H. Taylor.....                                                              | 758,024 |
| Pin tumbler lock key, W. H. Taylor.....                                                          | 758,025 |
| Pipe and nut wrench, combined, G. E. Carnes.....                                                 | 757,861 |
| Pipe coupling, automatic, C. O. Cole.....                                                        | 757,888 |
| Pipe or bar cutter, W. T. Snell.....                                                             | 757,975 |
| Planer, E. Rawson.....                                                                           | 757,963 |
| Planter and fertilizer distributor, seed, J. D. Kinney.....                                      | 757,813 |
| Plaster of Paris, manufacture of, W. Brothers.....                                               | 757,649 |
| Plate box, H. D. & R. C. Bickford.....                                                           | 757,540 |
| Plow, F. Dinwiddle.....                                                                          | 757,443 |
| Plow, O. C. Babcock.....                                                                         | 757,539 |
| Plow, F. Wiencek.....                                                                            | 757,855 |
| Plow and planter, lister, C. R. Davis.....                                                       | 757,998 |
| Plow and planter, sulky lister, C. R. Davis.....                                                 | 758,000 |
| Plow, sulky, C. R. Davis.....                                                                    | 757,996 |
| Plow, sulky lister, C. R. Davis.....                                                             | 757,994 |
| Pocketbook, L. M. Brown.....                                                                     | 757,879 |
| Pocketbook, O. A. Lehman.....                                                                    | 757,755 |
| Polishing machine, D. McCance.....                                                               | 757,763 |
| Power and motion, mechanism for transmitting and controlling, W. H. Kessler.....                 | 757,751 |
| Power transmitter, J. Coates.....                                                                | 757,599 |
| Press, G. B. Rowe.....                                                                           | 757,501 |
| Pressure, controlling device for maintaining steady, T. P. Ford.....                             | 757,903 |
| Pressure regulator, B. Zindel.....                                                               | 757,590 |
| Printing press, F. J. Herdle.....                                                                | 757,460 |
| Printing press, D. H. Saunders.....                                                              | 757,967 |
| Printing press, platen, J. Hein.....                                                             | 757,458 |
| Printing rollers, means for securing impression surfaces to, F. J. Herdle.....                   | 757,461 |
| Protractor and its accompaniments, J. H. Renshaw.....                                            | 757,568 |
| Pulley driving mechanism, L. J. Daily.....                                                       | 757,891 |
| Pulp, beating engine, J. White.....                                                              | 757,585 |
| Pulverizing machine, Schoellhorn & Albrecht.....                                                 | 757,969 |
| Pump, ship, Sanborn & Rannels.....                                                               | 758,022 |
| Pumping apparatus, oil, C. Robinson.....                                                         | 757,499 |
| Push button switch, W. A. Church.....                                                            | 757,541 |
| Rack. See display rack.....                                                                      | 757,936 |
| Rail joint, M. Loppich.....                                                                      | 757,984 |
| Rail joint, M. Warner.....                                                                       | 758,018 |
| Railway chair, F. W. Pool.....                                                                   | 757,906 |
| Railway electric, G. H. Fretts.....                                                              | 757,754 |
| Railway rail stay, Laas & Sporenburg.....                                                        | 757,537 |
| Railway signaling, electric, S. M. Young.....                                                    | 757,711 |
| Railway trains at danger signals, means for stopping, W. L. Adamson.....                         | 757,931 |
| Railway wagon, J. T. Jepson.....                                                                 | 757,650 |
| Rails, means for cleaning the third rails of electrical, W. Chausse.....                         | 757,795 |
| Rake, O. M. Walker.....                                                                          | 757,878 |
| Ratchet wrench, G. Brauer.....                                                                   | 757,656 |
| Razor, J. Guinan.....                                                                            | 757,655 |
| Razor guard, J. Guinan.....                                                                      | 757,433 |
| Reducing mill, H. W. Becht.....                                                                  | 757,821 |
| Refractory material, basic, A. T. Macfarlane.....                                                | 757,911 |
| Refrigerator, R. R. Graf.....                                                                    | 757,581 |
| Refrigerator car air agitator, H. A. Turner.....                                                 | 757,598 |
| Reins, driving, G. H. Carlin.....                                                                | 757,946 |
| Resawing machine, T. J. Mitchell.....                                                            | 757,687 |
| Rheostat, I. E. Storey.....                                                                      | 757,880 |
| Rheostat, electric, R. W. Brown.....                                                             | 757,447 |
| Rocking chair with air apparatus, M. Friedman.....                                               | 757,487 |
| Roller coaster, G. A. McLaughlin.....                                                            | 757,432 |
| Rolling machine, wheel, F. P. Bates.....                                                         | 757,455 |
| Rotary engine, A. Guindon.....                                                                   | 757,894 |
| Rotary engine, J. S. Davis.....                                                                  | 757,675 |
| Rulers, manufacture of, H. E. Peucker.....                                                       | 757,700 |
| Safety pin, F. Westpfal.....                                                                     | 757,474 |
| Sail, spinner, G. A. Lowry.....                                                                  | 757,913 |
| Sale recorder, D. Griffith.....                                                                  | 757,947 |
| Sand box gage, T. E. Mooney.....                                                                 | 757,856 |
| Sash lock, W. C. Wilde.....                                                                      | 757,740 |
| Saw cover, W. C. Happe.....                                                                      | 757,663 |
| Saw filing machine, N. Kall.....                                                                 | 757,770 |
| Saw, portable crosscut, F. Richter.....                                                          | 757,953 |
| Saw tooth for metal saws, insertible, C. C. Newton.....                                          | 757,626 |
| Sawing logs, etc., electrically-driven machine for, K. Kottmann.....                             | 757,745 |
| Sawing machine, J. A. House.....                                                                 | 757,833 |
| Sculptor's copying machine, R. T. Paine.....                                                     | 757,814 |
| Seal lock, J. D. C. Knapp.....                                                                   | 757,574 |
| Sealing envelopes and mailable matter and affixing stamps thereto, machine for, J. N. Stacy..... | 757,446 |
| Secondary battery, L. H. Flanders.....                                                           | 757,645 |
| Seedbox, R. Bassett.....                                                                         | 757,722 |
| Semaphore, electric, D. Boisvert.....                                                            | 757,966 |
| Sewing machine, corset, S. Royle.....                                                            | 757,900 |
| Sewing machine illuminator, P. Englund.....                                                      | 757,629 |
| Sewing machine motor, J. H. Macon, Jr.....                                                       | 757,723 |
| Sewing machine rotary fan attachment, H. W. C. von Castens.....                                  | 757,725 |
| Sewing machine shuttle actuating mechanism, G. L. Coreoran.....                                  | 757,463 |
| Sewing machine thread cutting device, J. T. Hogan.....                                           | 757,735 |
| Shaft coupling, W. R. George.....                                                                | 757,932 |
| Shaft fastener, W. A. Jones.....                                                                 | 757,859 |
| Shaft support and anti-rattler, combined, J. C. Bridgman.....                                    | 757,823 |
| Sharpening attachment for band cutters and feeders, J. Manderson.....                            | 757,429 |
| Shearing tool, S. Arce.....                                                                      | 757,560 |
| Sheet cutting machine, M. Meriam.....                                                            | 758,003 |
| Sheet mill adjusting mechanism, S. B. Ely et al.....                                             | 757,816 |
| Shoe, ankle supporting, G. Krieger.....                                                          | 757,495 |
| Shoe, electric sole, A. Reed.....                                                                | 757,783 |
| Shovels, making, F. Skelton.....                                                                 | 757,705 |
| Shredding machine or the like, M. F. Will.....                                                   | 758,032 |
| Sifter, ash, J. P. Hill.....                                                                     | 757,768 |
| Signal apparatus, J. D. Price.....                                                               | 757,871 |
| Sink overflow device, Akers & Ross.....                                                          | 757,948 |
| Sizing, A. Muller-Jacobs.....                                                                    | 757,756 |
| Skirt and waist holder, combined, M. Little-Pritzkow.....                                        | 757,672 |
| Skirt supporter, A. M. Ott.....                                                                  | 757,562 |
| Slotting machine, M. & H. E. Morton.....                                                         | 757,546 |
| Smoke conveyor, W. L. Gale.....                                                                  | 757,760 |
| Smokers' articles, mouthpiece or stem for, J. A. Manahan.....                                    | 757,638 |
| Soap holder, J. S. Roake.....                                                                    | 757,670 |
| Soldering iron, electrically heated, A. C. McCloskey.....                                        | 757,748 |
| Spinning ring, H. P. Hoyle.....                                                                  | 757,797 |
| Spirometer, A. E. Wells.....                                                                     | 757,781 |
| Spring, See Wagon spring.....                                                                    | 757,624 |
| Spring controller, coil, T. A. Shea.....                                                         | 757,778 |
| Stacker, hay, J. W. Kenworthy.....                                                               | 757,973 |
| Starch by centrifugal action, separating, R. Schrader.....                                       | 757,452 |
| Stay bolt, D. L. Shaffer.....                                                                    | 757,750 |
| Steam engine, L. Goos, Jr.....                                                                   | 757,625 |
| Steam engine, F. P. Hummel.....                                                                  | 757,639 |
| Steam generator, Kitchen & Perkins.....                                                          | 757,694 |
| Steam generator, G. L. Rose.....                                                                 | 757,803 |
| Steam trap, automatic, J. M. Towne.....                                                          | 757,438 |
| Steel treating and manufacturing, W. B. Burrow.....                                              | 757,483 |
| Stenciling, Burdick & Pervilnac.....                                                             | 757,943 |
| Stone, manufacturing, J. C. McClenahan.....                                                      | 758,015 |
| Storage battery, A. V. Meserole.....                                                             | 757,742 |
| Stove, camp, D. L. Miller.....                                                                   | 757,703 |
| Stove for heating smoothing irons, etc., W. Hegemann.....                                        | 757,602 |
| Stove igniter, oil, W. H. Wilder.....                                                            | 757,876 |
| Stove or furnace, heating, R. W. Dodge.....                                                      | 757,595 |
| Stove, wickless blue flame oil, A. J. Blackford.....                                             | 757,575 |
| Strip delivering apparatus, G. Norwood.....                                                      | 757,570 |
| Sulky, G. W. S. Clair.....                                                                       | 757,899 |
| Superheater, J. P. Sneddon.....                                                                  | 757,866 |
| Suspenders and belt, combined, S. L. Engel.....                                                  | 757,854 |
| Swingletree or doubletree, E. Halman.....                                                        | 757,712 |
| Syringe, H. M. Guild.....                                                                        | 758,017 |
| Table leg attachment, J. F. Arnold.....                                                          | 757,908 |
| Tack claw, G. C. Parish.....                                                                     | 757,794 |
| Tally device, L. L. Frost.....                                                                   | 757,785 |
| Tap bottle, E. Walker.....                                                                       | 757,504 |
| Telegraph switchboard spring jack, J. F. Skirrow.....                                            | 757,559 |
| Telegraph system, H. O. Rugh.....                                                                |         |
| Telegraph system, wireless, G. Marconi.....                                                      |         |

**WITTE GASENGINES**

The highest type of self-contained engines on any commercial, gas or liquid fuel. Now sold on 30 Days' Free Trial. Very sensitive governor; perfect electric igniter; other exclusive essentials. Result of 30 years' experience. Write for Catalogue E. WITTE IRON WORKS CO., 617 W. 5th Street, Kansas City, Mo.

**TAKE THE NICKEL PLATE ROAD FOR THE ST. LOUIS FAIR.**

Lowest Rates and many unusual privileges. Special \$15.00 rate on certain dates. Full information on application to local Agents, or R. E. Payne, General Agent, 291 Main St., Buffalo, N. Y., or A. W. Ecclestone, D.P.A., 385 Broadway, New York.

**The APPLE Ignition**

Saves battery troubles, attached to any gas engine. Governors, Storage and Dry Batteries, Spark Cords, Plugs, Switches, Automatic Timing Devices.

The Dayton Electrical Mfg. Co.

98 Reibold Bldg., DAYTON, O.

**ELECTRIC LAUNCH MOTOR.—THE**

design in this paper is for a motor of unusual simplicity of construction, which can easily be built by an amateur at small cost. It is intended for a boat of about 24 feet over all and 4 feet 6 inches beam, drawing 18 inches, and is capable of propelling such craft at a speed of 7 miles per hour. Illustrated with 21 cuts. See SCIENTIFIC AMERICAN SUPPLEMENT, No. 1202. Price 10 cents by mail, from this office, and from all newsdealers.

**Vaccination and Life Insurance**

are alike in one particular: Vaccination makes a man immune from smallpox, life insurance makes his family immune from poverty.

Can you spare five minutes to read our little booklet, "The How and the Why"? We will gladly mail you a copy.

PENN MUTUAL LIFE INS. CO.

PHILADELPHIA

**"The Sharer"**

A new foot power that can be applied to all light machinery. A kick starts the machine and an occasional kick keeps it going. Send for our Booklet.

SLOTKIN & PRAGLIN,

210A Canal St., New York.

**ELECTRIC SEWING MACHINE MO-**

tor.—The instructions and numerous illustrations of details contained in this article will enable any mechanic of average ability to build an efficient motor that will operate a sewing machine. The cost of materials for this machine should not exceed five dollars. See SCIENTIFIC AMERICAN SUPPLEMENT, No. 1210. Price 10 cents by mail, from this office and from all newsdealers.

NOW READY! A HALF PRICE EDITION

# Appletons' Cyclopedia of Applied Mechanics

Each Volume 10x7x2. Weight 20 lbs.

Edited by PARK BENJAMIN, Ph.D., LL.B.

A Magnificent Set in Three Vols. Fully Illustrated

Handsomely bound in half morocco, each volume containing over 900 pages, with nearly 8,000 engravings.

**SPECIAL PRICE \$12.00**

Heretofore the publishers' price of this work has never been less than \$22.50 in the cheapest binding and it has been sold only by subscription. We have secured a special edition of this valuable work, and will box and ship, prepaid, the three volumes to any address in the United States or Canada on receipt of the above price. By purchasing now from us you save half the original price and have in return a technical cyclopedia and dictionary, the great usefulness of which has been testified to by nearly one hundred thousand purchasers of this valuable work—technicians and mechanics who refuse to estimate its value to them in their work by mere dollars and cents.

AS A REFERENCE WORK IT IS WITHOUT A PEER!

Containing upwards of 10,000 topics, 2,700 pages, nearly 8,000 engravings. It is the recognized standard of American mechanical practice in workshops, manufacturing, technical schools, and libraries all over the United States. There is not a machinist, engineer, electrician, business manager or foreman who can afford to be without the information contained in these volumes. You are doing yourself an injustice if you don't take advantage of our offer and send for these volumes at once.

Add \$1 extra for expressage to England and the Continent, or \$2 extra to Australia and other countries.

Special circular of contents of these volumes sent free. Our 40-page catalogue sent FREE on request.

**THE NORMAN C. HENLEY PUBLISHING COMPANY**  
132 Nassau Street, New York, U. S. A.

## LEVIATHAN vs. LEATHER

## DRIVING BELTS

EVIDENCE SUBMITTED:  
TESTIMONY OF A CEMENT MANUFACTURER.

"We did not expect the 30-inch belt would do the business, as it was taking the place of a 36-inch double leather, and we bought the 30-inch to put on top of the 36-inch leather. Finally the 36-inch leather gave out, and, as I said before, we kept right on with the 30-inch Leviathan, and the beauty of it is, we have no use for the idler, the 30 inch running comparatively slack and transmitting nearly 500 horse power."

Further evidence as to what is done with Leviathan Belting, particularly under severe conditions, as exposure to water, oil, weather, or extreme heat, is ready for the asking.


It will pay you to ask.

MAIN BELTING COMPANY,

1223 CARPENTER STREET,  
CHICAGO

BOSTON

NEW YORK

PHILADELPHIA  
BUFFALO

### A BRAKE IS "THE JEWEL" OF BICYCLE MECHANISM

It is simply lawlessness to life and apparatus not to take advantage of the new principle applied in the new 1904

MORROW BRAKE

The Morrow avoids all troubles by employing but one clutch. Send for a catalogue and learn the recommended features of this perfect device. PRICE, \$5. ECLIPSE MACHINE CO., Elmira, N. Y.

## Steel Castings for Special Purposes

Our complete facilities enable us to undertake the manufacture of high grade steel castings for almost any purpose. Write us for particulars. Open Hearth Steel Castings for locomotives, ship building, electrical, pump and general machinery purposes. Subject to U. S. Government, Lloyd's, Railroad and other specifications. RAIL OR WATER DELIVERIES.

SEABOARD STEEL CASTING CO., Chester, Pa.



## POCONO MOUNTAINS



For an ideal outing this Summer. The region is high, the climate invigorating and the trip comfortably made in three and one-half hours from New York. A handsomely illustrated book of 128 pages, containing complete information about hotels and boarding-houses, together with a delightful love story entitled "A Chance Courtship," will be mailed on receipt of 10 cents in stamps.

Address T. W. LEE, General Passenger Agent, New York City.

|                                                                                                      |         |
|------------------------------------------------------------------------------------------------------|---------|
| Telegraphy, H. O. Rugh.....                                                                          | 757,505 |
| Telegraphy, apparatus employed in wireless, J. A. Fleming.....                                       | 758,005 |
| Telegraphy, device for wireless, J. A. Fleming.....                                                  | 758,004 |
| Telegraphy, multiplex, J. J. Ghegan.....                                                             | 757,736 |
| Telegraphy, wireless, F. J. Green.....                                                               | 758,006 |
| Telephone apparatus, electrical, P. H. Fisk.....                                                     | 757,609 |
| Telephone desk set, H. P. Clausen.....                                                               | 758,031 |
| Telephone transmitter, W. L. Wilhelm.....                                                            | 757,799 |
| Telephony, A. Meinema.....                                                                           | 757,826 |
| Tent cottage, A. M. Holmes.....                                                                      | 758,033 |
| Thermal cut-out, H. P. Clausen.....                                                                  | 757,884 |
| Thermal cut-out, M. Setter.....                                                                      | 757,971 |
| Thresher and separator, combined grain, F. Fredeen.....                                              | 757,904 |
| Ticket issuing machine, J. M. Siebler.....                                                           | 758,023 |
| Tie plate, W. S. Jones.....                                                                          | 757,467 |
| Tiling substitute, E. Reizenstein.....                                                               | 757,840 |
| Tire filler, vehicle, C. D. Nirdlinger.....                                                          | 757,631 |
| Tire protector, J. L. Brown.....                                                                     | 758,029 |
| Tire tightener, C. T. Umsted.....                                                                    | 757,697 |
| Tire, vehicle, A. C. Hills.....                                                                      | 757,923 |
| Toilet table and traveling trunk combined, lady's, A. L. Jacob.....                                  | 757,661 |
| Too-great speed alarm, G. Rouaix.....                                                                | 757,640 |
| Tool hanger, E. B. Wiles.....                                                                        | 757,987 |
| Tool, pneumatic, W. T. Sears.....                                                                    | 757,970 |
| Top roll saddle, E. Dixon.....                                                                       | 757,727 |
| Tow, J. J. Quinlan.....                                                                              | 757,567 |
| Toy, mechanical, Patten & Lippy.....                                                                 | 757,834 |
| Traction engine, F. C. Watson.....                                                                   | 757,985 |
| Trap, See Steam trap.....                                                                            |         |
| Traveling case, W. T. Richards.....                                                                  | 758,019 |
| Trench digger, J. Helm.....                                                                          | 757,459 |
| Tripod, folding, R. P. Palmer.....                                                                   | 757,766 |
| Trolley, C. E. Smith.....                                                                            | 757,786 |
| Trolley base, P. S. Martin.....                                                                      | 757,824 |
| Trolley pole safety device, P. McCullough, et al.....                                                | 757,630 |
| Truck for rolling stock, bogie, H. A. Hoy.....                                                       | 757,927 |
| Truck frames, device for lifting railway, W. Schott.....                                             | 757,507 |
| Truck, lateral motion car, E. C. Washburn.....                                                       | 757,852 |
| Trucks, adjustable hook for hand, G. M. Vickers, Jr.....                                             | 757,793 |
| Trunk, J. A. H. Villmow.....                                                                         | 757,528 |
| Tube bending machine, G. F. Atwood.....                                                              | 757,593 |
| Tubes, bending, G. F. Atwood.....                                                                    | 757,592 |
| Tug, thill, J. S. Bean.....                                                                          | 757,717 |
| Typewriting machine, W. J. Barron.....                                                               | 757,431 |
| Typewriting machine, R. W. Uhlig.....                                                                | 757,982 |
| Universal joint, E. J. Reece.....                                                                    | 757,769 |
| Valve, E. P. Allen.....                                                                              | 757,873 |
| Valve, faucet, E. F. Field.....                                                                      | 757,731 |
| Valve, flush, E. A. Marsh.....                                                                       | 758,012 |
| Valve for safety train stops, air, H. G. Sedgwick.....                                               | 757,571 |
| Valve gear, explosive engine, L. T. & C. Hagan.....                                                  | 757,917 |
| Valve mechanism, H. R. Mason.....                                                                    | 757,479 |
| Valve, reducing, J. J. Burke.....                                                                    | 757,881 |
| Valve, throttle, R. A. McKee.....                                                                    | 757,486 |
| Vehicle body hanger, H. Jones.....                                                                   | 757,623 |
| Vehicle brake, H. P. Maxim.....                                                                      | 757,940 |
| Vehicle lamp holder attachment, A. Groff.....                                                        | 757,914 |
| Vehicle running gear, C. P. Malcolm.....                                                             | 757,476 |
| Vehicle running gear, motor, H. P. Maxim.....                                                        | 757,941 |
| Vehicle, steam-propelled, H. K. Hess.....                                                            | 757,808 |
| Vehicle wheel, J. A. Polk.....                                                                       | 757,677 |
| Vending apparatus, R. E. Payne.....                                                                  | 757,956 |
| Vending machine, Coleman & Shepard.....                                                              | 757,993 |
| Vending machine, F. G. Hartell.....                                                                  | 758,007 |
| Ventilator, S. H. Jacobson.....                                                                      | 757,465 |
| Ventilator, C. A. Withers.....                                                                       | 757,534 |
| Vessels, apparatus for scraping ore from wings of, M. Andrews.....                                   | 757,858 |
| Vessels, self-grip and draw-off attachment for, L. E. Saunders.....                                  | 757,641 |
| Vise, H. S. Hanstine.....                                                                            | 757,918 |
| Wagon brake, N. Pfeffer.....                                                                         | 757,959 |
| Wagon spring, C. L. Thomas.....                                                                      | 757,578 |
| Walking stick and stool, combination, N. F. Russell.....                                             | 757,776 |
| Warping machine, F. Ott.....                                                                         | 757,491 |
| Washing machine, J. W. Montgomery.....                                                               | 757,829 |
| Washing machine, C. Dietz.....                                                                       | 757,896 |
| Water, apparatus for separating oil and grease from, E. Friesdorf.....                               | 757,448 |
| Water closet tank valves, mechanism for operating, P. J. Gross.....                                  | 757,738 |
| Water heater, E. E. Murphy.....                                                                      | 757,563 |
| Wave responsive device, Woodward & Shoemaker.....                                                    | 757,802 |
| Wax applying roll or brush, W. A. Reed.....                                                          | 757,496 |
| Weeder, wheel, C. Wear.....                                                                          | 757,796 |
| Welding steel plates, etc., to sheets of aluminum and aluminum-plated other metals, H. Wachwitz..... | 757,582 |
| Wheel traction band, L. Kniffen.....                                                                 | 757,471 |
| Wheel tread, traction, J. W. Fridmore.....                                                           | 757,635 |
| Wind motor, J. J. Williams.....                                                                      | 757,800 |
| Winding or hoisting drum, H. F. James.....                                                           | 757,622 |
| Windlass, G. W. Menefee.....                                                                         | 757,668 |
| Window, J. Frye.....                                                                                 | 757,865 |
| Window screen, Stout & Turner.....                                                                   | 757,688 |
| Window screen, extension, G. W. Rockwell.....                                                        | 758,021 |
| Wire drawing machine, D. J. McMahon.....                                                             | 757,671 |
| Wire stretcher, P. O. Daughters.....                                                                 | 757,893 |
| Wrench, G. A. Andrus.....                                                                            | 757,644 |
| Wrench, E. Howell.....                                                                               | 757,747 |
| Wrench, J. N. Noyer.....                                                                             | 757,704 |
| Wrench, W. H. W. Beebe.....                                                                          | 758,035 |
| Yoke center, neck, J. E. Beebe.....                                                                  | 757,594 |

### DESIGNS.

|                                                                   |        |
|-------------------------------------------------------------------|--------|
| Bath tub, C. Weelans.....                                         | 36,881 |
| Collar or similar article, A. Schweriner.....                     | 36,884 |
| Hammock body, I. E. Palmer.....                                   | 36,885 |
| Lavatory, C. Weelans.....                                         | 36,882 |
| Spoons, forks, or similar articles, handle for, G. P. Tilton..... | 36,879 |
| Stove, P. H. Ficken.....                                          | 36,883 |
| Toy bank, A. C. Williams.....                                     | 36,880 |

### TRADE MARKS.

|                                                                                     |        |
|-------------------------------------------------------------------------------------|--------|
| Absinthe, O. L. Pernod.....                                                         | 42,402 |
| Asthma compound for the cure of, Williams & Cole.....                               | 42,445 |
| Axle grease, W. N. Ley.....                                                         | 42,412 |
| Baths, chemical preparations for sulphur, Chemische Fabrik Vecheide A. G.....       | 42,422 |
| Bearings for machines, journal and shaft, D. E. Kempster.....                       | 42,464 |
| Bearings for sheaves, D. E. Kempster.....                                           | 42,463 |
| Beer, lager, Cumberland Brewing Co. of Allegheny County.....                        | 42,441 |
| Boots and shoes, leather, P. W. Minor & Son.....                                    | 42,395 |
| Boots and shoes, leather, George E. Keith Co.....                                   | 42,436 |
| Bread, J. E. Blackburn.....                                                         | 42,408 |
| Bread, biscuits, and cakes made from bananas, W. A. Jones.....                      | 42,409 |
| Cement, Portland, Empire Portland Cement Co.....                                    | 42,453 |
| Coffee, Direct Coffee Co.....                                                       | 42,403 |
| Corset bones, J. Janowitz.....                                                      | 42,430 |
| Corsets, Birdsey & Somers.....                                                      | 42,392 |
| Cuff holders, H. C. Frank.....                                                      | 42,426 |
| Dress goods, certain named, Joy, Langdon & Co.....                                  | 42,431 |
| Fabrics, certain named woven, Hodges Fiber Carpet Co.....                           | 42,393 |
| Fish hooks and fishing tackle, Henry Millward & Sons.....                           | 42,458 |
| Flax fiber products for certain named purposes, Union Fiber Co.....                 | 42,432 |
| Flour, wheat, Royal Milling Company.....                                            | 42,405 |
| Food for animals, Shamrock Stock Food Co.....                                       | 42,437 |
| Food preparations, artificial, Chemische Fabrik von Heyden, Aktiengesellschaft..... | 42,410 |
| Gages, pressure and vacuum, Standard Gage Manufacturing Company.....                | 42,396 |
| Hair tonic, A. Koppelberger.....                                                    | 42,444 |
| Hardware, carriage makers', H. D. Smith & Co.....                                   | 42,398 |
| Laces, shoe, T. Einstein.....                                                       | 42,435 |
| Leather goods, polishes for, Whittemore Bros. & Co.....                             | 42,411 |
| Leather, upper, Victor R. F. Walker Co.....                                         | 42,394 |
| Malt liquors, certain named, Barclay, Perkins & Co.....                             | 42,439 |

All over the civilized world

**THE IMPROVED**

# BOSTON GARTER

IS KNOWN and WORN  
Every Pair Warranted

The Name is stamped on every loop—

*The Velvet Grip*

**CUSHION BUTTON CLASP**

Lies flat to the leg—never Slips, Tears nor Unfastens

**ALWAYS EASY**

Send 50c. for Silk, 25c. for Cotton, Sample Pair.

Geo. Frost Co., Makers, Boston, Mass., U. S. A.

**REFUSE ALL SUBSTITUTES**

**SENSITIVE LABORATORY BALANCE.**  
By N. Monroe Hopkins. This "built-up" laboratory balance will weigh up to one pound and will turn with a quarter of a postage stamp. The balance can be made by any amateur skilled in the use of tools, and it will work as well as a \$125 balance. The article is accompanied by detailed working drawings showing various stages of the work. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 1184. Price 10 cents. For sale by MUNN & Co., 136 Broadway, New York City, or any bookseller or newsdealer.

**"Globe"**

**GASOLINE**

**Marine Engines**

Improved. Simple. Reliable, Economical, Substantial. Prices Right. Guaranteed. Write for Catalogue. Built by....

PENNSYLVANIA IRON WORKS CO., Philadelphia, Pa. and 136 Liberty St., New York, U. S. A.

**MENNEN'S BORATED TALCUM**

# TOILET POWDER

A Positive Relief For PRICKLY HEAT, CHAFING, and SUNBURN, and all afflictions of the skin.

Removes all odor of perspiration. De-lightful after Shaving. Sold everywhere, or mailed on receipt of 25c. Get Mennen's (the original). Sample Free.

GERHARD MENNEN COMPANY, Newark, N.J.

**MECHANICALLY FASTENED**

# Fisk Tires

Stay on the Rim when in use, but can be detached by a novice. Get a catalogue describing it.

**FISK RUBBER COMPANY**  
Chicopee Falls, Mass.

BRANCHES AND REPAIR DEPOTS: Boston, Springfield, New York, Philadelphia, Washington, Syracuse, Buffalo, Detroit, Omaha, Chicago, St. Louis, Minneapolis, Denver, San Francisco, Los Angeles, London, Eng.

**KLIP-KLIP**

# THE POCKET MANICURE

**COSTS 25 CENTS LASTS 25 YEARS**

Solid German Silver. Trims, Files and Cleans the nails with either hand. Don't take imitations. Sold everywhere or by mail for 25c. Money back if you want it. Manicure Book, "A Handy Hand Book of the Hands"—complete instruction on the care of the hands and nails. Sent for two 2c. stamps.

**Klip-Klip Co., 556 Clinton Ave. S., Rochester, N. Y.**

**Trade Mark**

**ORDER BY MAIL**

**The Famous Hosiery**  
Which is Superior to All Others FOR WEAR.

Send Postal for Illustrated Booklet 10c. extra for Mailing Each Three Pairs

**Men's Women's and Children's**

# Never Surrender Hosiery

**ALL WEIGHTS AND KINDS COTTON OR LISLE THREAD**

Order for the entire family

For 62 years the Leading Dry Goods Store of Worcester

**BARNARD, SUMNER & PUTNAM CO.**  
Worcester, Mass.



Founded by Mathew Carey, 1785.  
A House in touch with Three Centuries.  
**HENRY CAREY BAIRD & CO.,**  
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS  
810 Walnut St., Philadelphia, Pa., U.S.A.


Our New and Revised Catalogue of Practical and Scientific Books, 94 pages, 800: a Catalogue of Books on Metallurgy, Mining, Prospecting, Mineralogy, Geology, Assaying, Analysis, etc.; a Catalogue of Books on Steam and the Steam Engine, Machinery, etc.; a Catalogue of Books on Sanitary Science, Gas Fitting, Plumbing, etc., and our other Catalogues and Circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to anyone in any part of the world who will furnish his address.

## ELECTRICAL ENGINEERING TAUGHT BY MAIL.

Write for our Free Illustrated Book.  
"CAN I BECOME AN ELECTRICAL ENGINEER?"  
We teach Electrical Engineering, Electric Lighting, Electric Railways, Mechanical Engineering, Steam Engineering, Mechanical Drawing, at your home by mail. Institute endorsed by Thos. A. Edison and other.  
**ELECTRICAL ENGINEER INSTITUTE,**  
240-242 W. 23d St. New York, Dept. A.

## TYPEWRITER HEADQUARTERS

332 Broadway, New York, sell all makes under half-price. Don't buy before sending for samples of writings, prices, exchange and unprejudiced advice. Immense stock for selection. Shipped for trial. Guaranteed first-class condition. Dealers supplied.



A splendid fit across shoulders, chest—everywhere.  
**MODEL SHIRTS**  
combine the style, comfort and choice of fabric secured in "made-to-order shirts," with the price of ready made shirts.  
LOOK FOR THIS MARK. ASK YOUR DEALER.  
Try our coat shirts. Write to-day for our booklet—All about good shirts and the style to wear on certain occasions.  
Model Shirt Co., 30 Century Bldg., Indianapolis, Ind.

**HIGHEST GRADE GREY IRON CASTINGS**  
For Gasoline Engines and Cylinders  
All kinds of Automobile Castings.  
**FRONTIER IRON WORKS, 2 Auburn Ave., Buffalo, N. Y.**

## STIMULATION without IRRITATION Means New Life to the Scalp.

The Evans Vacuum Cap gives the scalp a thorough massage and encourages a free and healthy circulation without rubbing and without the use of drugs or irritants. It will stop hair from falling out and restore a normal growth where live follicles exist. The Cap is used about ten minutes twice a day and its effects are pleasant from the very beginning. We will refund your money in full if results are not satisfactory after a thirty days' use. Call on or address  
**EVANS VACUUM CAP CO.,**  
St. Louis Office, Fulton Building, New York Office, 1200 Broadway.



TAKE NO SUBSTITUTE. A Dated Guarantee Tag on Each Tire. Protects you against Old Stock.  
**ALLIGATOR PUNCTURE-PROOF-SELF-REPAIRING BICYCLE TIRES.**  
The ORIGINAL, and only Puncture-proof and Self-healing Tire made. Nails, tacks, and glass will not let the air out. Positively will not become porous. Strong, durable, resilient. Greatest thickness where needed (see G in illustration). Examine—feel of it. "I" Sent C.O.D. anywhere, subject to examination—no deposit asked; but we pay express only when cash accompanies order. State diameter of rim and size tire wanted. CATALOG FREE. State and Lake Sts.  
**THE VIM COMPANY, Sole Manufacturers, CHICAGO.**  
Mention Scientific American

Send for this Book  
**THE LUXURY OF A BATH**  
If you want  
**Hot Water**  
instantly, anytime, anywhere.  
It tells of the cheapest and most convenient way to secure hot water and plenty of it, summer or winter, in bath room, laundry, kitchen, etc., by using the  
**Humphrey Crescent Instantaneous Water Heater**  
Sold by all Plumbers.  
This heater is handsome in appearance, occupies little space, is easily and quickly installed and lasts a lifetime. Gas is the fuel and less is required than in any other heater giving equal service. Hot water flows the moment the gas is lighted. 50,000 in use. Price \$16 to \$45, depending upon size. Sent on 30 days trial.  
**Humphrey Co., Dept. L, Kalamazoo, Mich.**

|                                                                                               |        |
|-----------------------------------------------------------------------------------------------|--------|
| Medical pastes and salves, Wollwascherel u. Kammerel Dohren bei Hannover.....                 | 42,421 |
| Medical preparation for the treatment of certain named diseases, liquid, Asmo Remedy Co. .... | 42,417 |
| Medicated salt, Bourland & Stevens Bros. ....                                                 | 42,414 |
| Medicinal and food compounds, certain named, C. F. Boehringer & Soehne, L. ....               | 42,452 |
| Medicinal preparations, certain named, L. D. Gardner ..... ..                                 | 42,450 |
| Medicine, certain named, L. W. Leithead Drug Co. ....                                         | 42,447 |
| Medicine for the cure of certain named diseases, Duluth Medicine Co. ....                     | 42,446 |
| Mineral water, H. F. Schelker.....                                                            | 42,400 |
| Needles and pins, bodkins, and crochet hooks, certain named, Henry Milward & Sons ..... ..    | 42,459 |
| Nut crackers, J. E. Hamilton.....                                                             | 42,427 |
| Oil, olive, F. Sanguinetti & Cie. ....                                                        | 42,404 |
| Ointments and ointment bases, Schering & Glatz ..... ..                                       | 42,451 |
| Overgarters, A. E. Little & Co. ....                                                          | 42,434 |
| Paper clips, Cushman & Denison Manufacturing Co. ....                                         | 42,425 |
| Pens, fountain, F. C. Brown.....                                                              | 42,424 |
| Perfumes in solid, liquid, and powdered form, R. Hudnut.....                                  | 42,442 |
| Piano players and self-playing pianos, automatic, Kohler & Campbell.....                      | 42,428 |
| Power transmitting machinery, certain named, Dodge Manufacturing Co. ....                     | 42,462 |
| Printing purposes, synthetic or anilin colors for, C. Jager.....                              | 42,423 |
| Razors, C. F. Elm.....                                                                        | 42,426 |
| Remedies, certain named, Iowa Medicine Co. ....                                               | 42,416 |
| Remedies for the cure of certain diseases, J. A. Monger.....                                  | 42,448 |
| Remedy for a certain named disease, J. Horsch ..... ..                                        | 42,415 |
| Remedy for worms, Internal, Pratt Food Co. ....                                               | 42,449 |
| Rice, Meinrath Brokerage Co. ....                                                             | 42,407 |
| Rock drilling machinery and tools, Ingersoll-Sergeant Drill Co. ....                          | 42,397 |
| Rubber hose and cotton hose, Bowers Rubber Company ..... ..                                   | 42,454 |
| Rye meal, corn meal, pearl and flaked hominy, and grits, Wells-Abbott-Nieman Co. ....         | 42,406 |
| Salves used externally, A. Y. Montz.....                                                      | 42,420 |
| Sewing machines and parts thereof, Illinois Sewing Machine Co. ....                           | 42,429 |
| Skirts for women, Wearwell Skirt Co. ....                                                     | 42,433 |
| Sleeping draft, M. A. Quee.....                                                               | 42,418 |
| Suits for boys, Siegel Cooper Company.....                                                    | 42,430 |
| Syrup of gualacol, Davis Pharmaceutical Co. ....                                              | 42,399 |
| Tobacco and cigarettes made therefrom, smoking, J. & F. Bell, Ltd. ....                       | 42,438 |
| Tobacco, smoking, Wells-Whitehead Tobacco Co. ....                                            | 42,399 |
| Whisky, Belmont Distillery Co. ....                                                           | 42,401 |

### LABELS.

|                                                                                                           |        |
|-----------------------------------------------------------------------------------------------------------|--------|
| "Absorbine," for a veterinary medicine, W. F. Young.....                                                  | 10,986 |
| "Balm of Gilead," for ointment, F. A. Williams ..... ..                                                   | 10,987 |
| "Buster Brown Legging," for leggings, H. Jacob & Son ..... ..                                             | 10,964 |
| "Buster Brown Ring," for rings, E. & J. Bass ..... ..                                                     | 10,965 |
| "Choco," for confectionery, Choco Candy Co. ....                                                          | 10,970 |
| "Domestic Pets," for picture blocks, National Novelty Corporation.....                                    | 10,967 |
| "Dr. Brooks' Faultless Tooth Powder," for tooth powder, D. L. Brooks.....                                 | 10,989 |
| "Egyptian Salve," for salve, W. Wyman.....                                                                | 10,988 |
| "Extra Dry Ginger Ale," for carbonated beverages, American Soda Fountain Co. ....                         | 10,980 |
| "Guaistol (Davis)" for the Only Permanent Sirup of Gualacol," for medicine, Davis Pharmaceutical Co. .... | 10,983 |
| "High Life," for smoking tobacco, R. Harris & Bro. ....                                                   | 10,971 |
| "Honey Dew," for smoking tobacco, R. Harris & Bro. ....                                                   | 10,972 |
| "Ino," for beverage, Ino Company.....                                                                     | 10,979 |
| "King's Stop a Cough," for medicine, California Chemical Co. ....                                         | 10,985 |
| "Life Malt," for malt extract, N. Biever, Jr. ....                                                        | 10,981 |
| "Maltzone," for medicine, M. Carnot.....                                                                  | 10,982 |
| "Orange Drip Syrup" for syrup, S. C. Leonard ..... ..                                                     | 10,976 |
| "Our Dollies," for picture blocks, National Novelty Corporation.....                                      | 10,966 |
| "Pride of Reidsville," for smoking tobacco, R. Harris & Bro. ....                                         | 10,973 |
| "Regal Brand Condensed Milk," for condensed milk, United States Condensed Milk Co. ....                   | 10,975 |
| "Reissmann's A. B. C. Ruler," for rulers, F. Reissmann ..... ..                                           | 10,968 |
| "Reissmann's Perfection Mitre Scale," for rulers, F. Reissmann.....                                       | 10,969 |
| "Setter," for whisky, J. R. Stonebraker & Co. ....                                                        | 10,977 |
| "The Famous Sunbury Creamery Butter," for butter, Sunbury Co-operative Creamery Co. ....                  | 10,974 |
| "The La Grange," for mineral water, W. H. Thomas ..... ..                                                 | 10,978 |
| "X-o Quick Cure," for medicine, A. Crichton ..... ..                                                      | 10,984 |

### PRINTS.

|                                                                                |     |
|--------------------------------------------------------------------------------|-----|
| "An Adler Serge Suit," for men's apparel, David Adler & Sons Clothing Co. .... | 960 |
| "Arabian Chocolates," for candy, Gray Litho Co. ....                           | 965 |
| "Arcadian Chocolates," for candy, Gray Lithograph Co. ....                     | 972 |
| "Attractive Summer Footwear for Women," for shoes, O. McCormick.....           | 961 |
| "Duchess Chocolates," for candy, Gray Lithograph Co. ....                      | 974 |
| "Finest Chocolates," for candy, Gray Lithograph Co. ....                       | 973 |
| "Harriet Hubbard Ayer's Face Cream," for face cream, H. A. Seymour.....        | 962 |
| "Kleannwell Tingle Sponge," for rubber sponges, A. H. Smith.....               | 964 |
| "Little Tingle," for rubber sponges, A. H. Smith.....                          | 963 |
| "Outing Assorted Fine Chocolates," for candy, Gray Lithograph Co. ....         | 976 |
| "Princess Assortment Chocolates," for candy, Gray Lithograph Co. ....          | 975 |
| "Princess Chocolates," for candy, Gray Litho. Co. ....                         | 971 |
| "Puritan Chocolates," for candy, Gray Litho Co. ....                           | 968 |
| "Purity Bon Bons and Chocolates," for candy, Gray Litho. Co. ....              | 970 |
| "Purity Health Chocolates," for candy, Gray Litho. Co. ....                    | 969 |
| "Purity Italian Chocolates," for candy, Gray Litho. Co. ....                   | 966 |
| "Society Chocolates," for candy, Gray Litho Co. ....                           | 967 |

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.



**PERFORATED METALS**  
FOR ALL USES. MADE AS REQUIRED.  
**HARRINGTON & KING PERFORATING CO., CHICAGO.**  
225 N. UNION ST.

**EASIER TO ROW ABSOLUTELY SAFE Mullins Unsinkable Steel Pleasure Boats**  
Write to-day for free catalogue  
15-foot boat, crated \$29.00  
Made of steel. Practically indestructible. Air chamber each end. Cannot sink. Cannot leak. Require no caulking. Ideal boat for family use, summer resorts, parks. Guaranteed. Will not rust. The modern row boat for pleasure, safety and durability. No other boat so desirable.  
**W. H. MULLINS, 384 Depot St., Salem, Ohio**

**SPECIAL MANUFACTURING. DIES AND STAMPINGS TO ORDER.**  
SPEC'L MACHINERY—MODELS—EXPERIMENTAL WORK.  
DROP FORGING DIES AND DROP FORGINGS.  
HARDWARE SPECIALTIES ETC. MANUFACTURED TO ORDER. SEND SAMPLES OR DRAWINGS FOR ESTIMATES. WRITE FOR OUR BOOKLET.  
**THE GLOBE MACHINE & STAMPING CO.,**  
970 HAMILTON ST., CLEVELAND, OHIO.

## Export Trade

**How to Secure and How to Hold It**  
Valuable hints on how to secure Export Trade sent gratis on request. Address  
**EXPORT EXPERT**  
Box 773, New York

**ICE MACHINES.** Corliss Engines, Brewers' and Bottling Machinery. **THE VILTER MFG. CO.,** 899 Clinton St., Milwaukee, Wis.

**MODELS & EXPERIMENTAL WORK.** Inventions developed. Special Machinery. **E. V. BAILLARD, Fox Bldg., Franklin Square, New York.**

**SPECIAL MACHINERY** Tools and Dies. Model Costilo Machine Works, 60 Centre St., New York

**CHEMICAL EXAMINATIONS OF ALL KINDS.** DR. H. C. STIEFEL, Bissell Block, Pittsburgh, Pa.

The National Sheet Metal Works is especially equipped to manufacture small articles, shaped, pressed, cut from sheet metal. White metal casting and plating a specialty.  
**The National Sheet Metal Co., Peru, Ill.**

**MODELS & GEAR.** CATALOGUES FREE. UNION MODEL WORKS 193 CLARK CHICAGO.

**PEACH TREES,** 4 to 6 ft. 3 cts. 3 to 4 ft. 2 cts. Circular free. Trees kept dormant late as May 15 if desired. **R. S. JOHNSTON, Box 75, Stockley, Del.**

**First Class Lathe and Bench Work, Die-Sinking and Chasing.** J. T. WAITE, 275 Water St., New York.

**WORKING MODELS** furnished of your invention. Send drawing and description for estimates. **J. WEINERT & CO., 134 Pierce Ave., Chicago, Ill.**

**"THE CRYSTAL" "ONE CENT"** Plate Glass Gum Vender. Designers and constructors of vending machines of all kinds, on contract.  
**MICHIGAN NOVELTY WORKS, Kalamazoo, Mich.**

**MODEL** Draughting and Experimental Work. Inventions developed. Salable articles. Manufactured on royalty or contract.  
**MARION MODEL WORKS, Box 487, Marion, Ind.**

**National Supply Co., 835 Broadway, N.Y.**  
Model Makers and Manufacturers of  
**PATENTED ARTICLES, ETC.**

**DRYING MACHINES.** S. E. WORRELL Hannibal, Mo.

Are you interested in Patents, Model or Experimental work? Our booklet entitled  
**WHAT WE DO—HOW WE DO IT**  
will be sent to you on request.  
**KNICKERBOCKER MACHINE WORKS, Inc.,**  
8-10-12 Jones Street, New York.

**\$62.00 TO LOS ANGELES AND SAN FRANCISCO AND RETURN VIA THE NICKEL PLATE ROAD.**

Tickets on sale April 22d to May 1st inclusive. Good returning until June 30th, 1904. Stop off privileges. For full particulars see local Agents, or write R. E. Payne, General Agent, 291 Main St., Buffalo, N. Y., or A. W. Ecclestone, D. P. A., 385 Broadway, New York.

# Radium

SEALED PROPOSALS WILL BE RECEIVED AT the office of the Light-House Engineer, Tompkinsville, N. Y., until 1 o'clock p. m., Monday, May 16, 1904, and then opened, for extending and repairing wharf at New London Buoy Depot, New London, Conn., in accordance with specifications, copies of which, with blank proposals and other information, may be had upon application to Major William T. Russell, Corps of Engineers, U. S. A., Engineer.

**PROPOSAL FOR SEWAGE DISPOSAL.**  
Bids will be received up to ten o'clock A. M., May 12th, 1904, for the erection of a sewage system to include boiler, pumps, reservoirs, and all pipes and connections necessary to install a broad irrigation system for disposal of sewage, at the State Hospital for the Insane, at Danville, Pa.  
The specifications can be had at the Institution and personal inspection of the grounds will be required. The right to reject any bid or estimate is reserved.  
**H. B. MEREDITH, M. D.,**  
Superintendent.

**IMPORTANT TO WIRE MANUFACTURERS**  
For Sale.—Patent and Machine producing staple article of very large consumption made of steel wire. This machine makes at a great saving of cost a much superior article than the one now made by hand. Interested parties can see the machine in operation and get further information by addressing, R. E., box 842, N. Y.

**MODELS & CHICAGO MODEL WORKS**  
ESTABLISHED 1867. 179 E. MADISON ST. CHICAGO, ILL.  
WRITE FOR CATALOGUE OF MODEL SUPPLIES.

**SPLITDORF SPARK COILS**  
25 VANDEWATER ST. N.Y.

**MODEL AND EXPERIMENTAL WORK.** Electrical and Mechanical Instruments. Small Mach'y. **EDWARD KLEINSCHMIDT, 82 W. Broadway, New York.**


**BUILDERS OF Special Machinery.** Models Experimental work. Inventions developed. **THE FENN-SADLER MACH. CO., Hartford, Conn.**

**Dies, Tools, Models and Special Machinery.** Metal Specialties and Stamping Manufactured. **HOEFFT & MOORE, Chicago, U. S. A.**  
OFFICE: 337 PULPIT AVENUE. WORKS: INDIANA & PULASKI STREETS.

**AUTOMOBILE Parts.** Our line of automobile parts is complete and embraces new and original ideas in construction. Send for Catalogue and Prices.  
**OTTO KONGSLOW, Cleveland, Ohio.**

**Specialties** Manufactured. Special machinery built. **Nye Tool & Machine Works, 200 So. Clinton St., Chicago.**


**NAME PLATES—STEEL STAMPS**  
"EMPLOYEE CHECKS, KEY TAGS & BADGES"  
**J. ROBBINS MFG. CO., 58 KNEELAND ST.**  
SEND FOR CATALOGUE—BOSTON, MASS.



**PUNCTURE PROOF HEDGEHORN BICYCLE TIRES**  
TO INTRODUCE WE WILL SELL YOU A SAMPLE \$4.80  
REGULAR \$8.50  
PRICE \$8.50 PAIR FOR ONLY \$4.80  
**STRONG, DURABLE, EASY RIDING, SELF-HEALING NO MORE TROUBLE FROM PUNCTURES**  
Result of 15 yrs. experience. Fully covered by patents. Beware of imitations. No danger from thorns, cactus, pins, glass, tacks or nails. Serious punctures like intentional knife cuts can be readily vulcanized. Guaranteed not to become porous. NOTE the thick tread and puncture-proof sections—will outlast any other make. Soft, elastic and easy riding. We will ship C.O.D. on approval without a cent deposit. If you order direct from this advertisement, sending cash, we will prepay express charges. Pump free with each pair.  
Send for CATALOG "T," showing all makes and kind of tires, bicycle sundries, coaster brakes, built-up wheels, etc., at half-price.  
**MEAD CYCLE CO., Dept. T-59 Chicago, Ill.**

The Spintaroscope, improved, very brilliant, with particle of radium, postpaid, \$9.00  
New Radium Tubes, containing radium and radioactive salts for lecture demonstration, \$7.50  
Ten milligrams radium, 7,000 activity, \$17.50  
**WILLIAMS, BROWN & FAIRLE**  
Dept. 6 915 Chestnut St., Philadelphia, Pa.

"Time trieth Truth"  
and time proveth  
the accuracy of the  
**ELGIN WATCH**  
Every Elgin Watch is fully guaranteed. All jewelers have Elgin Watches. "Timemakers and Timekeepers," an illustrated history of the watch, sent free upon request to  
**ELGIN NATIONAL WATCH CO., ELGIN, ILL.**

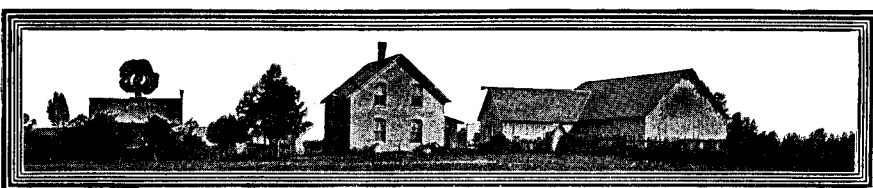

## Put Your Money in Upper Peninsula Land

**\$10.00 down and \$10.00 per month will buy you 40 acres of good farming land in the Upper Peninsula of Michigan.** This land is close to markets, good towns and railroads. Hundreds of settlers will go to this country this Spring and land values will increase. NOW is your time to make a safe, permanent, profitable investment. No it's or an's about it. Write to us to-day—now.

**UPPER PENINSULA LAND CO., Ltd., 846 Washington Arcade, Detroit, Mich.**


F. J. MERRIAM, GEN. MGR.

REFERENCES—ILLINOIS TRUST & SAVINGS BANK, Chicago, Illinois; COLONIAL TRUST COMPANY, New York, N. Y.; CLEVELAND CLIFFS IRON COMPANY, Cleveland, Ohio.



THE WINTON MOTOR CARRIAGE CO., Cleveland, U.S.A.

## Orient Buckboard




With  
Two Speed  
Price, \$425  
4 H. P.  
Weight, 500 lbs

The little machine that has in one year gained a reputation bounded only by the limits of the earth.

Write for catalogue.

WALTHAM MANUFACTURING CO.  
Waltham, Mass.



## CHARTER

GAS and GASOLINE

For All Work.

Stationaries, Portables, Hoisters, Pumps,  
Sawing & Boat Outfits.

Send for Catalogue and Testimonials.

State Your Power Needs.

CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

## STEAM HEATERS

For Manufacturing and Laboratory Purposes

Made with finished surface in various sizes.  
Write for circular and prices.

J. A. STOWELL CO.

Leominster - - - - - Mass.



All varieties at lowest prices. Best Railroad  
Truck and Wagon or Stock Scales made.  
Also 1000 useful articles, including Saws,  
Sewing Machines, Bicycles, Tools, etc. Save  
Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.

## What Is Daus' Tip-Top?



TO PROVE that Daus' "Tip-Top" is  
the best and simplest device for making  
100 copies from pen-written and 50  
copies from typewritten original, we will  
ship complete duplicator, cap size,  
without deposit, on ten (10)  
days' trial.  
Price \$7.50 less \$5 Net  
trade discount or  
\$2.50 per cent.

The Felix F. Daus Duplicator Co., Daus Bldg., 111 John St., New York



Radium  
Finest selected specimens Pitchblende and Carnotite—  
radium ores—by express \$1 each. Will make picture  
through block of wood, etc. Radium of moderate  
activity—affects photo plate vigorously in two hours  
or less—\$10 per gram. H. H. BUCKWALTER, 718 Lincoln, Denver, Colo.

## MICROSCOPES

Our Microscopes, Microtomes,  
Laboratory Glassware, Chemical  
Apparatus, Chemicals, Photo  
Lenses and Shutters, Field Glasses,  
Projection Apparatus, Photo-Micro  
Cameras are used by the leading  
Laboratories and Government De-  
partments Round the World. Catalogs  
free.

Bausch &amp; Lomb Opt. Co.

ROCHESTER, N. Y.

New York Chicago Boston Frankfurt, G'y

## Coats of Arms

Established for Trade-Marks,  
Stationery, Carriage and Auto-  
Panels, Etc.  
Genealogies Traced.  
Colonial Records and Registers  
Scrutinized.

Revolutionary Lineages.

St. Botolph Research Bureau  
181 St. Botolph St., BOSTON, MASS.



Shippers Buyers Superintendents  
Clerks Managers Foremen  
Salesmen Bookkeepers Stenographers

## Learn Business System

The development within ten years of Scientific  
BUSINESS SYSTEM marks a new  
vocation for bright young men; many are now  
employed by the several firms of high reputa-  
tion who make it a business (not of auditing)  
but of systematizing factories and stores from  
receipt of goods or raw material to output.  
Others who have learned the principles of  
Modern Business System are filling lucrative po-  
sitions in factories or stores. The demand for  
men so trained greatly exceeds the supply.  
For full particulars address Dept. B.

BOSTON SCHOOL OF BUSINESS SYSTEM  
227 Washington St., Boston, Mass.

ON GUNS, TOOLS & CYCLES  
**RUST PREVENTED**  
BY **MANNOCITIN**  
CHAMBERS & CO. CHICAGO, ILL. U.S.A.  
15 to 21 Clinton Street.

# W. L. DOUGLAS SHOES

\$10,000.00

REWARD

will be paid to any one who can prove  
that W. L. Douglas does not make and  
sell more men's \$3.50 shoes than  
any other manufacturer in the world.

The reason W. L. Douglas \$3.50 shoes are worn by more men in all  
stations of life than any other make is because they hold their shape, fit  
better, wear longer and are of greater value than any other \$3.50 shoe.

2,473,464 PAIRS OF FINE SHOES WERE MADE  
AND SOLD BY W. L. DOUGLAS IN 1903.

"For years I could not believe it possible to make a first-class shoe for \$3.50, until at last I  
tried a pair of your \$3.50 shoes. I am now convinced that W. L. Douglas \$3.50 shoes are  
the best in the world for the money."—Merritt L. Brown, with Knox, the Hatter, New York.

W. L. Douglas High-Grade Boys'  
Shoes, \$2.00 and \$1.75.

Douglas uses Corona Colskin in his \$3.50  
shoes. Corona Colt is conceded everywhere  
to be the finest patent leather yet produced.

Fast Color Eyelets Used Exclusively.

W. L. DOUGLAS, 157 SPARK STREET, BROCKTON, MASSACHUSETTS.


Douglas has the largest men's \$3.50 Shoe Mail Order  
Business in the world. No trouble to get a fit by mail.  
State size and width: narrow, medium or wide toe;  
with or without cap on toe; kind of leather desired;  
congress, lace or button. 25c. extra prepay delivery.  
W. L. Douglas \$3.50 shoes are sold through his own  
retail stores in the principal cities, and shoe dealers  
everywhere. No matter where you live, Douglas shoes  
are within your reach. If you desire further informa-  
tion before purchasing, write for Illustrated Catalogue.

## SAVE ONE THIRD

By Buying of the Makers

We are actual manufacturers—not a commission house.  
We can and do save our customers one third on retail prices  
by selling direct to user and cutting out all dealers' profits.  
All our goods carry our guarantee. Our free illustrated cata-  
logue shows a greater assortment of carriages and harness  
than any dealer can show you. Send for it.

THE COLUMBUS  
CARRIAGE AND HARNESS COMPANY,  
COLUMBUS, OHIO.



# THE GRIFFIN MILL

is conceded to be the highest type of mill for Portland Cement work  
ever produced. 579 sold in two years to the following large Portland  
Cement Works in the United States and Canada:

|                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Lehigh Portland Cement Co.,<br>Lehigh Portland Cement Co.,<br>Lehigh Portland Cement Co.,<br>Central Cement Co.,<br>Glens Falls Portland Cem. Co.,<br>Cuyaga Lake Cement Co.,<br>National Portland Cement Co.,<br>Sandusky Portland Cement Co.,<br>Newaygo Portland Cement Co.,<br>Great Northern Portland Cement Co., | Ormsd., Pa.<br>Mitchell, Ind.<br>Wellston, Ohio<br>Coplay, Pa.<br>Glens Falls, N. Y.<br>Ithaca, N. Y.<br>Durham, Ont.<br>Syracuse, Ind.<br>Newaygo, Mich.<br>Baldwin, Mich. | Texas Portland Cement & Lime Co., Dallas, Tex.<br>Iola Portland Cement Co., Iola, Kan.<br>Wabash Portland Cement Co., Wabash, Ind.<br>Kansas Portland Cement Co., Iola, Kansas<br>Alma Cement Co., Wellston, Ohio<br>Aetna Portland Cement Co., Fenton, Mich.<br>Penn-Allen Portland Cement Co., Allentown, Pa.<br>Martins Creek Portland Cement Co., Martins Creek, N. J.<br>Wolverine Portland Cement Co., Coldwater, Mich.<br>Bronson Portland Cement Co., Bronson, Mich.<br>Quaker Portland Cement Co., Sandusky, Pa.<br>Diamond Cement & Litho. Stone Co., Chicago, Ill.<br>Mississippi Val. Portland Cem. Co., Louisiana, Mo.<br>Belleville Portland Cement Co., Belleville, Ont.<br>Toledo Portland Cement Co., Manchester, Mich. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Surely that is evidence enough  
of its great superiority over all  
other makes. The way it  
works is the reason; most  
work, best work, in least  
time, at least expense.

Illustrated catalogue shows what you need. And it is free!

BRADLEY PULVERIZER COMPANY, 92 State St., Boston, Mass.


ACCURATE  
RELIABLE  
DURABLE

## New England WATCHES

STYLISH &  
EFFECTIVE  
IN DESIGN

Perfection in time-keeping quality, combined with beauty of design, must of  
necessity create that feeling of satisfaction known to the users of our watches

THE NEW ENGLAND WATCH CO., 37 & 39 Maiden Lane, New York  
7 Snow Hill, London, England



COMPLETE  
20 LIGHT  
OUTFIT  
\$450


We have complete  
Outfits for . . .

## YOUR OWN ELECTRIC LIGHTS

Any size place, summer homes, launches, yachts, etc.  
Every detail included; very best material; practical.  
So simple no electrician required. **Light All the Time**,  
as storage battery included. Gas, Gasoline or Steam  
engines used give plenty of power for pumping water,  
sawing wood, refrigeration, etc. For printed matter  
address

ELECTRIC DEPARTMENT

RICHARDSON ENGINEERING CO., Hartford, Conn.



## A Practical Car for American Roads.

Three Speeds and Reverse, Sliding Transmission, Inter-  
locking Devices Throughout, Bevel Gear Drive  
Direct in Top Speed.

2 cylinder upright motor, 18-20 Horse Power.  
4 " " " 32-35 " "

Prices \$2,300 to \$4,000.

Aluminum Bodies. Canopy Top or Limousine Types.  
Descriptive Catalogue sent upon request.

ROYAL MOTOR CAR CO.,  
100 Marquette St., Cleveland, Ohio, U.S.A.

## AMERICAN JUMP SPARK IGNITION OUTFITS



MARINE

AUTOMOBILE



STATIONARY


MOTORCYCLE

SEE CATALOGUE W.

AMERICAN COIL COMPANY, Somerville, Mass.

## COLD GALVANIZING.

AMERICAN PROCESS NO ROYALTIES  
SAMPLES AND INFORMATION ON APPLICATION.



## NICKEL

Electro-Plating

Apparatus and Material.

THE

Hanson &amp; Van Winkle

Co.,

Newark, N. J.

32 William St., N. Y.

30 &amp; 32 S. Canal St.

Chicago.



O-O-O-O!

## BE YOUR OWN BOSS

## Better than a bank account

An opportunity to make one's self independent. Own  
what is better than a bank account, and learn what no  
one can take from you: the profession of a Watchmaker,  
Engraver, and Optician. By taking a course in our  
school you become a skilled Watchmaker, Engraver, and  
Optician equipped to bear the brunt of life's battles, and  
earn at the outset from \$1,000 to \$1,200 per year.  
The standing of this school insures prompt recogni-  
tion for our graduates as well as profitable positions.—  
The greatest watchmaking center in the world,  
Dept. A. Pamphlet mailed free upon request.

Waltham Horological School Waltham, Mass



## BRISTOL'S RECORDING INSTRUMENTS.

Pressure Gauges, Vacuum Gauges, Volt-  
meters, Amperemeters, Wattmeters, and  
Thermometers, make continuous records  
Day and Night. Will pay for themselves.  
Every instrument fully guaranteed and  
sent on 30 days' trial. Send for Circu-  
lars and Specimen Chart.

The Bristol Company, Waterbury, Conn.

SILVER MEDAL PARTS EXPOSITION.



The culmination of progressive enterprise

Western Two-Speed Gear, Eastern  
Department, Coaster Brake Department, Conn.

## CHAINLESS BICYCLES

Catalogues free at our 10,000 dealers' stores or any one  
catalogue mailed on receipt of 2-cent stamp.

POPE MANUFACTURING  
COMPANY



## Hoggson Pocket Time Stamp

Prints Year, Month, Day, Hour and Min-  
ute, correctly timing every act, operation  
or transaction. An absolute necessity in  
every business. S. H. HOGGSON & CO.  
207-209 West 17th Street, New York.

JESSOP'S STEEL THE VERY  
BEST  
FOR TOOLS, SAWS, ETC.  
WM JESSOP & SONS 91 JOHN ST NEW YORK